


CHECK VALVE

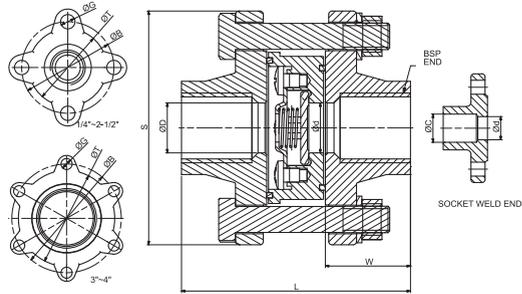

THREADED END, 1/2" - 4"

G1FM408-17-R0


TYPE FM 408

- WAFER DISC CHECK VALVE
- BODY ASTM-A351-CF8M
- RATING PN40/ PN16/ PN10/ 300LBS/ 150LBS/ JIS 10K/ 20K
- 3-PC DESIGN
- THREADED/ BUTT WELD/ SOCKET WELD CAP

Dimensions

Unit :mm

SIZE	DN	Ød	ØB	ØD	ØC	G	L	W	S	ØT
1/2"	15	15	55	15	-	8.6	67.8	25.4	70.2	46.3
3/4"	20	15	55	20	27.2	8.6	64.8	25.4	70.2	45.6
1"	25	20	63.2	25.1	33.9	8.6	74.6	28.3	79.8	53.6
1-1/4"	32	25	76.4	32	42.6	10.7	76.7	29.8	95.4	65.7
1-1/2"	40	32	87.2	38	48.7	10.8	95.7	35.3	105.6	74.4
2"	50	50	109	50	61.1	10.9	110	38.5	128.6	94.2
2-1/2"	65	65	136	65	76.9	13.9	139	46.4	162.8	121.6
3"	80	80	163.2	80	89.8	16.6	155	52	189.2	143.6
4"	100	100	206	100	115.4	20.1	195.4	67	240	175.4

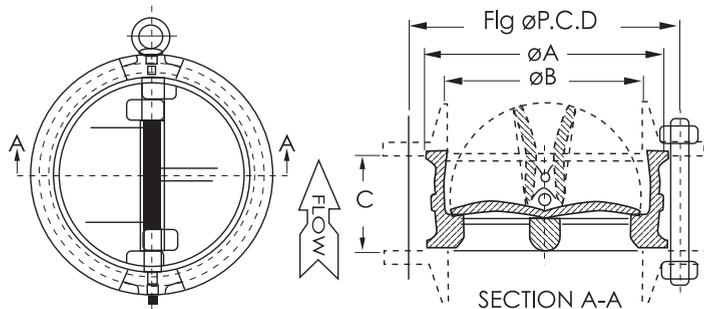

THREADED END, DN40 - DN600

G1FM416-17-R0

TYPE FM 416

- DUAL PLATE WAFER STYLE CHECK, DIN PN16/25/40
- BODY & PLATE ASTM-A351-CF8M/ ASTM-A351-CF8
- FACE TO FACE API-594/ API-6D, SUIT FLANGED FOR ISO-7005-1
- OPTION: MATERIAL OF WCB, CAST IRON

Dimensions

Unit :mm

SIZE	END FACING	PRESSURE RATING	ØA	ØB	ØC	DIA. OF BOLT CIRCLE	STUD SELECTION STUD	STUD SELECTION STUD	STRD LENGTH	WEIGHT KGS
DN40	RF	PN6	86	60	43	100.0	4	M12	110	1.5
	RF	PN10-16-25-40	92		43	110.0	4	M16	115	1.5
DN50	RF	PN6	96	60	60	110.0	4	M12	135	2.5
	RF	PN10/16/25/40	105		60	125.0	4	M16	140	2.5
DN65	RF	PN6	115	73	67	130.0	4	M12	140	2.7
	RF	PN10/16	124		67	145.0	8	M16	150	2.7
DN80	RF	PN25/40	124	89	67	145.0	8	M16	155	2.7
	RF	PN6	132		73	150.0	4	M16	145	4.5
DN100	RF	PN10/16	137	114	73	160.0	8	M16	155	4.5
	RF	PN25/40	137		73	160.0	8	M16	165	4.5
DN125	RF	PN6	146	141	73	170.0	4	M16	150	8.0
	RF	PN10/16	156		73	180.0	8	M16	160	8.0
DN150	RF	PN25/40	168	168	73	190.0	8	M20	165	8.5
	RF	PN6	181		86	200.0	8	M16	160	10.0
DN200	RF	PN10/16	187	219	86	210.0	8	M16	165	10.0
	RF	PN25/40	194		86	220.0	8	M24	180	13.0
DN200	RF	PN6	207	219	98	225.0	8	M16	175	13.0
	RF	PN10/16	217		98	240.0	8	M20	180	13.0
DN200	RF	PN25/40	224	219	98	250.0	8	M24	200	23.0
	RF	PN6	257		127	280.0	8	M16	210	28.0
DN200	RF	PN10	267	219	127	295.0	8	M20	180	28.0
	RF	PN16	267		127	295.0	12	M20	215	28.0
DN200	RF	PN25	276	219	127	310.0	12	M24	235	28.0
	RF/R-49	PN40	290		127	320.0	12	M27	270	36.0

*DRAWING FROM DN250 IS OFFERED UPON REQUEST