


ARCH Bollard I-Beam

BOL/ARCI

DESCRIPTION

The Arch Bollard I-Beam is ideal for commercial application. Best suited for ground lighting on driveways and pathways. It has a minimal, contemporary aesthetic that will blend into any architectural setting. This luminaire features a Type II optic that casts a very long but narrow downwards illumination, or Type IV optic which gives a forward throw beam pattern. The result is an extremely low glare light fitting with precise light placement.

All Hunza products have an extra layer of powdercoat to ensure maximum corrosion protection.

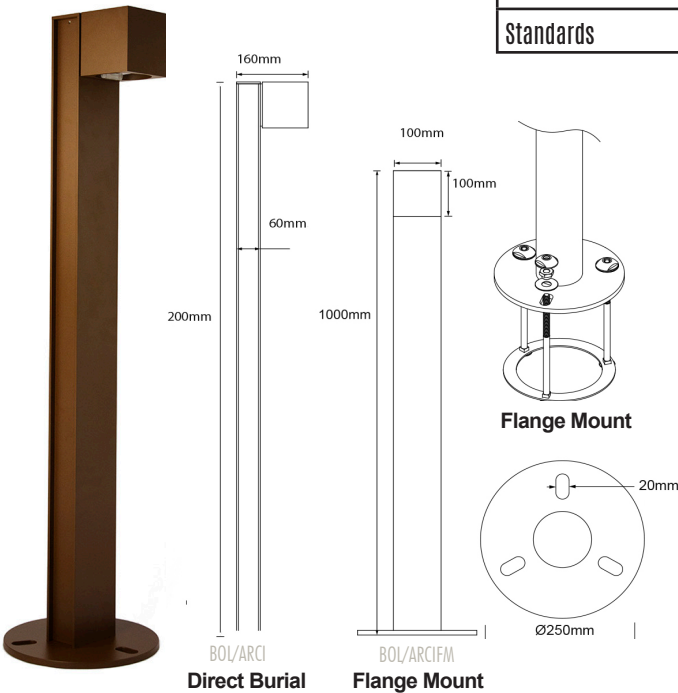

PURE LED

| | |
|------------------------|--|
| LED Chip | Cree CXA 1830 Plug-and-Play, field replaceable LED, 37Vf |
| Output | 3000 Lumens @ 700mA |
| Lumens Per Watt | 100 lm/W |
| Power Consumption | 26 watts |
| Colour Temperature | 2700K, 3000K and 4000K |
| CRI Warm White (3000K) | 80+ standard, 90+ optional |
| Beam Angle | Type II, Type IV |



*Specification for pureled only no retrofit lamp options available for this fixture

PHYSICAL PROPERTIES

| | |
|--------------------|-----------------------------|
| Materials | Powdercoated Aluminium |
| Ingress Protection | IP66 |
| Standards | BS/EN 60598.2.2, UL1598, CE |

POWER SUPPLY OPTIONS

NO DRIVER REQ FOR RETRO 'R' (INTEGRAL 230V IN)
DRIVER REQ FOR SERIES WIRED (CC FORMAT) **
TRANSFORMER REQ FOR PARALLEL WIRED (CV FORMAT) ***

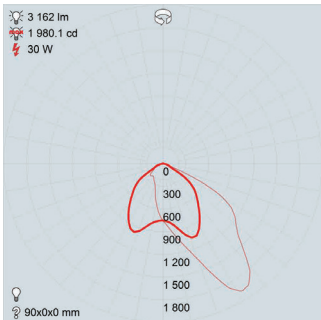

CATEGORY
ARCHITECTURAL ULTRA RANGE

LUMINAIRE

BOL/ARCI
BOL/ARCI FM
Arch flange mount

POWER

/L/S 700mA INPUT (CC) SERIES WIRED
/L/R RETRO, 110/240V DRIVER
/L/D24 24VDC DRIVER

BEAM

TYP2
TYP4

COLOUR

TYP2 TYPE 2 OPTIC 2
TYP4 TYPE 4 OPTIC 3
4
39

ACCESSORIES

2700K
3000K
4000K
3000K, 90+ CRI

CJK
MC
DN

CABLE JOINT KIT
MOUNTING CAGE
DOME NUT*

MATERIAL/ FINISH

BK BLACK
BZ BRONZE
OGR OLIVE GREEN
WH WHITE
WB WHITE BIRCH
DG DARK GREY
STAR SILVER STAR
CT CORTEN

/L/S PURELED SERIES WIRED
Constant current driver (included-700mA). Individual fixture require. 37VDC@ 700mA maximum. 0-10 volt dimming.

/L/R PURELED 110/277VAC RETRO DRIVER
Constant current driver (included). Input: 240 VAC. Output: 26 watts total 37VDC@ 700mA 0-10 volt dimming.

/L/D24 PURELED PARALLEL WIRED
Remote 240V - 24DC transformer required. Input: 24VDC. Output: 37VDC @700mA,

*Only available for Flange Mount version

PRODUCT CONFIGURATION