

# Down Light

DL

## DESCRIPTION

The Down Light luminaire has a fixed head to give a dramatic one way, wash-lighting effect on walls. It can be mounted either upwards or downwards and is suitable for mounting onto timber, masonry or stone. This luminaire is water resistant, complete with a mounting base and stainless steel screws.



PURE LED	
LED Chip	Cree XHP-50-2 Plug and Play, field replaceable LED board, 6Vf
Output	600 lumens @ 1050mA max
Lumens Per Watt	100lm/W
Power Consumption	6 watts @1050mA
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	90 standard
Beam Angle	15, 25, 38, 60 degrees


\*Specification for pureled only for retrofit lamp options please see alternative lamps page.

PHYSICAL PROPERTIES	
Materials	Powdercoated Aluminium, Solid Copper or 316 Stainless Steel
Ingress Protection	IP56/IP66
Standards	As/NZS 61046, UL1838, CSA C22.2 No. 250.7

POWER SUPPLY OPTIONS	
DRIVER REQ FOR SERIES WIRED ( CC FORMAT ) **	TRANSFORMER REQ FOR PARALLEL WIRED ( CV FORMAT )***
NO DRIVER REQ FOR RETRO 'R' ( INTEGRAL 230V IN )	NO DRIVER REQ FOR GU10

\*\* See pages 3-5,7,9 power supplies

\*\*\* See pages 11-12 power supplies

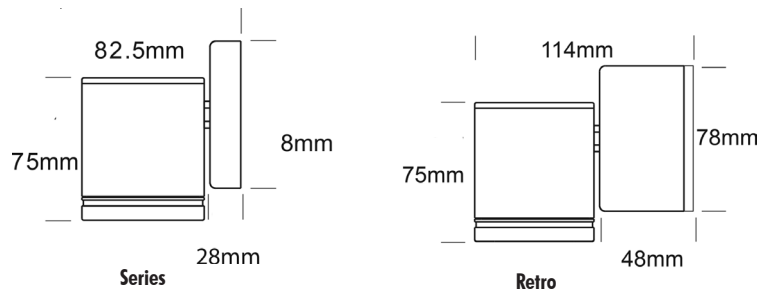

CATEGORY  
WALL MOUNT

### LUMINAIRE

DL

- /L/S
- /L/D3
- /L/D7
- /L/D10
- /L/R
- MR16
- MR16/R
- GU10

### POWER

- 1050mA INPUT (CC) SERIES WIRED
- 2W, 12VAC INPUT (CV) PARALLEL WIRED
- 4W, 12VAC INPUT (CV) PARALLEL WIRED
- 6W, 12VAC INPUT (CV) PARALLEL WIRED
- 4W, RETRO, 110/240V DRIVER
- 12V 5W RETROFIT LAMP
- 5W RETROFIT LAMP with integral 230V Driver
- 7W SORAA RETROFIT LAMP 230V

### BEAM

- 15
- 25
- 38
- 60

### COLOUR

- 15°
- 25°
- 38°
- 60°

### ACCESSORIES

- 2
- 3
- 4
- 2700K
- 3000K
- 4000K
- HCL
- SNT
- GG
- FL
- CJK
- HEX CELL LOUVRE
- SNOOT
- GLARE GUARD
- FROSTED LENS
- CABLE JOINT KIT

### MATERIAL/ FINISH

- BK
- BZ
- OGR
- WH
- WB
- DG
- STAR
- CT
- COP
- SS
- BLACK
- BRONZE
- OLIVE GREEN
- WHITE
- WHITE BIRCH
- DARK GREY
- SILVER STAR
- CORTEN
- SOLID COPPER
- STAINLESS STEEL

#### /L/S PURELED SERIES WIRED

Remote constant current driver required.  
Individual fixtures require:  
6VDC@1050mA,  
1050mA maximum

#### /L/D PURELED PARALLEL WIRED

Remote 240VAC-12VAC transformer required. Hunza integrated plug and play driver included.  
Input:9-15VAC.  
Output: 6VDC @ D3=350mA,  
D7=700mA, D10=1050mA

#### /L/R PURELED 110/240VAC RETRO DRIVER

Input: 110/240VAC, 12 Watt max (included)  
Output: 1-18VDC, 700mA

PRODUCT CONFIGURATION