


## BOL700

The Bollard 700 is ideal for gardens, driveways, walkways, car parks, etc. The lens has a mirror finished, twin angle reflector and UV stable acrylic lens with anti-glare mesh. This lens reflects light at two angles, directly onto the ground and horizontally to illuminate the surrounding landscape.

CATEGORY  
POLE MOUNTED

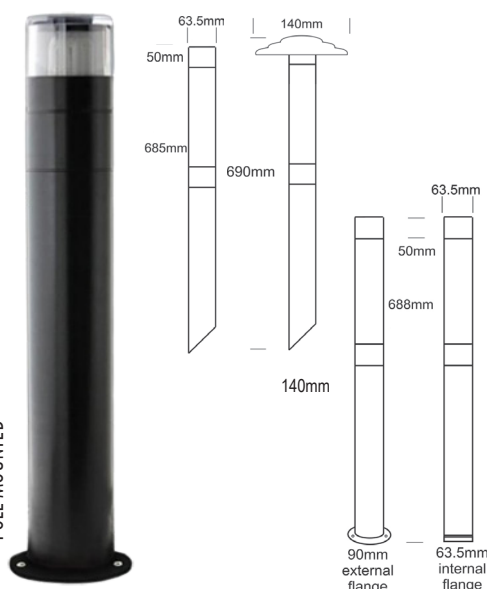

LED Chip	Cree XHP-50-2 Plug and Play, field replaceable LED board, 6Vf
Output	510 lumens @ 1050mA max
Lumens Per Watt	85lm/W
Power Consumption	6 watts @1050mA
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	90 standard
Beam Angle	360 degrees

\*Specification for pureled only for retrofit lamp options please see alternative lamps page.

Materials	Powdercoated Aluminium, Solid Copper or 316 Stainless Steel
Ingress Protection	IP56/IP66
Standards	AS/NZS 61046, UL 1838, 2108, CSA C22.2 No. 250.7, 250.0-08, CE

DRIVER REQ FOR SERIES WIRED ( CC FORMAT ) \*\* | TRANSFORMER REQ FOR PARALLEL WIRED ( CV FORMAT )\*\*\*  
NO DRIVER REQ FOR RETRO 'R' ( INTEGRAL 230V IN ) | NO DRIVER REQ FOR GU10

\*\* See pages 3-5,7,9 power supplies

\*\*\* See pages 11-12 power supplies

## PRODUCT CONFIGURATION

## BOL700

11

11

11/11/2019

11

11

- |       |                                     |
|-------|-------------------------------------|
| 1/S   | 1050mA INPUT (CC) SERIES WIRED      |
| 1/O3  | 2W, 12VAC INPUT (CV) PARALLEL WIRED |
| 1/O7  | 4W, 12VAC INPUT (CV) PARALLEL WIRED |
| 1/O10 | 6W, 12VAC INPUT (CV) PARALLEL WIRED |
| 1/R   | 6W, RETRO, 10/240V DRIVER           |
| MR16  | 5W RETROFIT LAMP 12V                |
| GU10  | 7W SORAA RETROFIT LAMP 230V*        |

\* Use with flange mount only.

- |     |      |    |               |
|-----|------|----|---------------|
| 360 | 360° | 2  | 2700K         |
|     |      | 3  | 3000K         |
|     |      | 4  | 4000K         |
|     |      | 39 | 3000K 90+ CRI |

- |         |                              |
|---------|------------------------------|
| CJK     | CABLE JOINT KIT              |
| BOLOP   | OPAQUE LENS                  |
| HOOD140 | HOOD 140MM                   |
| FM      | FLANGE MOUNT                 |
| FM90    | EXTERNAL FLANGE<br>MOUNT 90° |

- |           |                 |              |
|-----------|-----------------|--------------|
| ALUMINIUM | BK              | BLACK        |
|           | BZ              | BRONZE       |
|           | OGR             | OLIVE GREEN  |
|           | WH              | WHITE        |
|           | WB              | WHITE BIRCH  |
|           | DG              | DARK GREY    |
|           | STAR            | SILVER STAR  |
|           | CT              | CORTEN       |
|           | COP             | SOLID COPPER |
| SS        | STAINLESS STEEL |              |

Remote constant current driver required.  
Individual fixtures require:  
6VDC@1050mA,  
1050mA maximum

Remote 240VAC - 12V AC transformer required. Hunza integrated plug and play driver included.  
Input: 9-15VAC.  
Output: 6VDC @ D3=350mA, D7=700mA, D10=1050mA

Input: 110/240VAC, 12 Watt max  
(included)  
Output: 1-18VDC, 700mA