


## CURRENT PROBE

The F-14 is used to measure currents on 50 Hz, 60 Hz, and 400 Hz powerlines. Primary power currents of 400 amperes (DC – 400 Hz) will not alter the transfer impedance. It can be used to measure conducted emissions and investigate low level harmonics.

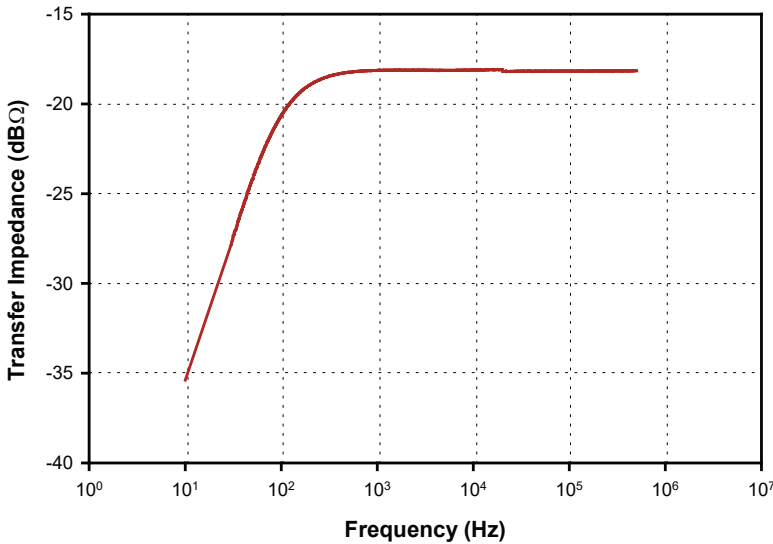

### Specifications

Frequency:	10 Hz – 500 kHz
Internal diameter:	32 mm
External diameter:	94 mm
Height:	64 mm
ZtΩ <sup>1</sup> :	0.12
dBΩ <sup>1</sup> :	-18
Connector:	Type-N
DC to 400 MHz:	400 amperes
RF(CW):	50 amperes
Peak Pulse Current <sup>2</sup> :	500 amperes

1: Probe calibrated with 50 Ω + j0Ω Load Impedance.  
 2: Depends upon the pulse width and pulse rep. rate.



Fischer Custom Communications, Inc.

20603 Earl St., Torrance, CA 90503  
**Phone:** 310-303-3300  
**Fax:** 310-371-6268  
**Email:** sales@fischercc.com

© Fischer Custom Communications, Inc.