

GLASHÜTTE LIMBURG**Product data sheet****Ceiling luminaire****50 174.4**

Project · Reference number

Date

Application

LED ceiling luminaire with hand-blown opal glass and metal housing for non-glare light deflected downwards.

The used LED technique offers durability and optimal light output with low power consumption at the same time.

Product description

LED ceiling luminaire »STUDIO LINE«

Aluminium luminaire housing,
velvet black enamel finish,

Inside hue matt brass

Metal luminaire mounting plate,
finish white enamel

Hand-blown opal glass, satin matt,
with bayonet closure

2 fixing holes \varnothing 5.5 mm

180 mm spacing

2 cable entries for through-wiring for mains

cable up to \varnothing 10.5 mm max. $3 \times 1.5^{\square}$

Connecting terminal 2.5^{\square}

Earth conductor connection

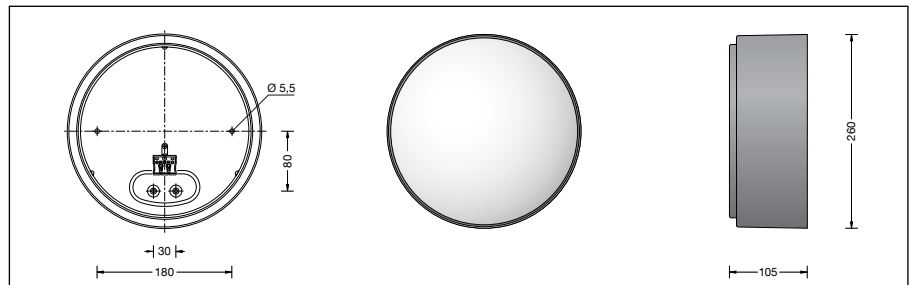
LED power supply unit

220-240 V \sim 50-60 Hz

Safety class I

CE – Conformity mark

Weight: 1.7 kg

**Lamp**

Module connected wattage	11.9 W
Luminaire connected wattage	16.1 W
Rated temperature	$t_a = 25^{\circ}\text{C}$
Service life criteria	50 000 h/L ₇₀

Article No. 50 174.4

Interior colour options	
• matt aluminium	
• matt brass	
• matt copper	

Code number .2
Code number .4
Code number .6

Module designation	LED-0538/930
Colour temperature	3000 K
Colour rendering index	$R_a > 90$
Module luminous flux	1515 lm
Luminaire luminous flux	558 lm
Luminaire luminous efficiency	34,7 lm/W