

BEGA**50 184.4**

Ceiling luminaire for indoor use

Project · Reference number

Date

Product data sheet

Application

LED ceiling luminaire · indoor luminaire with aluminium housing for non-glare light deflected downwards.

The used LED technique offers durability and optimal light output with low power consumption at the same time.

Product description

LED ceiling luminaire »STUDIO LINE«

Aluminium housing shield,

velvet black enamel finish,

Inside hue matt brass

Light diffusing silicone lens

Mounting plate with 2 fixing

holes $\varnothing$ 4.5 mm · 60 mm spacing

Connecting terminals 2.5²

Earth conductor connection

LED power supply unit

220-240 V $\sim$ 0/50-60 Hz

DC 176-264 V

Safety class I

CE – Conformity mark

Weight: 0.3 kg

Inrush current

Inrush current: 6 A / 133 μ s

Maximum number of luminaires of this type per miniature circuit breaker:

B 10 A: 93 luminaires

B 16 A: 150 luminaires

C 10 A: 156 luminaires

C 16 A: 250 luminaires

Lamp

Module connected wattage 4.9 W

Luminaire connected wattage 6.6 W

Rated temperature $t_a = 25^\circ\text{C}$

Ambient temperature $t_{a\text{ max}} = 40^\circ\text{C}$

Module designation LED-0689/930

Colour temperature 3000 K

Colour rendering index $R_a > 90$

Module luminous flux 775 lm

Luminaire luminous flux 281 lm

Luminaire luminous efficiency 42,6 lm/W

Lifetime of the LED

Ambient temperature $t_a = 15^\circ\text{C}$

– at 50,000 h: L 90 B 10

– at > 500,000 h: L 70 B 50

Ambient temperature $t_a = 25^\circ\text{C}$

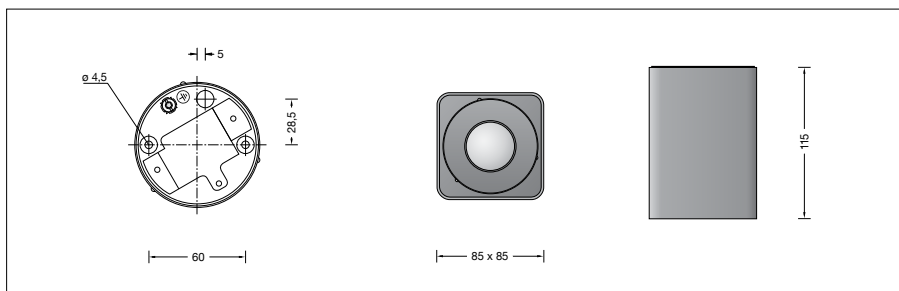
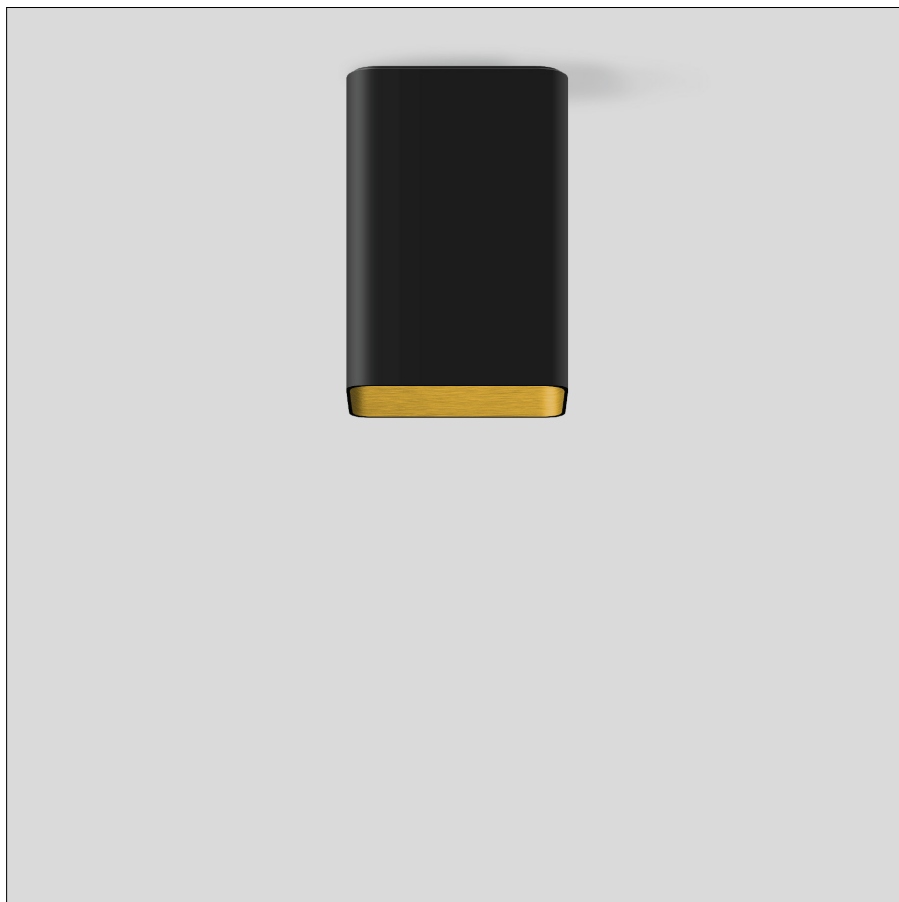
– at 50,000 h: L 90 B 10

– at 454,000 h: L 70 B 50

max. ambient temperature $t_a = 40^\circ\text{C}$

– at 50,000 h: L 80 B 10

– at 178,000 h: L 70 B 50

**Article No. 50 184.4**

Interior colour options

- matt aluminium
- matt brass
- matt copper

Code number **.2**

Code number **.4**

Code number **.6**