

BEGA**50 194**

Ceiling and wall luminaire for indoor use

Project · Reference number

Date

Product data sheet

Application

Ceiling and wall luminaire · indoor luminaire
made of crystal glass, inside white and
metal housing, for all lighting tasks in interior
applications.

Product description

Luminaire made of painted metal housing, finish
white enamel

Crystal glass, inside white

2 fixing holes $\varnothing$ 5.5 mm

100 mm spacing

1 cable entry for mains supply cable

The luminaire is suitable for through-wiring.

Connecting terminals 2.5²

Earth conductor connection

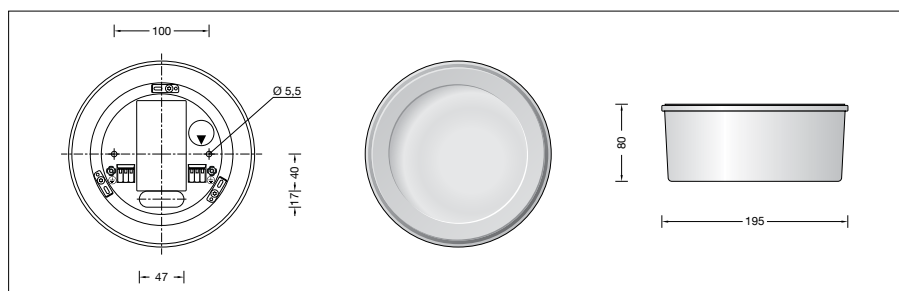
LED-Module for mains voltage

220-230 V $\sim$ 50/60 Hz

Safety class I

CE – Conformity mark

Weight: 1.7 kg

**Lamp**

Luminaire connected wattage

8 W

Rated temperature

$t_a = 25^\circ\text{C}$

Service life criteria

50 000 h / L_{70}

Article No. 50 194

LED colour temperature optionally 3000 K
or 4000 K

3000 K – Article number

4000 K – Article number + **K4**

50 194

Module designation

LED-0662/830

Colour temperature

3000 K

Colour rendering index

$R_a > 80$

Module luminous flux

760 lm

Luminaire luminous flux

552 lm

Luminaire luminous efficiency

69 lm/W

50 194 K4

Module designation

LED-0662/840

Colour temperature

4000 K

Colour rendering index

$R_a > 80$

Module luminous flux

825 lm

Luminaire luminous flux

599 lm

Luminaire luminous efficiency

74,9 lm/W