


Slim Panel - 2x4

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT




- Input Voltage: 100-277V AC, 50-60Hz
- Dimmable: 1-10V dc Dimmer
- Operating Temperature: -20°C to 50°C
- Projected Hours: >50,000 Hrs
- Waterproof Rating: IP40
- Warranty: 5 Years

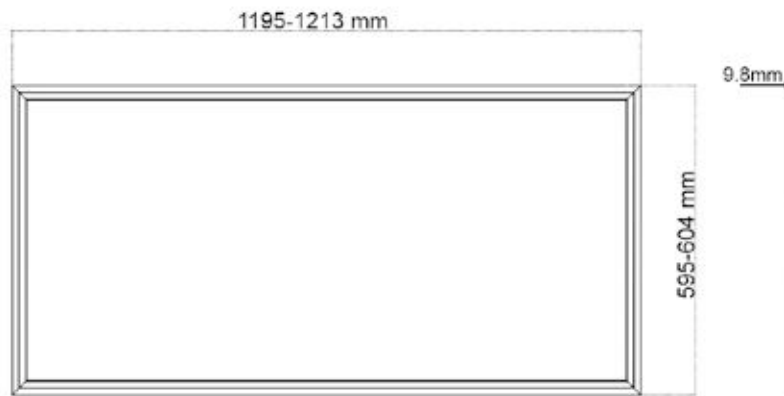

Slim Panel - 2x4

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

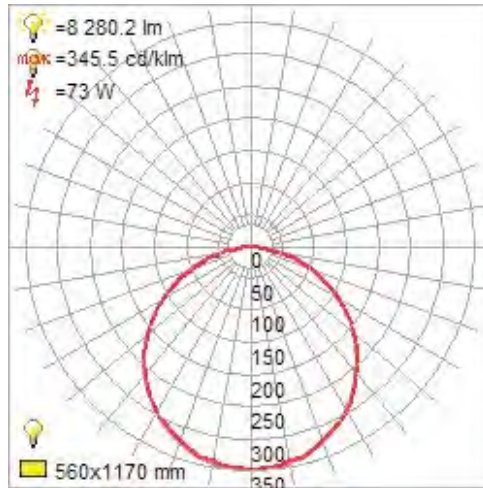

Specification

	50W	72W
AGS Lighting LED Panel Series:	GL50W2X4SC5000KUDX	GL72W2X4SC6500KUDX
Lumens:	5050 lm	7340 lm
CCT:	5000K	6500K
Power Factor:	>0.9	>0.9
Efficacy:	110 lm/W	110 lm/W
CRI:	>80	>80
Dimmable:	Yes	Yes
Dimensions:	2x4	2x4 , 603*1213 mm
Beam Angle:	120°	120°