
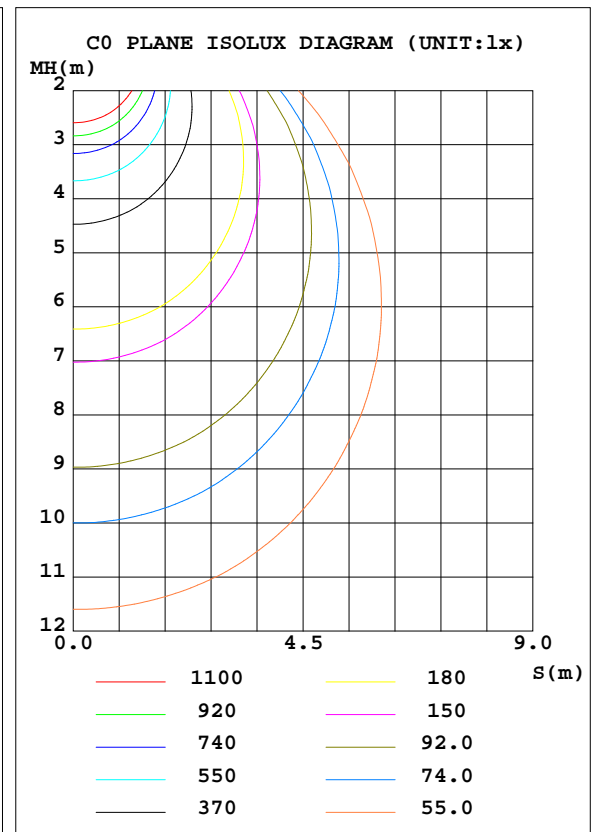


**LUMINAIRE PHOTOMETRIC TEST REPORT**

NAME: TAB0120-200	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: YUANJE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 105.75 lm/W			
MODEL		I <sub>max</sub> (cd)	7204	S/MH(C0/180)	1.27
NOMINAL POWER(W)	200	LOR(%)	100.0	S/MH(C90/270)	1.38
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	20837	η UP, DN(C0-180)	0.0,45.1
NOMINAL FLUX(lm)	20836.5	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0,54.9
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	230	η down(%)	100.0	CIBSE SHR MAX	1.35

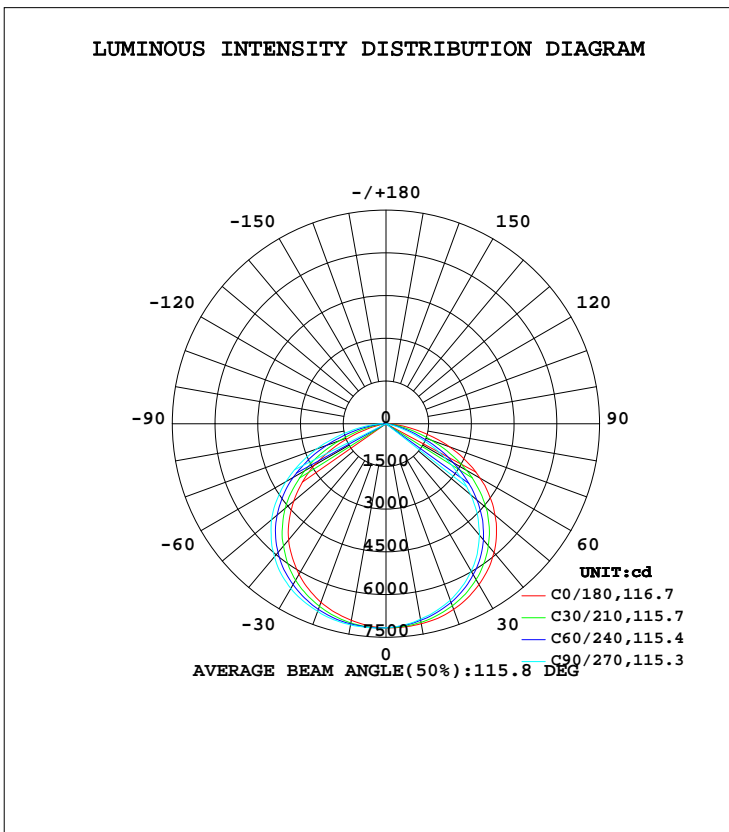

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:0DEG  
 Operators:  
 Test Date:15 January 2019

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.404.6  
 Humidity:65.0%  
 Test Distance:7.700m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	$\Phi$ lum,lamp
10	7130	7063	6966	6968	7009	7108	7172	7204	0- 10	679.7	679.7	3.26,3.26
20	6938	6749	6595	6573	6673	6860	7012	7077	10- 20	1969	2649	12.7,12.7
30	6527	6221	5976	5922	6108	6410	6681	6719	20- 30	3041	5690	27.3,27.3
40	5906	5461	5106	5042	5322	5718	6092	6171	30- 40	3752	9441	45.3,45.3
50	4998	4415	3880	3811	4230	4759	5246	5353	40- 50	3957	13398	64.3,64.3
60	3810	3021	2374	2296	2895	3472	4055	4230	50- 60	3530	16928	81.2,81.2
70	2379	1453	941.2	829.5	1286	1935	2601	2768	60- 70	2487	19416	93.2,93.2
80	857.7	313.0	44.70	12.90	123.8	608.9	1086	1237	70- 80	1166	20582	98.8,98.8
90	12.79	1.163	1.739	2.066	2.548	2.384	113.7	180.0	80- 90	254.7	20837	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:0DEG  
 Operators:  
 Test Date:15 January 2019

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.404.6  
 Humidity:65.0%  
 Test Distance:7.700m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

NAME: TAB0120-200	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: YUANJE	SUR.:	Shielding Angle:

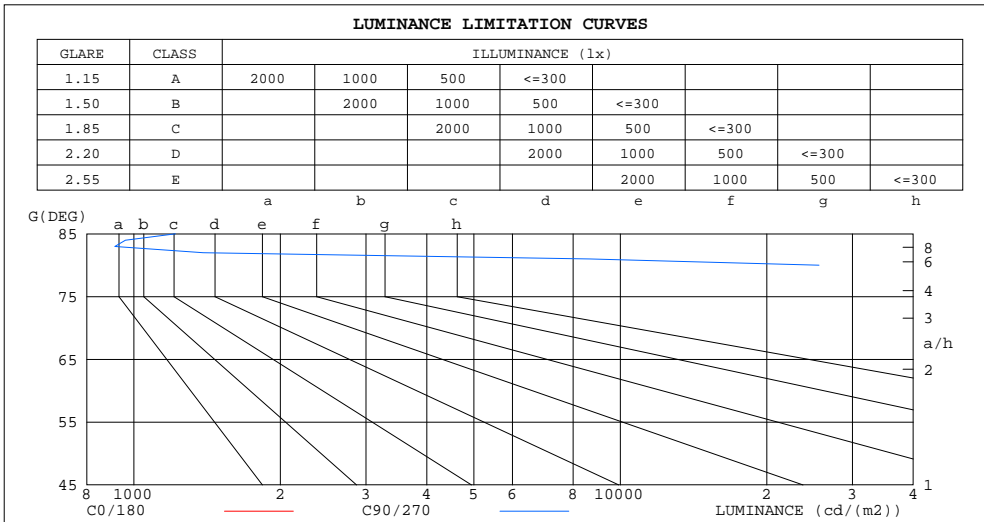

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	348354	1217
80	509795	25614
75	632488	152632
70	717969	273785
65	760972	380055
60	786392	472414
55	799505	542340
50	802585	600510
45	801251	640069


C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature: 0DEG  
 Operators:  
 Test Date: 15 January 2019

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.404.6  
 Humidity: 65.0%  
 Test Distance: 7.700m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: TAB0120-200	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:YUANJE	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.05	1.00	.97	1.02	.99	.95	.98	.95	.92	.94	.92	.89	.91	.89	.87	.85
2.0	.91	.85	.79	.89	.83	.78	.86	.81	.76	.83	.78	.75	.80	.76	.73	.71
3.0	.80	.72	.66	.79	.71	.65	.76	.69	.64	.73	.68	.63	.70	.66	.62	.60
4.0	.71	.62	.56	.70	.62	.55	.67	.60	.55	.65	.59	.54	.63	.57	.53	.51
5.0	.63	.55	.48	.62	.54	.48	.60	.53	.47	.58	.52	.47	.56	.51	.46	.44
6.0	.57	.48	.42	.56	.48	.42	.54	.47	.41	.53	.46	.41	.51	.45	.40	.38
7.0	.52	.43	.37	.51	.43	.37	.49	.42	.36	.48	.41	.36	.46	.40	.36	.34
8.0	.47	.39	.33	.46	.38	.33	.45	.38	.32	.44	.37	.32	.43	.37	.32	.30
9.0	.43	.35	.29	.43	.35	.29	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.39	.32	.27	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

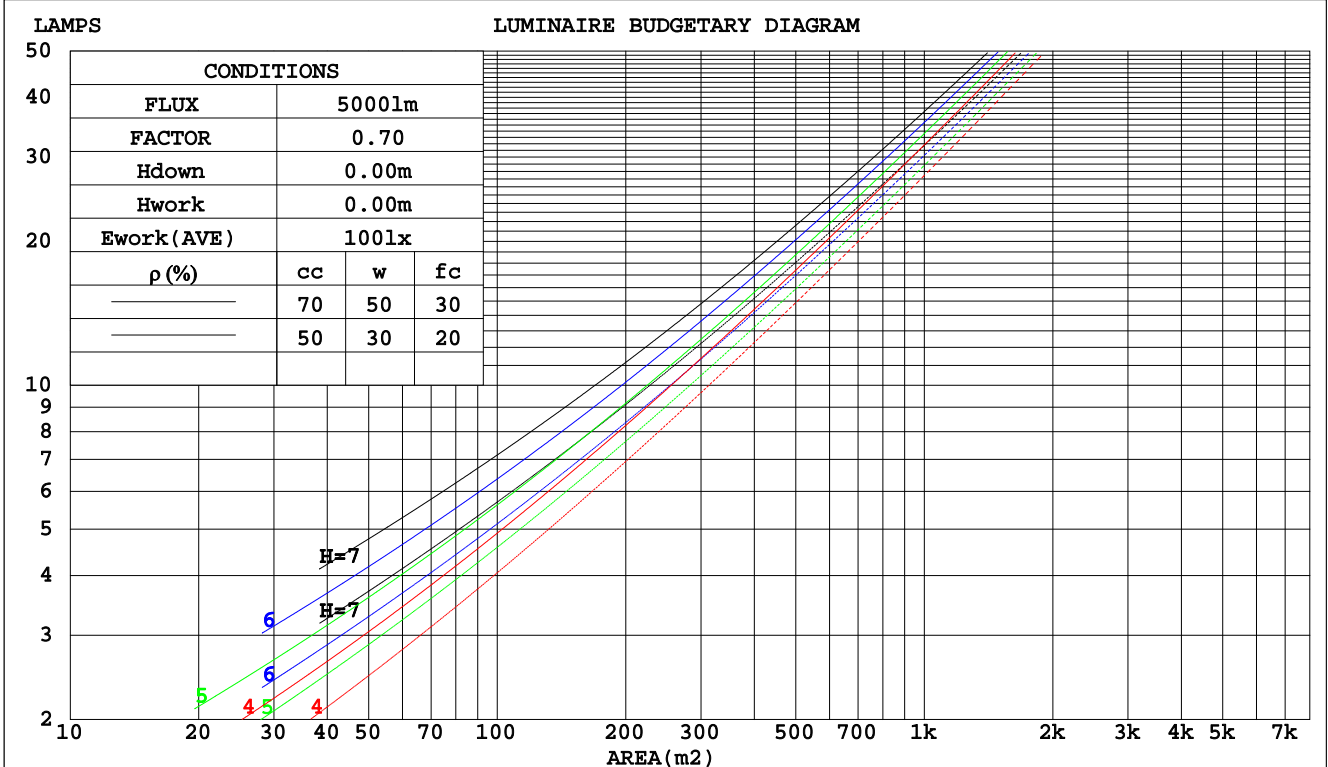

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature: 0DEG  
 Operators:  
 Test Date: 15 January 2019

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.404.6  
 Humidity: 65.0%  
 Test Distance: 7.700m [K=1.0000]  
 Remarks:

WEC AND CCEC

NAME: TAB0120-200	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: YUANJE	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.296	.168	.053	.289	.165	.052	.276	.158	.051	.264	.152	.049	.253	.146	.047	
2.0	.283	.155	.048	.277	.152	.047	.265	.147	.046	.254	.143	.045	.244	.138	.044	
3.0	.264	.141	.042	.259	.139	.042	.248	.135	.041	.239	.131	.040	.230	.127	.039	
4.0	.245	.127	.037	.240	.126	.037	.231	.123	.037	.223	.120	.036	.215	.117	.036	
5.0	.228	.116	.034	.223	.115	.033	.215	.112	.033	.208	.110	.033	.201	.107	.032	
6.0	.212	.106	.030	.208	.105	.030	.201	.103	.030	.194	.101	.030	.188	.099	.029	
7.0	.197	.098	.028	.194	.097	.028	.188	.095	.027	.182	.093	.027	.176	.091	.027	
8.0	.185	.090	.025	.182	.089	.025	.176	.088	.025	.170	.086	.025	.165	.085	.025	
9.0	.173	.084	.023	.171	.083	.023	.165	.082	.023	.161	.080	.023	.156	.079	.023	
10.0	.163	.078	.022	.161	.078	.022	.156	.076	.022	.152	.075	.021	.147	.074	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.179	.156	.135	.153	.134	.117	.105	.092	.081	.060	.053	.047	.019	.017	.015	
2.0	.171	.132	.099	.147	.114	.086	.100	.079	.060	.058	.046	.035	.019	.015	.011	
3.0	.163	.114	.075	.140	.099	.065	.096	.068	.046	.056	.040	.027	.018	.013	.009	
4.0	.156	.101	.059	.134	.087	.051	.092	.061	.036	.053	.036	.021	.017	.012	.007	
5.0	.149	.090	.048	.128	.078	.041	.088	.055	.029	.051	.032	.017	.016	.010	.006	
6.0	.142	.082	.039	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.135	.075	.033	.116	.065	.029	.080	.046	.021	.047	.027	.012	.015	.009	.004	
8.0	.129	.069	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.014	.008	.004	
9.0	.123	.064	.025	.106	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.117	.060	.022	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature: 0DEG  
 Operators:  
 Test Date: 15 January 2019

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.404.6  
 Humidity: 65.0%  
 Test Distance: 7.700m [K=1.0000]  
 Remarks:

UGR(Unified Glare Rating) Table

NAME: TAB0120-200					TYPE:					WEIGHT:				
SPEC.:					DIM.:					SERIAL No.:				
MFR.:YUANJE					SUR.:					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions	Viewed crosswise					Viewed endwise								
x = 2H y = 2H	25.7	27.2	25.9	27.4	27.6	24.0	25.5	24.2	25.7	25.9				
3H	27.2	28.6	27.5	28.8	29.1	24.6	26.0	24.9	26.2	26.5				
4H	27.8	29.1	28.1	29.3	29.6	24.7	26.0	25.0	26.3	26.5				
6H	28.1	29.3	28.4	29.6	29.9	24.6	25.9	24.9	26.1	26.4				
8H	28.2	29.4	28.5	29.7	30.0	24.6	25.8	24.9	26.0	26.3				
12H	28.2	29.4	28.6	29.7	30.0	24.5	25.7	24.9	25.9	26.3				
4H 2H	26.0	27.3	26.3	27.6	27.8	24.6	25.9	24.9	26.2	26.4				
3H	27.6	28.8	28.0	29.1	29.4	25.4	26.5	25.7	26.8	27.1				
4H	28.3	29.3	28.6	29.6	30.0	25.5	26.5	25.9	26.9	27.2				
6H	28.7	29.6	29.1	30.0	30.3	25.5	26.4	25.9	26.7	27.1				
8H	28.8	29.7	29.2	30.0	30.4	25.4	26.3	25.8	26.6	27.0				
12H	28.9	29.6	29.3	30.0	30.4	25.4	26.2	25.8	26.5	26.9				
8H 4H	28.3	29.1	28.7	29.5	29.9	25.7	26.5	26.1	26.9	27.3				
6H	28.7	29.4	29.2	29.9	30.3	25.7	26.4	26.1	26.8	27.2				
8H	28.9	29.5	29.3	29.9	30.4	25.6	26.3	26.1	26.7	27.1				
12H	29.0	29.5	29.4	30.0	30.4	25.6	26.1	26.1	26.6	27.1				
12H 4H	28.2	29.0	28.6	29.4	29.8	25.7	26.5	26.1	26.8	27.2				
6H	28.7	29.3	29.2	29.8	30.2	25.7	26.3	26.1	26.7	27.2				
8H	28.9	29.4	29.3	29.8	30.3	25.6	26.2	26.1	26.6	27.1				
Variations with the observer position at spacings:														
S = 1.0H	+ 0.2 / - 0.2					+ 0.4 / - 0.5								
1.5H	+ 0.2 / - 0.2					+ 0.3 / - 0.7								
2.0H	+ 0.4 / - 0.6					+ 0.5 / - 1.0								

CIE Pub.117, 20837 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 10.6)

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature: 0DEG  
 Operators:  
 Test Date: 15 January 2019

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.404.6  
 Humidity: 65.0%  
 Test Distance: 7.700m [K=1.0000]  
 Remarks:

UTILIZATION FACTORS TABLE

NAME: TAB0120-200	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:YUANJE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	56	49	65	55	49	42
1.00	77	66	58	75	65	58	73	66	58	51
1.25	84	74	67	82	73	66	80	71	65	58
1.50	89	79	72	87	78	72	84	77	71	63
2.00	96	87	81	94	86	80	90	84	79	71
2.50	100	92	86	98	91	85	94	88	83	75
3.00	103	96	91	101	95	90	97	92	88	79
4.00	107	101	97	104	100	95	100	96	93	84
5.00	109	104	101	107	103	99	102	99	96	87
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature: 0DEG  
 Operators:  
 Test Date: 15 January 2019

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.404.6  
 Humidity: 65.0%  
 Test Distance: 7.700m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

NAME: TAB0120-200	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: YUANJE	SUR.:	Shielding Angle:

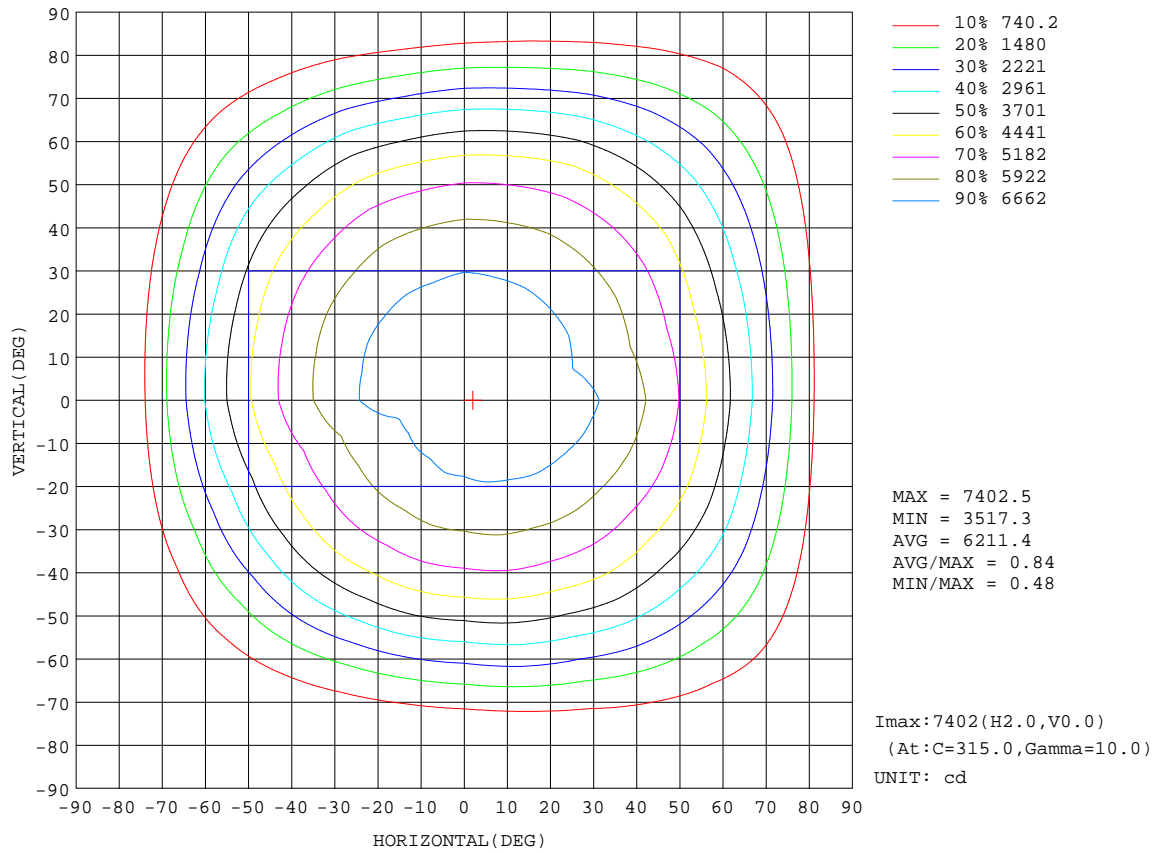


C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature: 0DEG  
 Operators:  
 Test Date: 15 January 2019

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.404.6  
 Humidity: 65.0%  
 Test Distance: 7.700m [K=1.0000]  
 Remarks:



**AAI Figure**

NAME: TAB0120-200	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:YUANJE	SUR.:	Shielding Angle:

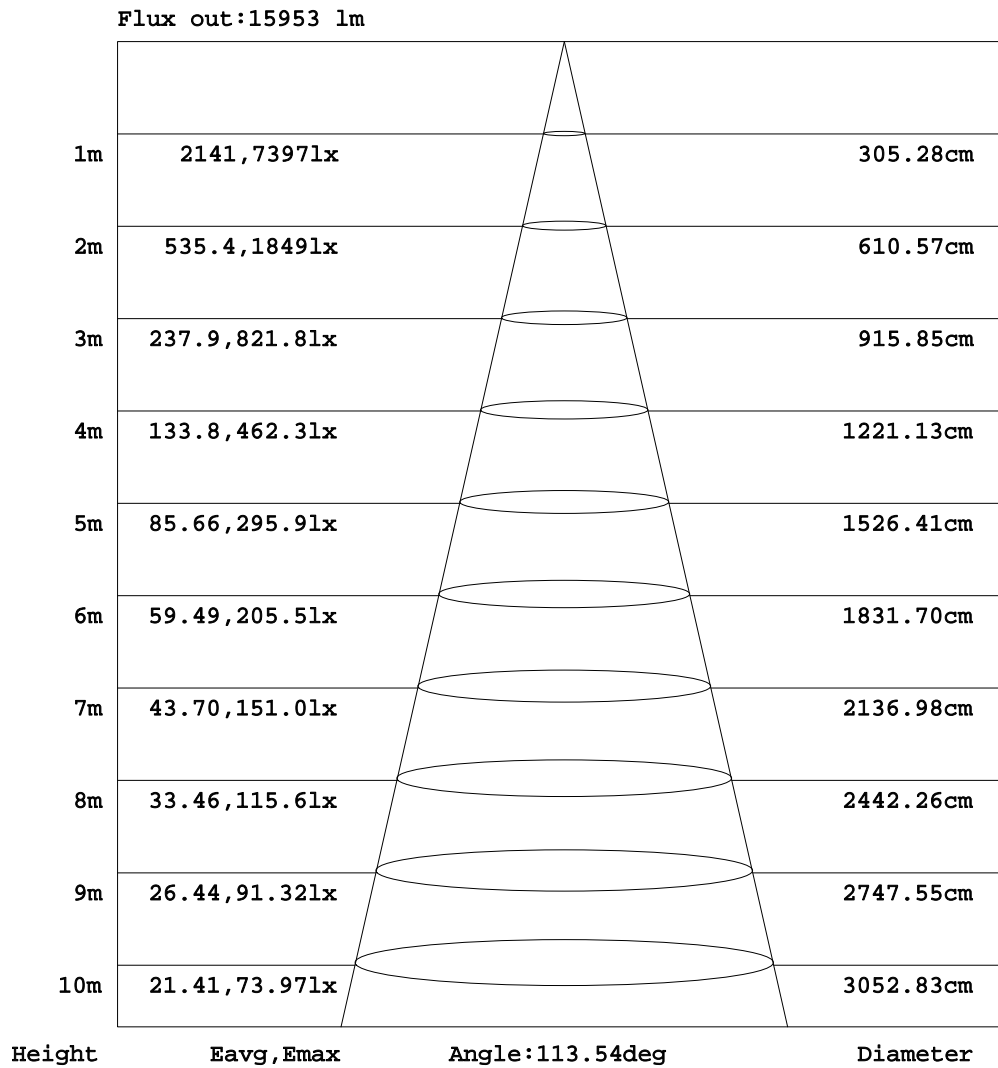


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:0DEG  
 Operators:  
 Test Date:15 January 2019

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.404.6  
 Humidity:65.0%  
 Test Distance:7.700m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

NAME: TAB0120-200	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:YUANJE	SUR.:	Shielding Angle:

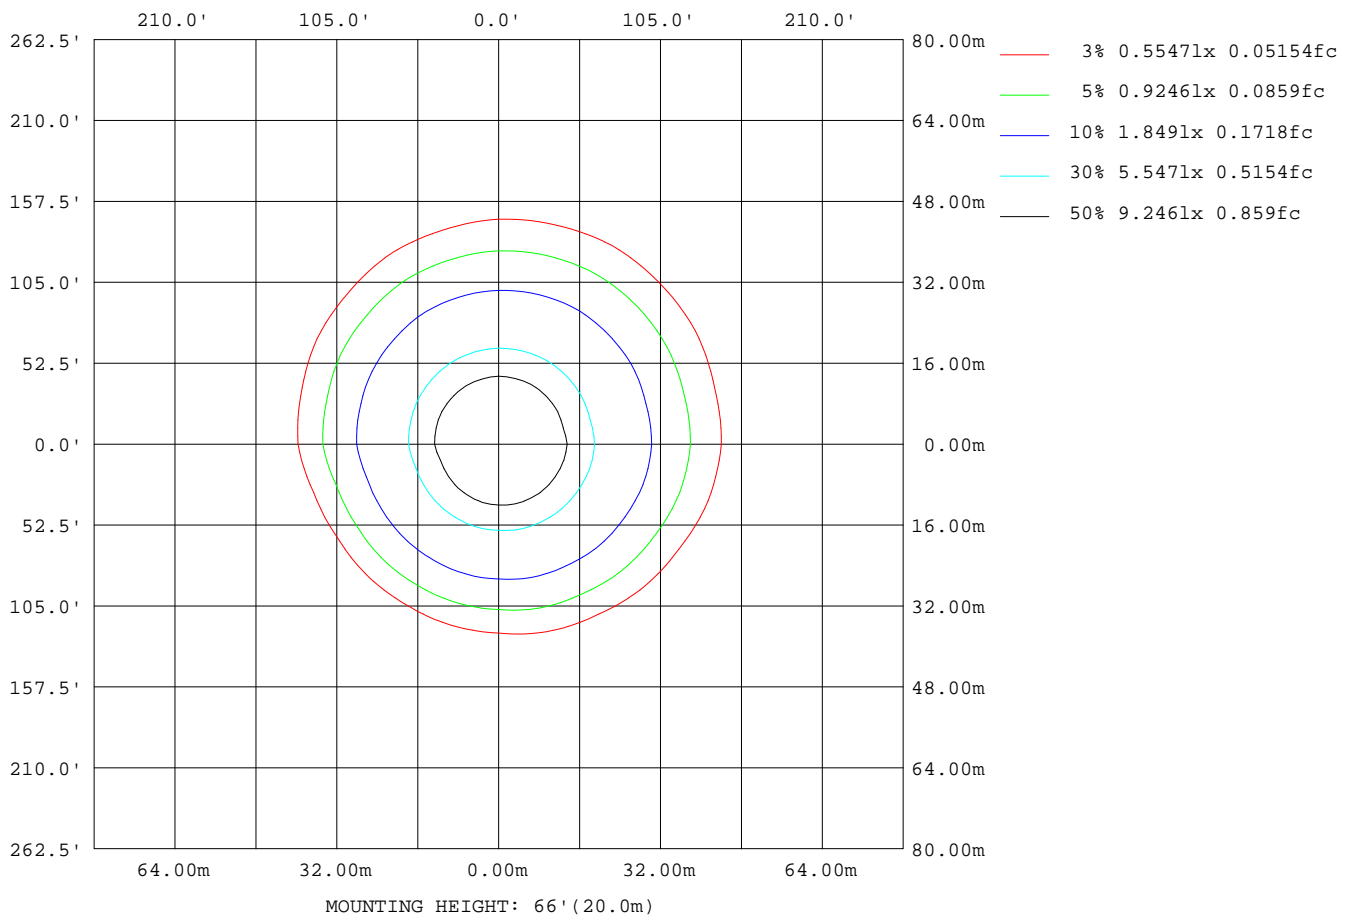

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature: 0DEG  
 Operators:  
 Test Date: 15 January 2019

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.404.6  
 Humidity: 65.0%  
 Test Distance: 7.700m [K=1.0000]  
 Remarks:

LED Avg.L Report

NAME: TAB0120-200	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: YUANJE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	614507
L_0~180(75)av	422342
L_0~180(85)av	170056
L_90~270(65)av	586927
L_90~270(75)av	423361
L_90~270(85)av	296728
L_45(65)av	592055
L_45(75)av	417965
L_45(85)av	234691

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature: 0DEG  
 Operators:  
 Test Date: 15 January 2019

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.404.6  
 Humidity: 65.0%  
 Test Distance: 7.700m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

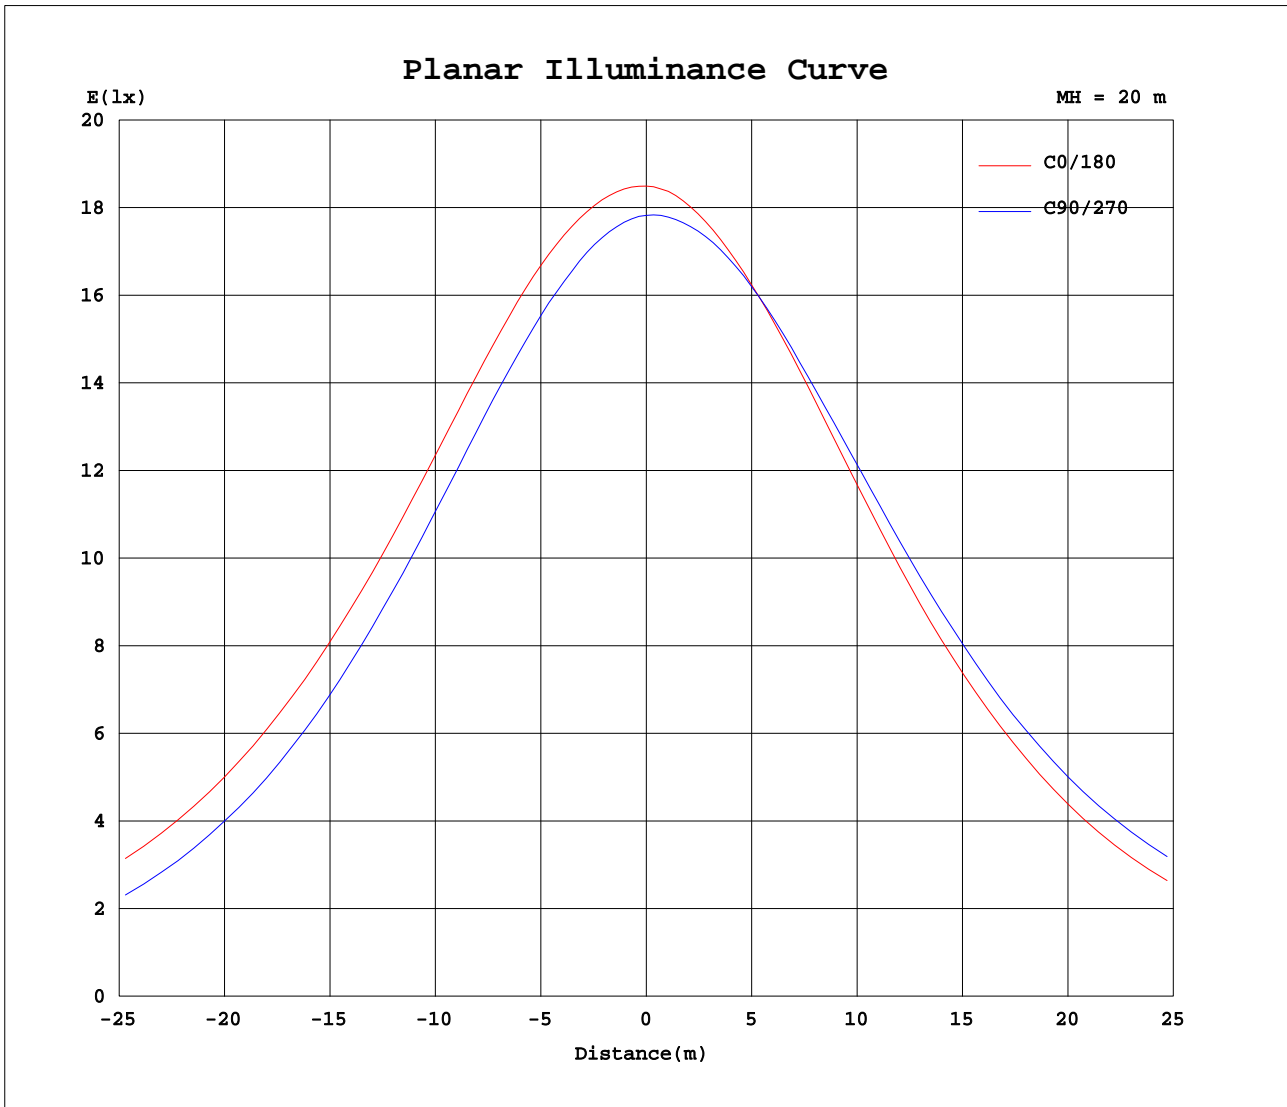

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature: 0DEG  
 Operators:  
 Test Date: 15 January 2019

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.404.6  
 Humidity: 65.0%  
 Test Distance: 7.700m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: TAB0120-200	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: YUANJE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C( DEG) γ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	7166	7166	7166	7166	7166	7166	7166	7166	7166	7166	7166	7166	7166	7166	7166	7166	7166	7166	7166
5	7165	7165	7142	7132	7108	7099	7097	7099	7098	7090	7095	7107	7117	7128	7158	7164	7168	7175	7180
10	7130	7127	7080	7063	7009	6994	6966	6985	6963	6968	6967	6998	7009	7040	7105	7108	7136	7143	7172
15	7067	7037	6963	6942	6864	6852	6805	6817	6777	6797	6789	6844	6864	6904	6988	7005	7065	7074	7120
20	6938	6895	6804	6749	6683	6639	6595	6586	6555	6573	6574	6635	6673	6732	6824	6860	6940	6961	7012
25	6757	6691	6597	6508	6432	6369	6311	6297	6271	6276	6286	6362	6416	6508	6612	6664	6756	6795	6870
30	6527	6444	6324	6221	6123	6058	5976	5954	5905	5922	5932	6028	6108	6219	6348	6410	6525	6570	6681
35	6247	6150	5993	5876	5766	5680	5584	5542	5495	5516	5535	5633	5735	5867	6010	6095	6251	6307	6426
40	5906	5793	5590	5461	5326	5226	5106	5066	5012	5042	5059	5184	5322	5461	5601	5718	5898	5984	6092
45	5489	5371	5126	4976	4802	4697	4549	4505	4441	4481	4501	4647	4809	4967	5147	5280	5489	5580	5699
50	4998	4867	4589	4415	4171	4067	3880	3845	3769	3811	3849	4006	4230	4394	4620	4759	4988	5092	5246
55	4443	4282	3954	3758	3474	3346	3127	3085	3016	3058	3079	3289	3591	3750	3980	4162	4413	4531	4679
60	3810	3616	3253	3021	2722	2588	2374	2312	2247	2296	2306	2540	2895	3031	3292	3472	3760	3873	4055
65	3116	2892	2491	2258	1963	1839	1614	1529	1465	1499	1527	1740	2078	2246	2556	2728	3016	3136	3347
70	2379	2098	1698	1453	1205	1083	941	865	811	830	869	1027	1286	1450	1742	1935	2226	2372	2601
75	1586	1321	1012	808	623	514	397	353	312	321	358	440	600	791	1029	1200	1427	1587	1794
80	858	656	445	313	179	108	44.7	22.0	11.3	12.9	18.7	57.1	124	278	449	609	790	918	1086
85	294	168	63.9	16.2	1.24	1.03	1.07	1.12	1.19	1.18	1.17	1.07	2.27	11.0	69.7	171	306	405	516
90	12.8	1.18	1.00	1.16	1.34	1.53	1.74	1.91	2.02	2.07	2.00	1.82	2.55	2.32	2.18	2.38	17.4	55.2	114

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature: 0DEG  
 Operators:  
 Test Date: 15 January 2019

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.404.6  
 Humidity: 65.0%  
 Test Distance: 7.700m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: TAB0120-200	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: YUANJE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

C( DEG) γ (DEG)	285	300	315	330	345												
0	7166	7166	7166	7166	7166												
5	7187	7182	7195	7187	7181												
10	7167	7185	7204	7187	7165												
15	7111	7149	7160	7148	7113												
20	7025	7054	7077	7054	7012												
25	6875	6918	6919	6910	6853												
30	6676	6722	6719	6712	6645												
35	6426	6493	6470	6464	6386												
40	6122	6176	6171	6156	6066												
45	5744	5818	5800	5772	5673												
50	5293	5373	5353	5324	5215												
55	4759	4868	4837	4809	4672												
60	4141	4257	4230	4185	4034												
65	3429	3564	3523	3494	3317												
70	2665	2784	2768	2734	2578												
75	1871	1982	1999	1955	1815												
80	1171	1234	1237	1192	1077												
85	590	638	630	604	488												
90	159	185	180	149	82.9												

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature: 0DEG  
 Operators:  
 Test Date: 15 January 2019

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.404.6  
 Humidity: 65.0%  
 Test Distance: 7.700m [K=1.0000]  
 Remarks: