

Cable Gland for Armoured Steel Wire



Zone 1	Zone 2	Zone 21	Zone 22	IP65
---------------	---------------	----------------	----------------	-------------

Protection


- Ex db IIC Gb
- Ex eb IIC Db
- Ex tb IIIC Db
- II 2 G Ex db IIC Gb
- II 2 G Ex eb IIC Gb
- II 2 D Ex tb IIIC Db

Standards

IEC 60079-0
IEC 60079-1
IEC 60079-7
IEC 60079-31
EN 60079-0
EN 60079-1
EN 60079-7
EN 60079-31

Technical Data

Operating Temperature	-40°C ~ + 95°C
Degree of Protection	IP65
Material	Stainless Steel Silicone
Entrance Thread	NPT 3/4" NPT 1/2"

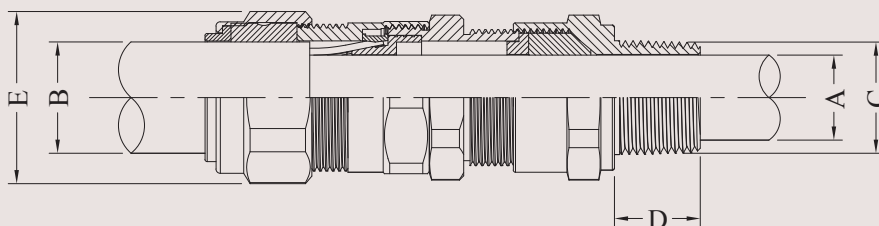

Part Number	Entry Thread Size "C"	Cable Acceptance Inner Sheath "A"		Cable Acceptance Outer Sheath "B"		Armour Range		Thread Length "D"	Across Corners "E"
		Max	Min	Max	Min	Max	Min		
THT-2AN012UX150400	NPT1/2"	14.0mm	6.5mm	20.9mm	12.5mm	1.25mm	0.9mm	18.95mm	34.0mm
THT-2AN034UX150801	NPT3/4"	20.0mm	11.1mm	26.2mm	18.2mm	1.6mm	1.25mm	20.15mm	40.5mm