

Magnetically Coupled Strainer

MCS 500™

High flow strainer

Mechanically
Cleaned

Permanent
Media

MCS 500 strainer's magnetically coupled actuation eliminates the need for dynamic seals. This technology provides quick and easy access for maintenance, reduces potential leaks and requires few moving parts while providing a long service life.



Environmentally sustainable design

Features

- No dynamic seals
- Minimal purge for low waste operation
- Easy in-line installation
- Continuous 24/7 operation
- Maintenance-friendly design means lower labor costs
- Eco-friendly
- 316 stainless steel housing

Options

- Multi-station configuration
- EPT/EPDM (Nordel™) or Viton® seal material
- Advanced programmable microprocessors
- Construction according to "AD 2000-Merkblätter", DIN EN 13445 or ASME Code
- Automatic pressure transmitters
- Purge welding
- Air bleed capability
- 304 stainless steel controller enclosure
- Gauge ports: 1/4"

The MCS Series™ is engineered to conserve valuable process water while protecting costly equipment from debris. It offers minimal purge volumes in fresh water applications—allowing you to save on the cost of make up liquids, chemical treatment and heating energy.

Featuring fast cleaning magnetically coupled actuation, this design offers an optimized configuration to help improve and reduce costly maintenance and downtime. In addition, this actuation method eliminates the need for cover thru-holes and their associated seals.


Typical applications

- paper coatings • pcc/gcc slurries • phenolic resins • petroleum based greases • ethanol processing
- cip fluids (sodium hydroxide) • hot fry oils • starch • lime slurries • curtain coaters • nutricosmetics
- machining coolants • adhesives • paints • inks • chocolate • edible oils • detergents • tallow

Nordel™ is a registered trademark of The Dow Chemical Company ("Dow") or an affiliated company.
Viton® is a registered trademark of E. I. du Pont de Nemours and company.



Powering Business Worldwide



The actuation piston and cleaning disc are coupled by powerful rare earth magnets—a simple design that delivers tremendous benefits by eliminating the need for shaft or external drive seals.


MCS 500 Magnetically Coupled Strainer

MCS 500 high flow strainer specifications

Approx. weight	350 lb (159 kg)
Service height	66 in (1,676 mm)
Flow rates at 100 µm	Up to 500 gpm (114 m³/h)
Operating pressure	30 - 150 psi (2 - 10.5 bar)
Operating temperature, max.	180 °F (82 °C)
Viscosity	Water/water-like fluids
Standard retention*	150 - 1,100 microns
Housing material	316 stainless steel
Elastomers	EPT/EPDM (Nordel) or Viton
Process connections	6 in 150# flanged/DN 200 flanged
Purge connection	1 ½ in NPT/1 ½ in BSPT
Air for actuator drive (clean, dry, non lubricated air)	80 psi (5.5 bar) min. - 116 psi (8 bar) max. 5.0 cfm (141.5 l/min)
Electrical for controllers	115 VAC or 230 VAC 50/60 Hz
Semi-auto voltage	24 VAC, 115 VAC, 230 VAC 24 VDC 115/230 VAC

*Tighter retentions available. Please contact Eaton for more information.

MCS 500 flow rates

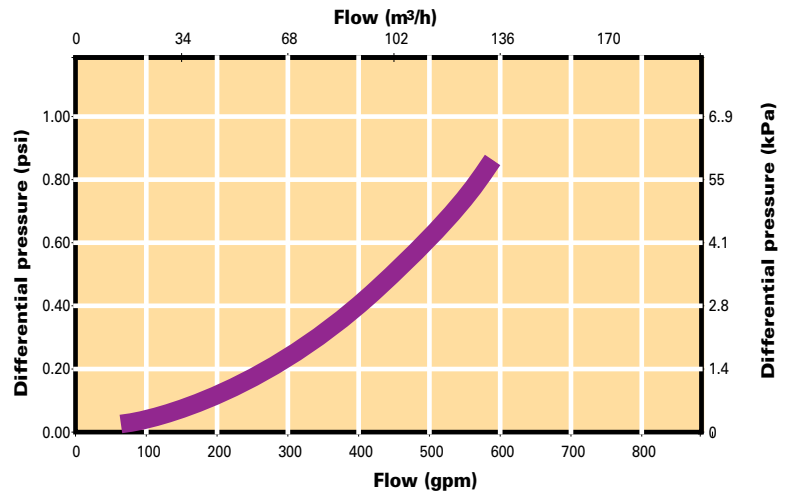


Up to eight MCS units can be configured into a multi-plex system for high volume requirements.

Slotted wedge wire strainer element options

Inch	Micron	Mesh	% Open area
.002	50	325	6
.003	75	200	9
.004	100	150	12
.006	150	100	17
.007	180	80	19
.008	200	70	21
.009	230	60	23
.015	380	40	33
.024	600	30	44
.030	700	20	50
.045	1140	15	60



Additional retentions available, consult Eaton.

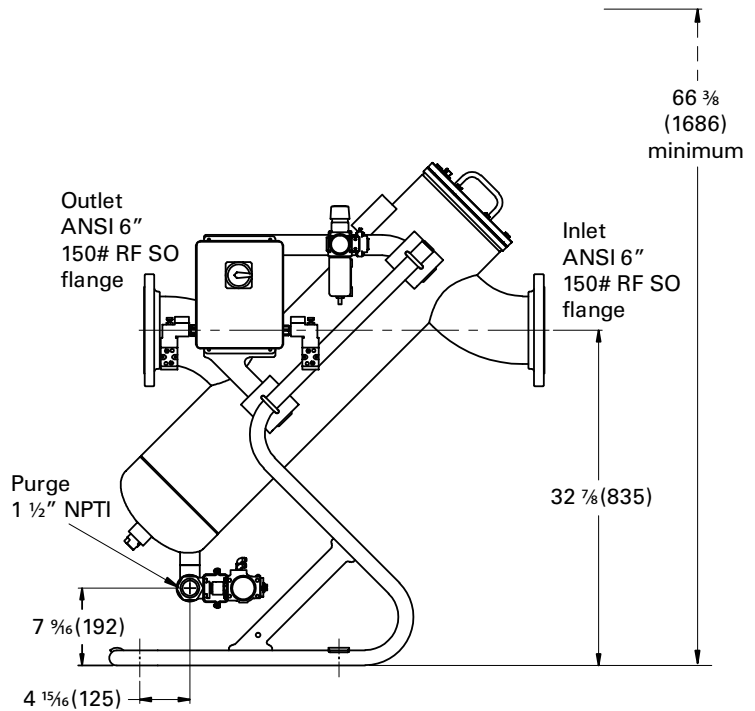

North America
 44 Apple Street
 Tinton Falls, NJ 07724
 Toll Free: 800 656-3344
 (North America only)
 Tel: +1 732 212-4700

Europe/Africa/Middle East
 Auf der Heide 2
 53947 Nettersheim, Germany
 Tel: +49 2486 809-0

Internormen Product Line
 Friedensstraße 41
 68804 Altludersheim, Germany
 Tel: +49 6205 2094-0

Begerow Product Line
 An den Nahewiesen 24
 55450 Langenlonsheim, Germany
 Tel: +49 6704 204-0

China
 No. 3, Lane 280,
 Linhong Road
 Changning District, 200335
 Shanghai, P.R. China
 Tel: +86 21 5200-0099

Singapore
 4 Loyang Lane #04-01/02
 Singapore 508914
 Tel: +65 6825-1668

Brazil
 Av. Julia Gaioli, 474 - Bonsucesso
 07251-500 - Guarulhos, Brazil
 Tel: +55 11 2465-8822

**For more information, please
 email us at filtration@eaton.com
 or visit www.eaton.com/filtration**

© 2014 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

US
 EF-SSEA-31
 6-2014



Powering Business Worldwide