



Cost-effective filter bags for demanding applications

Eaton's ABP filter bags are suitable for a wide range of applications such as beverage filtration, fine particle removal in parts cleaning, activated carbon removal in process systems, the final filtration of vinegar, lacquers, hydraulic oils and lubricants and many more.

With efficiencies greater than 99%, each ABP filter bag model provides cost-effective filtration solutions for demanding applications. The four models ensure that users can efficiently remove particles ranging from 1 – 25 µm while delivering a long service life.

Features and benefits

- ABP polypropylene filter bags are fabricated from hydrophobic microfiber filter material, which require pre-wetting with an aqueous solution (full details about wetting and installation are provided with every box of ABP filter bags)
- Highly efficient melt-blown filter material in polypropylene with graded density profiles to maximize dirt-holding capacity and prolong service life
- No additives such as resins, binders or surface treatments
- Spunbond polypropylene cover layer virtually eliminates fiber migration

- Unique UNI-WELD process for bottom seam provides a stronger, more flexible weld seal
- Fully-welded construction with patented SENTINEL® seal ring provides 100% bypass-free filtration
- The pressure-activated SENTINEL seal ring provides a flexible, chemically resistant seal which adapts to any bag filter housing

Filter specifications

Material

Melt-blown polypropylene

Cover layer

Spunbond polypropylene

Seal ring

Welded polypropylene SENTINEL seal ring

Retention ratings¹

1, 5, 10, 25 µm
@ > 99% efficiency

Dimensions/Parameters

Sizes

03: Ø 4 x 9" L (100 x 230 mm)
04: Ø 4 x 15" L (100 x 380 mm)

Filter area

03: 0.9 ft² (0.08 m²)
04: 1.7 ft² (0.16 m²)

Max. operating temperature

Polypropylene: 194 °F (90 °C)

Max. differential pressure

36 psi (2.5 bar)

Recommended change-out pressure for disposal²

11.6 – 21.7 psi (0.8 – 1.5 bar)

Max. flow rates³

03: 13 GPM (3 m³/h)
04: 22 GPM (5 m³/h)

FDA/EC conformity


All polypropylene materials used in manufacturing comply with the regulations of the Food and Drug Administration (FDA), title 21 of the Code of Federal Regulations Section 177, and EC Regulations 1935/2004 and EC Directive 2002/72/EC, as applicable for food and beverage contact.

EATON

Powering Business Worldwide

ABP Filter Bag Range

Flow rates

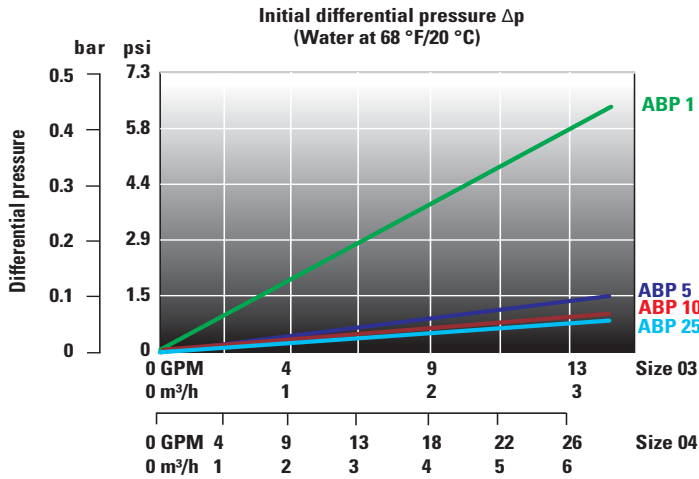

Filter removal efficiency


Retention ratings ¹ (μm)	Particle sizes (μm) at common removal efficiencies (%)				Max. operating temperatures °F (°C)
	> 60%	> 90%	> 95%	> 99%	
1	-	1	2	4	194 (90)
5	1	2	4	5	194 (90)
10	2	5	10	30	194 (90)
25	10	30	40	-	194 (90)

¹ Reference values based on single pass tests in ambient lab conditions with ISO test dust in water at 44 GPM (10 m³/h)/size 02.

² Dependent on the respective applications and their requirements.

³ For liquids with a dynamic viscosity of 1 mPa·s @ 68 °F (20 °C).

Ordering information

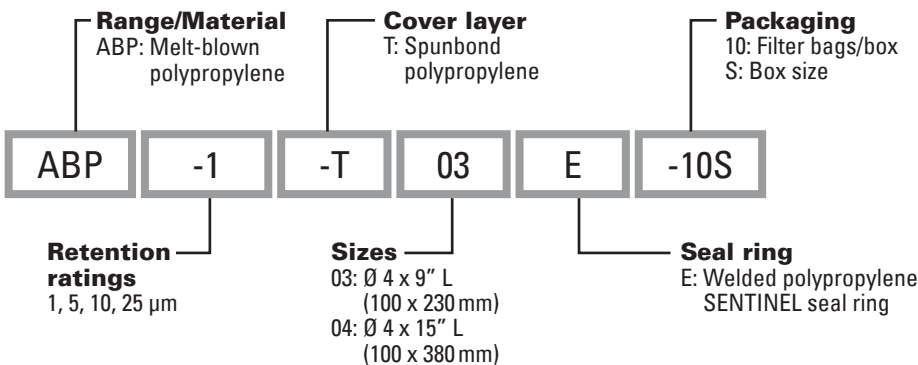

North America
44 Apple Street
Tinton Falls, NJ 07724
Toll Free: 800 656-3344
(North America only)
Tel: +1 732 212-4700

Europe/Africa/Middle East
Auf der Heide 2
53947 Nettersheim, Germany
Tel: +49 2486 809-0

Internormen Product Line
Friedensstraße 41
68804 Altlußheim, Germany
Tel: +49 6205 2094-0

Begerow Product Line
An den Nahewiesen 24
55450 Langenlonsheim, Germany
Tel: +49 6704 204-0

China
No. 3, Lane 280,
Linhong Road
Changning District, 200335
Shanghai, P.R. China
Tel: +86 21 5200-0099

Singapore
4 Loyang Lane #04-01/02
Singapore 508914
Tel: +65 6825-1668

Brazil
Av. Julia Gaioli, 474 – Bonsucesso
07251-500 – Guarulhos, Brazil
Tel: +55 11 2465-8822

For more information, please
email us at filtration@eaton.com
or visit www.eaton.com/filtration

© 2014 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

US
EF-FTB-17
08-2014