

Machine Control Detector LT-360

SPECIFICATION

Accuracy-Precise	±2mm to ±10mm
Accuracy-Coarse	±5mm to ±23mm
Operation Range	200m
Power Supply	7.2V NiMh/2500mAh rechargeable Batteries
Continuous Operating Time	40h
Charging Time	15h
Height of Receiving Window	250mm
Working Temperature	-20°C~50°C
Storage Temperature	-30°C~70°C
Size	376x180x49/mm3
N.Weight	3.1KG

FEATURES

- *360° Reception
- *Large Detection Area
- *Either metal clamp or magnet clamp is available for this unit.
- *The detector was built construction tough with an aluminium housing and shock mounted electronics
- *Bright LED display for easy visibility in all light conditions
- *The detector was designed to adapt to any earthmoving machine, so you need only one receiver for any job.
- *Two Accuracy settings allow you to work from rough grading to final finishing.



Completed kit



Packaging




Metal Clamp



Magnetic Clamp



Clip Clamp

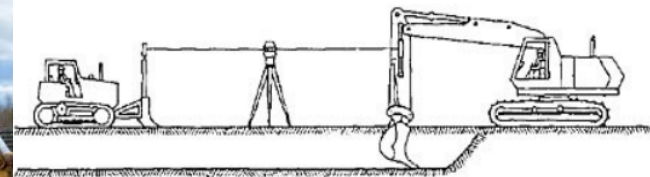

Applications