

PRODUCT FEATURES

- Ultra-thin, ultra-modern architectural style
- Edge-lit light guide technology
- Fully dimmable integrated LED lamp
- Available in two sleek finish options, Chrome or Satin Nickel
- Ideal for bathroom and vanity lighting
- Protected by a 5-year warranty



LAMPING

Includes 26 watt, 1215 delivered lumens, 3000K LED module. Dimmable with low-voltage electronic dimmer. Mounts horizontally or vertically. Direct or Direct/Indirect (50/50) light distribution options.

Chrome



Chrome

Satin Nickel

ORDERING INFORMATION

700BC	SHAPE OR SIZE	LENGTH (A)	FINISH	LAMP
	A DIRECT	2 24"	C CHROME	-LED830 LED 80 CRI 3000K 120V
	B DIRECT/INDIRECT	3 36"	S SATIN NICKEL	-LED930 LED 90 CRI 3000K 120V
				-LED930-277 LED 90 CRI 3000K 277V

700BC _____

JOB NAME _____


NOTES _____



SPAN 24 BATH

SPECIFICATIONS

HARDWARE MATERIAL	Metal
SHADE MATERIAL	Acrylic
NET WEIGHT	2.93 lbs
HEIGHT	5.5in
WIDTH	5.5in
LENGTH	24.6in
WET LISTED	
DAMP LISTED	
DRY LISTED	
SLOPED CEILING ADAPTABLE?	No
GENERAL LISTING	ETL Listed
INCLUDES	

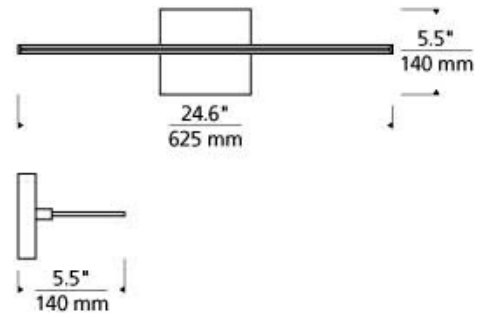

LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS	1215			
WATTS	25 20	26		
MAX WATTAGE PER BULB	25W	26W		
INPUT VOLTAGE	120V	120V 277V		
DIMMING TYPE*		ELV		
CCT	3000K	3000K		
CRI	80 CRI	90 CRI		
LED LIFETIME				
L70				
AVERAGE BULB HOURS		25000		
FIELD SERVICEABLE LED				
LAMP BASE				
LAMP SHAPE				
LAMP INCLUDED?	Y	Y		
WARRANTY**		5 Years		

* Dimming information available at www.techlighting.com/Downloads#dimming

** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6.			
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.			

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

