



1509 S. La Cienega Blvd.  
Los Angeles, CA 90035  
T: 310. 826. 7777  
info@liteninc.com

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Rubix

### Single & Double Wall Mount 3000K

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
WS-W2504	3000K 90	16W	750	AL Brushed Aluminum
WS-W2505	3000K 90	30W	1400	BK Black
				BZ Bronze
				GH Graphite
				WT White

Example: **WS-W2504-AL**

#### DESCRIPTION

Available in single and twin light configurations, this die-cast aluminum LED wall luminaire is Wet Location listed for a broad range of exterior lighting applications. Designed with a square profile, this version of Rubix mounts upwards or downwards.

#### FEATURES


- Driver concealed within the fixture
- 5 year warranty

#### SPECIFICATIONS


Construction:	Die-cast Aluminum
Power:	30W, 16W
Input:	120-277 VAC, 50/60Hz
Dimming:	ELV: 100-15%, 0-10V: 100-10%
Light Source:	Integrated LED
Rated Life:	70000 Hours
Mounting:	Mounts directly to junction box, Can be mounted on wall in all orientations
Finish:	Electrostatically Powder Coated White, Bronze, Black, Brushed Aluminum, Graphite
Operating Temp:	-40°F to 122°F (-40°C to 50°C)
Standards:	ETL, cETL, Wet Location Listed, IP65, Title 24 JA8-2016 Compliant



#### FINISHES

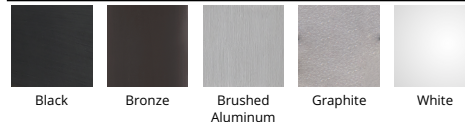

#### LINE DRAWING

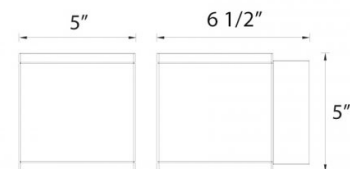

WS-W2504, WS-W2505