


GRAND ACCENT 12V

5211

LANDSCAPE LIGHTING

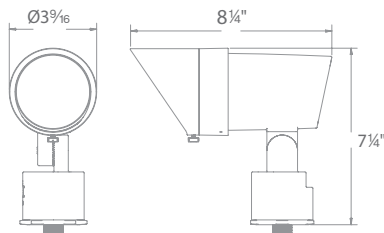

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Landscape accent luminaire. One fixture replaces all older halogen landscape accent lights

FEATURES

- Adjustable and lockable beam angle
- Integral dimmer
- IP66 rated, Protected against high-pressure water jets
- Includes a detachable shroud
- Solid diecast brass or corrosion resistant aluminum
- Factory sealed water tight fixtures
- Mounting stake, 6' lead wire and direct burial gel filled wire nuts included
- Maintains constant lumen output against voltage drop
- UL 1838 Listed
- Not suitable to use with external dimmers

SPECIFICATIONS

Input: 9 - 15VAC (Transformer is required)
Power: 15W to 35W / 21VA - 44VA
Brightness: 740 lm to 2000 lm
Beam Angle: 15° to 60°
CRI: 85
Rated Life: 45,000 hours

ORDERING NUMBER

		Color Temp	Finish
5211	Grand Accent 12V	27 2700K	BK Black on Aluminum BZ Bronze on Aluminum
		30 3000K	
		40 4000K	

5211-_____

Example: 5211-40BK



1509 S. La Cienega Blvd.
Los Angeles, CA 90035
T: 310. 826. 7777
info@liteninc.com

GRAND ACCENT 12V

5211

LANDSCAPE LIGHTING

Accessories

Accent Snoot		5211-SNOOT-BK 5211-SNOOT-BZ	Black on Aluminum Bronze on Aluminum	Shields lamp and reduces glare		
6" Long Shroud		5211-LSHR-BK 5211-LSHR-BZ	Black on Aluminum Bronze on Aluminum	Reduce glare. Ideal for downlighting application		
Additional Stake		9000-ST9-BZ	Bronze	Durable PVC stake		
Surface Mount Flange/Stake		5000-SCP-BZ 5000-SCP-BBR 5000-SCP-BK	Bronze on Aluminum Bronze on Brass Black on Aluminum	Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box		
Guardian Mount		9000-SP9-BZ	Stainless Steel	Heavy duty stainless steel spike to position fixture Formed from a single piece of metal		
Gutter Mount Bracket		5000-GM-BZ 5000-GM-BK	Stainless Steel	Stainless Steel universal mounting bracket for gutter mounting fixture		
Tree Mount Junction Box		5000-TCP-BZ 5000-TCP-BK	Bronze on Aluminum Black on Aluminum	Bronze on Aluminum box with Stainless steel mounting screws. Two ½" NPT threaded holes		
Optics		LENS-25-AMB LENS-25-GRN LENS-25-RED	Amber Green Red	LENS-25-BLU LENS-25-FR	Blue Frosted	Enhances saturation of florals and foliage
Extension Rods		5000-X04-BZ 5000-X04-BK 5000-X08-BZ 5000-X08-BK 5000-X12-BZ 5000-X12-BK	4 in 4 in 8 in 8 in 12 in 12 in	5000-X18-BZ 5000-X18-BK 5000-X24-BZ 5000-X24-BK	18 in 18 in 24 in 24 in	Extends distance between Accent light and Surface Mount Canopy, Stake, or Tree Mount box
Rod L-Coupler		5000-LCO-BZ	Bronze			

Magnetic Transformers

Stainless Steel, 12-15V output, IP65 rated, UL 1838 listed
See transformer spec sheet for details and its accessories

9075-TRN-SS
75W Max

9150-TRN-SS
150W Max

9300-TRN-SS
300W Max

9600-TRN-SS
600W Max



1509 S. La Cienega Blvd.
Los Angeles, CA 90035
T: 310. 826. 7777
info@liteninc.com