


SYMMETRICAL RECESSED CHANNEL

LED-T-RCH1



1509 S. La Cienega Blvd.
Los Angeles, CA 90035
T: 310. 826. 7777
info@liteninc.com

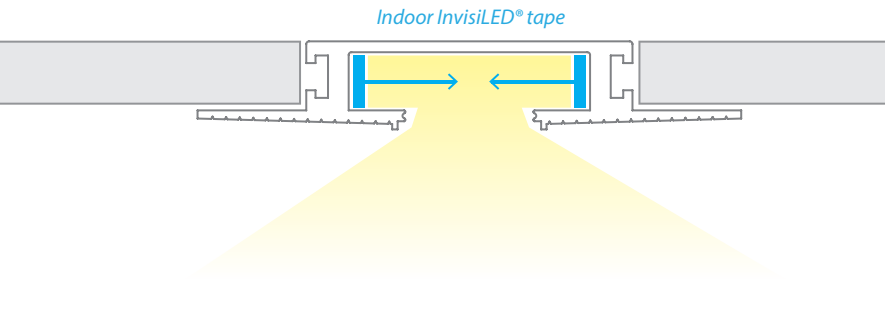

Fixture Type:

Catalog Number:


Project: _____

Location: _____

COMPATIBLE PRODUCTS

- InvisiLED® Pro, Pro2, Pro3
- InvisiLED® LITE, Classic
- InvisiLED® Daylight to Sunset, Palette


- Installs within drywall depth
- Linear channel can be field cut
- Accomodates either one or two runs of InvisiLED® indoor tape
See individual InvisiLED spec sheets.
- Includes a translucent white acrylic diffuser
- Dense foam insert for spackling
- Aluminum extrusion powder coated in matte white
- Remote transformer is required

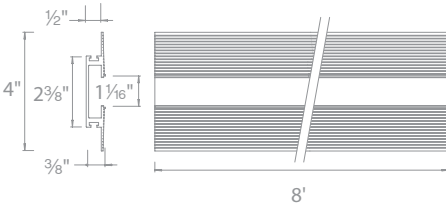

8 ft linear channel

LED-T-RCH1-WT



*Includes an end cap and diffuser
Can be field cut*



Power feed

LED-T-RBOX1-WT

*Includes a wiring box, two hanger bars,
two five-pin InvisiLED® adapters, an end cap and diffuser
The end cap may be placed on either side or be removed
Hanger bars may install on any side of the wiring box*

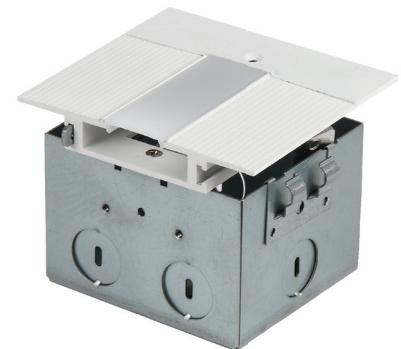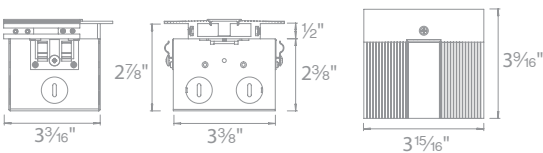

LED-T-____-WT


Example: **LED-T-RCH1-WT**

SYMMETRICAL RECESSED CHANNEL

LED-T


Lateral corner
Includes diffuser

LED-T-CTC1-WT

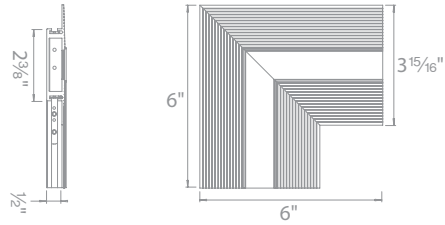


Perpendicular corner
Transitions between walls or wall to ceiling
Includes diffuser

LED-T-WTC1-WT

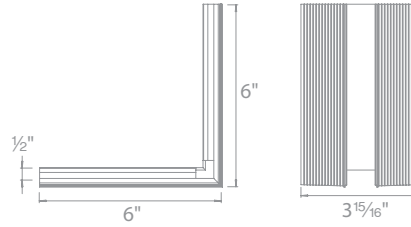

Outside corner
Transitions around columns, bump outs, or soffits
Includes diffuser

LED-T-WTW1-WT

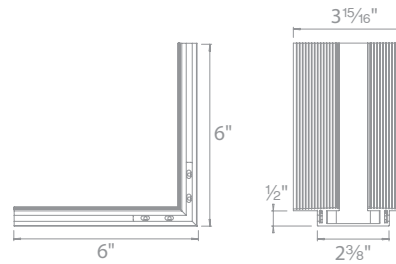

LED-T-____-WT

Example: **LED-T-WTW1-WT**

PERFORMANCE CHART

	InvisiLED® Pro3	InvisiLED® Pro2	InvisiLED® Pro	InvisiLED® LITE
2200K	120			
2700K	215	180	110	85
3000K	220	165	110	100
3500K	245	185	115	
4500K	265	185	120	

Two strips of tapes were used under the diffuser, data shows lumen output per foot