

EW71412

Specification Sheet

Exterior WallSconce


PROJECT					
DATE				TYPE	
Voltage	Watt	LED Lumens	Delivered Lumens	Finish(es)	
120V	22.5W*	1600lm	369lm	GY - Grey	Color Temp 3000K
120V	22.5W*	1600lm	286lm	BK - Black	CRI (Ra) >90
					Dimming 100% - 10%
					Rated Life 50,000 hours

*Preliminary figures



GY - Grey

Other Finishes:



BK - Black

Product Descriptions

This family of exterior wall-mounted fixtures is available in a variety of geometric forms: circle, square, and two different rectilinear configurations. Light is directed downward from a recess, and the incline allows the glow to radiate gradually. Vanishingly thin and ideal for egress, courtesy, and grace lighting. Optional stone inlays offer additional opportunities for customizing to complement different wall surfaces.

Product Details

High system efficacy
Low total life cycle cost
No visible flicker AC operation
ETL Listed
5-year LED and fixture warranty.


Utilizes our patented Driverless LED Light Engine technology - connects directly to AC, no external driver needed.

Available with black or grey finishes. Powder coated die cast aluminum with a polymeric diffuser.

Dimmable with ELV dimmer (not included)

Line Voltage.

Custom options available

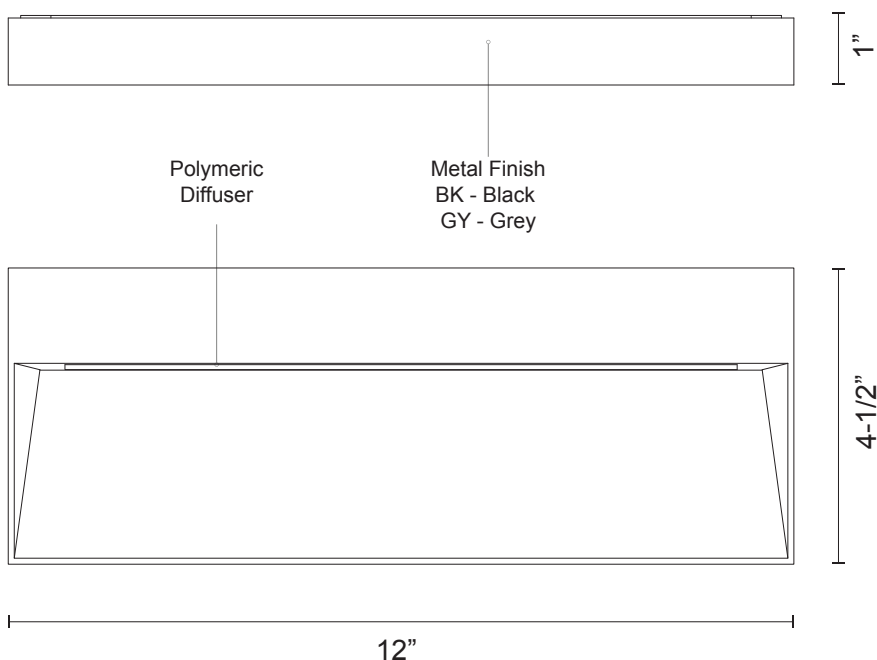

Comments:

Canopy dimensions:
L: 12" H: 4-1/2"



1509 S. La Cienega Blvd.
Los Angeles, CA 90035
T: 310. 826. 7777
info@liteninc.com

