


FLOOD/FLOOD PRO Endurance Wallpack

WP-LED335/WP-LED354



Includes two canopy accessories for surface mount
Or recessed junction boxes




Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

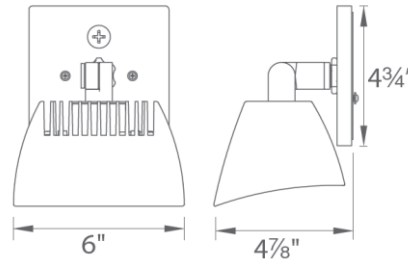

PRODUCT DESCRIPTION

Die cast aluminum factory sealed housings with patent pending design for a water and dust proof IP66 rated outdoor luminaire

FEATURES

- Factory-Sealed LED Light Engine
- 360° Horizontal Rotation, 90° Vertical Aiming
- Photo/Motion Sensor Compatible (Sold Separately)
- Suitable to install in all directions
- 120V Direct Wire - No Driver Needed
- Smooth and Continuous ELV Dimming
- 90 CRI
- 54,000 hour rated life

SPECIFICATIONS

Construction: Die-cast aluminum

Power: Line Voltage input (120V)


Dimming: 100% - 10% with Electronic Low Voltage (ELV) dimmer

Finish: Architectural Bronze, White and Graphite

Standards: IP66, Wet Location, ETL & cETL Listed

Operating Temperature: -40°C (-40°F) to 40°C (104°F)

PHOTOMETRY

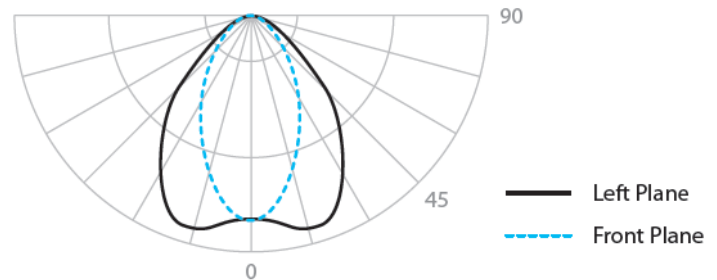

ORDER NUMBER

Model		Wattage	Comparable	Color temp	Delivered Lumens	Finish
WP-LED335	<i>Flood</i>	35.5W	100W HID	30	3000K	2450
				50	5000K	
WP-LED354	<i>Flood Pro</i>	53W	150W HID	35	3500K	3445

aBK Architectural Black

aBZ Architectural Bronze

aGH Architectural graphite

aWT Architectural White

Example: **WP-LED354-35-aWT**



1509 S. La Cienega Blvd.
Los Angeles, CA 90035
T: 310. 826. 7777
info@liteninc.com


FLOOD/FLOOD PRO Endurance Wallpack

WP-LED335/WP-LED354

MOTION SENSOR (120V) available in 3 complementary colors




MS-120-BZ Bronze
MS-120-GY Gray
MS-120-WT White



PHOTOSENSOR (120V) available in 3 complementary colors



PC-120-BZ Bronze
PC-120-GY Gray
PC-120-WT White



1509 S. La Cienega Blvd.
Los Angeles, CA 90035
T: 310. 826. 7777
info@liteninc.com