


MPT8 A4 Mobile Thermal Transfer Printer

- Thermal transfer printing technology, able to print on normal A4 copy paper with permanent effect
- Default 203 dpi, 300 dpi(optional)
- Easy paper loading and ribbon replacement
- Bluetooth 2.0, USB, Bluetooth 4.0 optional
- High battery capacity of 7.4V 2800mAh
- Low power consumption featuring sleep mode
- Auto paper feed
- Die casting aluminum body
- Windows driver
- Android SDK

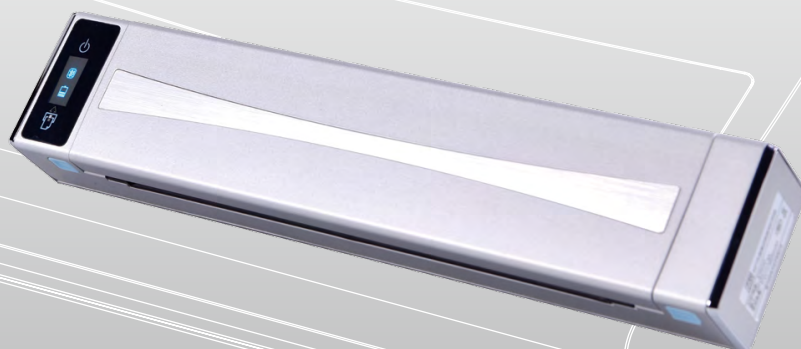

Specification


Item		Parameter	
		MPT8	MPT8E
Printing	Print Method	Thermal-transfer (Standard)/Direct thermal (Optional)	
	Resolution	203dpi (8dots/mm)	300dpi (12dots/mm)
	Print Speed	Max. 20mm/s	
	Printing Width	198mm	
	Interface	USB, Bluetooth	
Power Saving	Sleep Mode	Yes	
Memory	RAM	8Mb	
	Flash	16Mb	
Resident Fonts	Chinese	GBK 24×24dots	GBK 36×36dots
	Alphanumeric	ASCII 12×24dots	36 dot matrix of non-monospace font
	User-defined	YES	
	Code Page	46	
Graphics		Support bitmap printing with different density and user defined bitmap printing. (Max size of each bitmap is 40K, the total size of bitmap is 128k.)	
Barcode	1D	UPC-A,UPC-E,EAN8,EAN13,CODE39,ITF,CODEBAR,CODE128,CODE93	
Detection	Sensors	Paper out detection, cover open detection, paper feed positioning detection, ribbon detection	



OLED



Ribbon



Auto Paper Feed

Power Supply	Power Adapter	12V/1.5A (External power adapter)
	Battery	2800mAh 7.4V rechargeable Li-ion battery
Paper	Paper Type	A4 copy paper, thermal fax paper(Optional)
	Paper Width	210mm
	Paper Thickness	0.06~0.09mm
	Paper Load	Automatic feed (A4 paper)
Ribbons		Max. Diameter ≤φ14mm
Environment	Operation	0°C~40°C, 20%~85%RH
	Storage	-20°C~60°C, 5%~95%RH
Physical Characteristics	Dimension	310.5(L)×63(W)×38.5(H)mm
	Weight	797.5G(Include ribbon)
Options & Accessories		USB Cable, Ribbon, Power Adapter, Power Cord, Quick Start Guide, CD
Software	Emulation	ESC/POS
	Driver	Windows
	SDK	WinCE, Win Mobile, Android



Bluetooth



Travel



Logistic



Medical



Retail



Payment



Windows



Android