

Airkomp

Electro-pneumatic press with manual load. Its crossed surfaces of pressing allow you a quick assembly of furniture without prior adjustment. Fast working way, with limited stroke and pressure can also press 45° jointing system cabinets.



Platform and column are constructed with intercrossed steel pipes and covered with anti-friction strips for best sliding in pressing operation.

High clamping forces controlled by developed strength controled by pneumatical limiters.



press adjustment.

Pneumatic controls will enable you easily to select the pressing strength.



Grinding spindle and linear guideways, ensure proper stability and high performance.






AIRKOMP Technical CHARACTERISTICS

PRESS SPECIFICATIONS	
Max. / min. cabinet length	2.470 / 330 mm
Max. / min cabinet height	1.380 / 300 mm
Maximum cabinet width	700 / 200 mm
PRESS STRENGTH	
Max. lateral strength	1.200 kg
Max. vertical strength	2.000 kg
PRESS ELEMENTS	
Vertical platform with 6 intercrossed steel pieces	150x50 mm
Lateral column with 5 intercrossed steel pieces	150x50 mm
Standard working height (H1)	420 mm
ELECTRICAL SUPPLY	
Voltage / Frequency	400 v. / 50 hz
Electric power	0,75 kw
PNEUMATICAL SUPPLY	
Air pressure	6 bar
Air consumption	25 NI/ cycle
EXTERNAL DIMENSIONS / WEIGHT	
Length x height x width (LxHxW)	3.660 x 2.270 x 900mm
Weight	1.600 kg





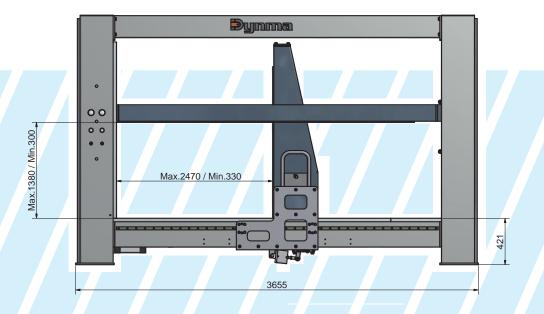



Copyright 2019. Desarrollo Industrial de Maquinaria Benicarló S.L.

The information contained in this document is subjected to change and it is not binding.

DYNMA ia a registered trademark by Desarrollo Industrial de Maquinaria Benicarló S.L.



CV-135, km 20.1 Pol. Ind. Mercat de Abastos, C/."P"10 12580 **Benicarló** (Castellón) España

Phone:: +34 964 470 156

dpto.comercial@dynma.es www.dynma.es

Distributed by: