



by Schneider Electric

# Basic Rack PDU


## Overview

The American Power Conversion (APC™) Basic Rack Power Distribution Unit (PDU) distributes power to devices in the rack.

**Outlets.** The Rack PDU has thirty-six (36) IEC-309-C13 outlets and six (6) IEC-309-C19 outlets.

**Power cord.** The 0.91-m (3-ft) power cord terminates with an IEC-309 16 A connector.

## AP7557

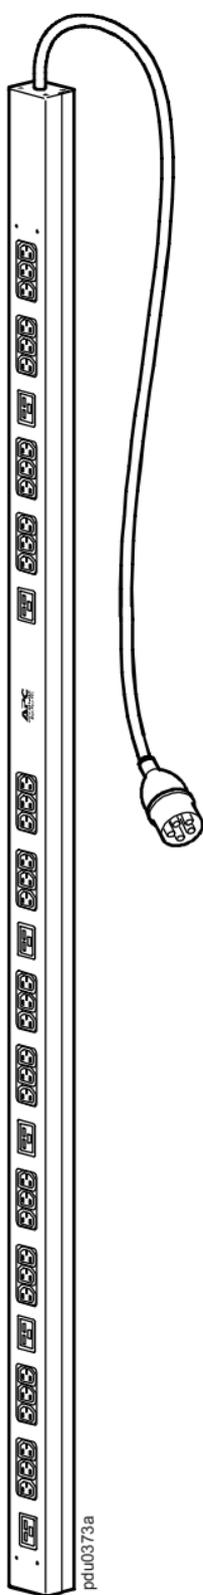

# Specifications

## Electrical

Input connector	IEC-309, 16 A
Nominal output voltage	220–240 VAC
Output connectors	(36) IEC-309-C13 (6) IEC-309-C19
Cord length	0.91 m (3.00 ft)
Max output current (outlet)	10 A–IEC-309-C13 16 A–IEC-309-C19
Max output current (phase)	16 A
Max input current (phase)	16 A
Nominal input voltage	230/400 VAC, 3-phase
Acceptable input voltage	±10% of normal voltage
Input frequency	50/60 Hz

## Physical

Dimensions (H x W x D)	177.80 x 5.56 x 4.39 cm (70.00 x 2.19 x 1.73 in)
Shipping dimensions (H x W x D)	213.36 x 15.24 x 12.7 cm (84.00 x 6.00 x 5.00 in)
Weight	5.4 kg (12 lb)
Shipping weight	8.8 kg (19.5 lb)

## Environmental

Maximum elevation (above MSL)	
Operating	3000 m (10,000 ft)
Storage	15 000 m (50,000 ft)
Temperature	
Operating	–5 to 45°C (23 to 115°F)
Storage	–25 to 65°C (–13 to 149°F)
Humidity	
Operating	5–95% RH, non-condensing
Storage	5–95% RH, non-condensing

## Compliance

Safety verification	VDE, CE Mark, Queensland, CCC, GOST
---------------------	--

Customer support and warranty information is available at the APC Web site, [www.apc.com](http://www.apc.com).

© 2011 APC by Schneider Electric. All trademarks are owned by Schneider Electric Industries S.A.S., American Power Conversion Corporation, or their affiliated companies.