4.0.
CARATTERISTICHE TECNICHE E DISPOSITIVI DI SICUREZZA

4.0.
TECHNICAL FEATURES AND SAFETY DEVICES

TAV. 4

FIG. 4

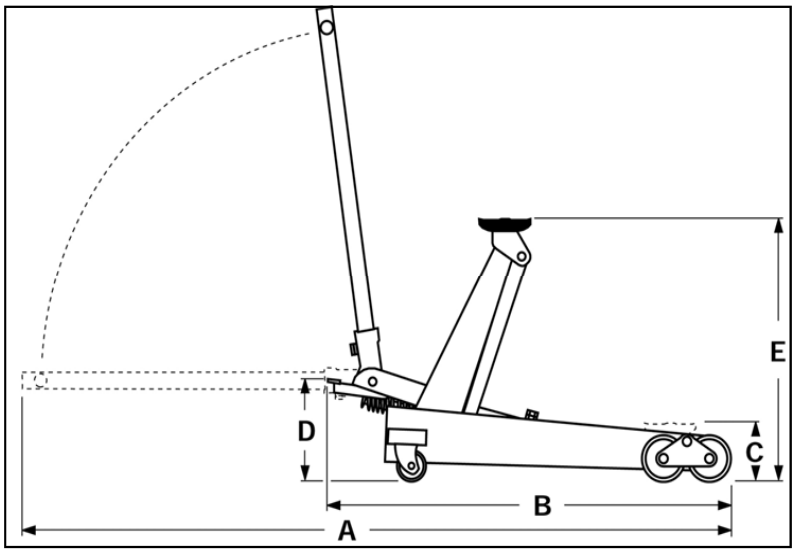


Tabella 1

Table 1

Modello Model	Capacità di carico Capacity [kg]	Larghezza massima Maximum width [mm]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	Peso Weight [kg]
Art. 1120/E	2000	530	1800	1030	130	200	760	65

Funzionamento mediante azionamento manuale della pompa.
Dispositivo di finecorsa al termine del movimento di salita.
Valvola di ritegno che consente la stabilità della posizione del carico sollevato e impedisce movimenti indesiderati.
Dispositivo di discesa a “uomo presente”.
Valvola di massima pressione che agisce sulla pompa e impedisce il sollevamento di carichi superiore ai limiti di capacità consentiti dal costruttore.
Controllo velocità discesa per mantenere costante la velocità di discesa entro i limiti stabiliti dalla normativa vigente, indipendentemente dal carico.
Ruote basculanti posizionate nella parte anteriore dell’apparecchio.

Operation by manual start of the pump.

Limit stop device at the end of the travel of the stem.
Nonreturn valve, which allows the lifting position stability and prevents the load from moving uncorrectly.
“Man standing-by” descent control.
Maximum pressure valve that acts on the pump and controls that the load support is not above the load limits permitted by the manufacturer.
Descent speed control device keeps descent speed within legal rules limit, whatever could be the lifted weight.

Frontal balancing rolls.