




8692

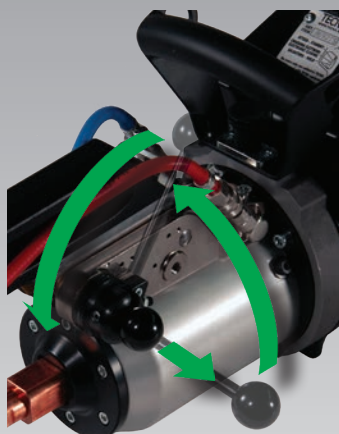

FORCE
615
daN

MAX STROKE
92
mm

GYRO
360°
SCOPE

Smart
PLUS

DATI TECNICI TECHNICAL FEATURES DATOS TÉCNICOS

	3680S 8692	3680S 8692
Tensione d'alimentazione Supply voltage - Fuente de alimentación	*400 VACx3~50 Hz	*220 VACx3~50/60 Hz
Fusibili di rete Mains fuses - Fusibles de red	32 A - ritardato delayed - retardado	50 A - ritardato delayed - retardado
Corrente continua di saldatura Welding current - Corriente de soldadura continua	15.500 A	
Serbatoio dell'acqua - contenuto Content of the water tank - Tanque de agua - contenido	25 l	
Dimensioni di altezza/larghezza/profondità Dimensions height/width/depth Tamaño altura / ancho / profundidad	233 / 72 / 98 cm	
Peso totale senza accessori Total weight without accessories Peso total sin accesorios	165 kg	
Pinza "C" "C" gun - Pinza "C"	8692	8692
Lunghezza dei cavi Cables length - Longitud cables	4 m	6 m
Potenza nominale 50% ED Nominal power 50% ED / Potencia nominal 50% ED	22 kVA	22 kVA
Potenza massima di saldatura Maximum welding power / Potencia máxima de soldadura	129 kVA	129 kVA
Corrente termica 100% Thermal current 100% / Corriente térmica 100%	2,05 kA	2,05 kA
Tensione a vuoto secondaria No load secondary voltage / Tensión de vacío secundaria	7,7 V	7,7 V
Forza max. agli elettrodi a 8 bar Max. electrode force at 8 bar Fuerza max. a los electrodos a 8 bar	615 daN	615 daN
Sensore di riconoscimento Recognition sensor / Sensor de reconocimiento	S	S
Peso della pinza senza bracci Gun weight without arms - Peso pinza sin brazos	10,8 kg	10,8 kg

* Altre tensioni e frequenze a richiesta - * Different voltages and frequencies on demand - * Otras tensiones y frecuencias, bajo pedido

S = Smart Plus

