
## SPECIFICATIONS AND PERFORMANCE

| MODEL # | PART # | MAXIMUM DIMENSIONS | RATING* (NOMINAL) | INITIAL ΔP (PSI) @ FLOW RATE (GPM) |
|---|---|---|---|---|
| PD-1-934 | 155748-43 | 2.32" x 9.88" (59 mm x 251 mm) | 1 micron | <2 psi @ 2 gpm (<0.14 bar @ 7.6 Lpm) |
| PD-5-934 | 155749-43 | 2.32" x 9.88" (59 mm x 251 mm) | 5 micron | <2 psi @ 2 gpm (<0.14 bar @ 7.6 Lpm) |
| PD-10-934 | 155750-43 | 2.32" x 9.88" (59 mm x 251 mm) | 10 micron | <2 psi @ 2 gpm (<0.14 bar @ 7.6 Lpm) |
| PD-25-934 | 155751-43 | 2.32" x 9.88" (59 mm x 251 mm) | 25 micron | <2 psi @ 2 gpm (<0.14 bar @ 7.6 Lpm) |
| PD-50-934 | 155752-43 | 2.32" x 9.88" (59 mm x 251 mm) | 50 micron | <2 psi @ 2 gpm (<0.14 bar @ 7.6 Lpm) |
| PD-1-20 | 155755-43 | 2.32" x 20" (59 mm x 508 mm) | 1 micron | <2 psi @ 5 gpm (<0.14 bar @ 19 Lpm) |
| PD-5-20 | 155756-43 | 2.32" x 20" (59 mm x 508 mm) | 5 micron | <2 psi @ 5 gpm (<0.14 bar @ 19 Lpm) |
| PD-10-20 | 155757-43 | 2.32" x 20" (59 mm x 508 mm) | 10 micron | <2 psi @ 5 gpm (<0.14 bar @ 19 Lpm) |
| PD-25-20 | 155758-43 | 2.32" x 20" (59 mm x 508 mm) | 25 micron | <2 psi @ 5 gpm (<0.14 bar @ 19 Lpm) |
| PD-50-20 | 155759-43 | 2.32" x 20" (59 mm x 508 mm) | 50 micron | <2 psi @ 5 gpm (<0.14 bar @ 19 Lpm) |
| PD-1-30 | 155762-43 | 2.32" x 30" (59 mm x 762 mm) | 1 micron | <2 psi @ 7 gpm (<0.14 bar @ 26.5 Lpm) |
| PD-5-30 | 155763-43 | 2.32" x 30" (59 mm x 762 mm) | 5 micron | <2 psi @ 7 gpm (<0.14 bar @ 26.5 Lpm) |
| PD-10-30 | 155764-43 | 2.32" x 30" (59 mm x 762 mm) | 10 micron | <2 psi @ 7 gpm (<0.14 bar @ 26.5 Lpm) |
| PD-25-30 | 155765-43 | 2.32" x 30" (59 mm x 762 mm) | 25 micron | <2 psi @ 7 gpm (<0.14 bar @ 26.5 Lpm) |
| PD-1-40 | 155769-43 | 2.32" x 40" (59 mm x 1016 mm) | 1 micron | <2 psi @ 9 gpm (<0.14 bar @ 34 Lpm) |
| PD-5-40 | 155770-43 | 2.32" x 40" (59 mm x 1016 mm) | 5 micron | <2 psi @ 9 gpm (<0.14 bar @ 34 Lpm) |
| PD-25-40 | 155772-43 | 2.32" x 40" (59 mm x 1016 mm) | 25 micron | <2 psi @ 9 gpm (<0.14 bar @ 34 Lpm) |

*Not Performance Tested or Certified by NSF

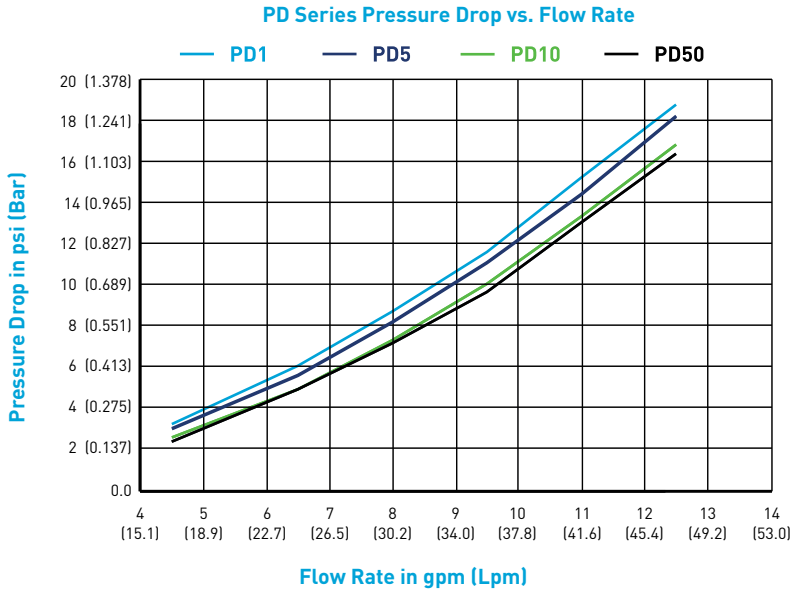


Data shown reflects the performance of 10" cartridges. 20", 30" and 40" cartridge pressure drops can be estimated by dividing the psi above by 2, 3 and 4 respectively at the same flow rate.

PENTAIR


**WATER QUALITY SYSTEMS**
5730 NORTH GLEN PARK ROAD, MILWAUKEE, WI 53209
P: 262.238.4400 | F: 262.238.4404
WATERPURIFICATION.PENTAIR.COM
CUSTOMER CARE: 800.279.9404 | tech-support@pentair.com


© 2016 Pentair Residential Filtration, LLC. All rights reserved.
§For a detailed list of where Pentair trademarks are registered, please visit waterpurification.pentair.com/brands. Pentair trademarks and logos are owned by Pentair plc or its affiliates. Third party registered and unregistered trademarks and logos are the property of their respective owners.


310094 REV D SE16