FIREFOX® 2 F

The pneumatic-hydraulic blind rivet nut tool with setting force control

No. 1451045



For special applications also with left-hand thread available!

TECHNICAL DATA

Weight	2.4 kg
Stroke, max.	10 mm
Setting force	22,000 N at 6 bar
Operating air pressure	5-7 bar
Air hose connection	6 Ø (1/4")
Air consumption	approx. 2-4 liter

WORKING RANGE

Ø mm

	M3	M4	M5	M6	M8	M10	M12
AL							
Steel							
A2							
A4							






Setting force guide

SCOPE OF DELIVERY

Threaded mandrels and M6 nosepiece (in working position), threaded mandrels and M4, M5 and M8 nosepieces (accessory), 2x 24/27 double open-ended wrenches, 1x 3mm, 1x 100ml bottle of hydraulic oil, 1x oil refill reservoir, quick-reference adjustment chart, colour code chart, operating instructions + spare parts list

ADVANTAGES

- With pure setting force adjustment
- Fast and precise pre-setting of the setting force using the colour-coded adjusting ring
- Optimum protection of the material being joined and the thread of the blind rivet nut
- Secure anchoring of the blind rivet nut
- High process reliability

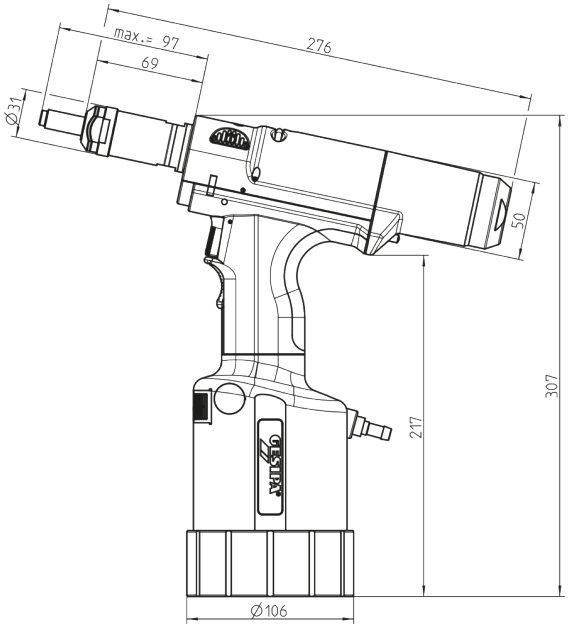

Dimensions in mm

262 270