
- det sikre valget


Tekniske Data

BM4010 BESKRIVELSE		
Rullefelt (600 mm valser)	L x B x H	2300 x 715 x 250 mm
Rullefelt (750 mm valser)	L x B x H	2530 x 715 x 250 mm
Rullefelt (1000 mm valser)	L x B x H	3030 x 715 x 250 mm
Rullediameter	Ø	182 / 204 mm
Rullelengde		600 / 750 / 1000 mm
Friksjonskoeffisient på rullene fra fabrikk	tør/våt	Min 0,7 / 0,6
Min. sporvidde		880 / 800 / 800 mm
Maks. sporvidde		2.080 / 2.300 / 2.800 mm
Avstand mellem valser center		354 mm
Maksimum akselvekt		3.500 / 4.000 kg
Gearmotorstørrelse		2,2 / 3,8 kW
Maks. bremsekraftmåling		625 / 1250 daN
Testhastighet		2,5 / 5,0 km/t
Nøyaktighet ved bremsekraftmåling		0 – 100 daN: ± 2 daN > 100 daN: ± 2 % FS
Nøyaktighet ved vektmåling		0 – 100 kg: ± 2 kg > 100 kg: ± 2 % FS
Nøyaktighet ved pedaltrykk måling		0 – 100 daN: ± 1 daN
Eltilslutning og sikring		3 x 400 Vac + N + PE Minimum 13 / 20 Amp 3 x 230 Vac + PE Minimum 20/35 Amp


600 mm

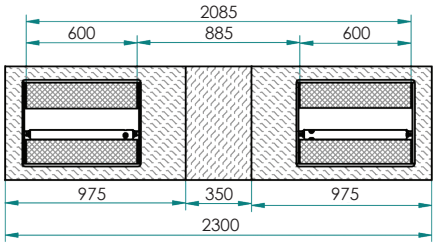

750 mm

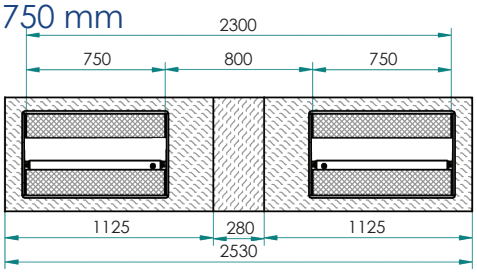

1000 mm

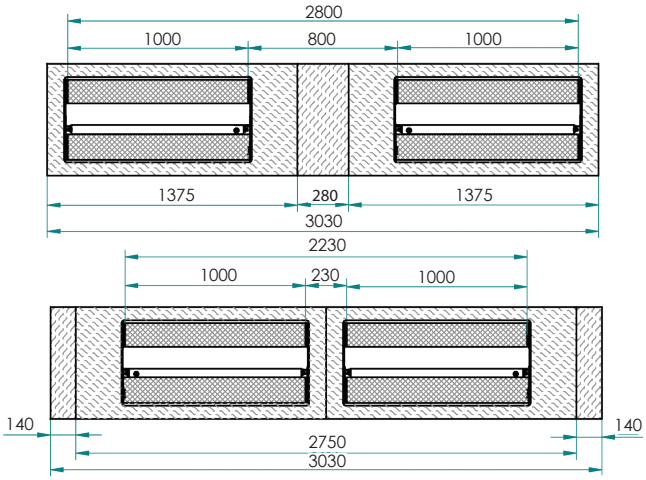

BM AUTOTEKNIK A/S
Erhvervsparken 7
9632 Møldrup
Danmark
Tlf.: +45 8669 2022
www.bmtest.dk

Rodin & Co as
AUTOUTSTYR - VERKSTEDUTSTYR- SNØKJETTING
Postboks 142, 2021 Skedsmokorset
Industriveien 1, 2020 Skedsmokorset
Tlf: 63 89 33 00 - Fax: 63 89 33 60 - Ordrekontor: 63 89 33 33 - Fax ordrekontor: 63 89 33 70
E-post: rodin@rodin.no - www.rodin.no



Texts and photos may present optional equipment available at additional cost. All functionality, features, specifications and other product information provided in this document including, but not limited to, the benefits, design, pricing, components, performance, availability, and capabilities of the product are subject to change without notice or obligation.