


2301-I Remote Airborne Particle Counter

0.1 CFM (2.83 LPM)

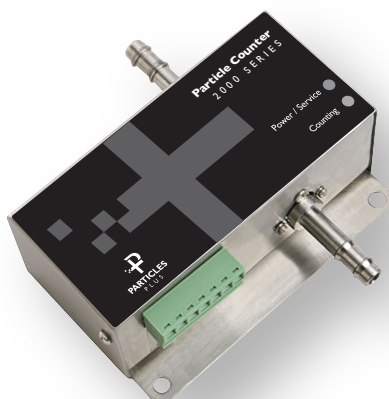

The Particles Plus 2301-I Remote Particle Counter measures 0.3 μm and 0.5 μm with a flow rate of 0.1 CFM (2.83 LPM). Integration is easy into a real-time monitoring or building management system via Modbus RTU or ASCII. The 2301 models are the smallest remote particle counters in the market and have easy mounting options. The Particles Plus 2301 units comply with ISO 21501-4 and include a 2 year limited warranty.

Features and Benefits

- 2301-I: Measures 0.3 μm and 0.5 μm
- 0.1 CFM (2.83 LPM) flow rate with onboard pressure loss alarm
- Long life laser diode technology
- World's smallest 0.1 CFM remote particle counter
- Measures 2 channels of simultaneous data.
- MODBUS™ RTU or ASCII Outputs
- Connect using RS485
- Concentration limit of 500,000 per ft^3
- LED Status Indication
- Complies with ISO 21501-4 and JIS B9921 standards
- Seamless integration into a facility monitoring system
- Light weight stainless steel enclosure
- 2 year warranty. Extended warranties available

Specifications

Model	2301-I
Channel Sizes	0.3 μm and 0.5 μm
Counting Efficiency	50% at 0.3 μm ; 100% for particles > 0.45 μm (per JIS)
Concentration Limits	500,000 particles / ft^3 at 5% coincidence loss
Light Source	Long life laser diode
Zero Count Level	<1 count / 5 minutes (per JIS B9921)
Flow Rate	0.1 CFM (2.83 LPM)
Flow Control	Critical orifice
Vacuum Requirements	External vacuum >15" (38.1 cm) of Hg
Calibration	NIST Traceable
Sample Probe/Tubing	Isokinetic sampling probe
Communication Interface	Modbus™ RTU or ASCII outputs (specified upon order)
Power	9-30VDC
Dimensions (L x W x H)	1.8" x 3.7" x 1.5" (4.5 cm x 9.3 cm x 3.8 cm) does not include probe
Weight	0.62 lb (0.28 kg)
Standards	ISO 21501-4 and JIS B9921
Warranty	2 year limited warranty
Operating Conditions	5° to 35°C 20% to 95%RH non-condensing
Storage Conditions	-20° to 50°C Up to 98%RH non-condensing
Optional Accessories	Isokinetic sampling probe, purge filter, vacuum and sample tubing


Patents US 9,140,638, US 9,140,639, US 9,157,847, US 9,158,652, US 9,677,990. Additional Patents Pending.

Particles Plus, Inc. reserves the right to change specifications without notice.
Contact hello@particlesplus.com or your local distributor for more details.
Particles Plus and the Particles Plus logo are trademarks of Particles Plus, Inc.
©2019 Particles Plus, Inc. All rights reserved. REV 20190518-2301-I



230I-4 Remote Airborne Particle Counter

0.1 CFM (2.83 LPM)

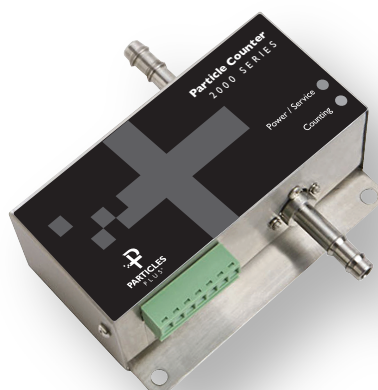

The Particles Plus 250I-I Remote Particle Counter measures 0.5 μm and 5.0 μm with a flow rate of 0.1 CFM (2.83 LPM). Integration is easy into a real-time monitoring or building management system via Modbus RTU or ASCII. The 250I-I models are the smallest remote particle counters in the market and have easy mounting options. The Particles Plus 250I-I units comply with ISO 21501-4 and include a 2 year limited warranty.

Features and Benefits

- 250I-I Measures 0.5 μm and 5 μm
- 0.1 CFM (2.83 LPM) flow rate with onboard pressure loss alarm
- Long life laser diode technology
- World's smallest 0.1 CFM remote particle counter
- Measures 2 channels of simultaneous data.
- MODBUS™ RTU or ASCII Outputs
- Connect using RS485
- Concentration limit of 500,000 per ft^3
- LED Status Indication
- Complies with ISO 21501-4 and JIS B9921 standards
- Seamless integration into a facility monitoring system
- Light weight stainless steel enclosure
- 2 year warranty. Extended warranties available

Specifications

Model	250I - I
Channel Sizes	0.5 μm and 5.0 μm
Counting Efficiency	50% at 0.5 μm ; 100% for particles > 0.75 μm (per JIS)
Concentration Limits	500,000 particles / ft^3 at 5% coincidence loss
Light Source	Long life laser diode
Zero Count Level	<1 count / 5 minutes (per JIS B9921)
Flow Rate	0.1 CFM (2.83 LPM)
Flow Control	Critical orifice
Vacuum Requirements	External vacuum >15" (38.1 cm) of Hg
Calibration	NIST Traceable
Sample Probe/Tubing	Isokinetic sampling probe
Communication Interface	Modbus™ RTU or ASCII outputs (specified upon order)
Power	9-30VDC
Dimensions (L x W x H)	1.8" x 3.7" x 1.5" (4.5 cm x 9.3 cm x 3.8 cm) does not include probe
Weight	0.62 lb (0.28 kg)
Standards	ISO 21501-4 and JIS B9921
Warranty	2 year limited warranty
Operating Conditions	5° to 35°C 20% to 95%RH non-condensing
Storage Conditions	-20° to 50°C Up to 98%RH non-condensing
Optional Accessories	Isokinetic sampling probe, purge filter, vacuum and sample tubing


Patents US 9,140,638, US 9,140,639, US 9,157,847, US 9,158,652, US 9,677,990. Additional Patents Pending.

Particles Plus, Inc. reserves the right to change specifications without notice.
Contact hello@particlesplus.com or your local distributor for more details.
Particles Plus and the Particles Plus logo are trademarks of Particles Plus, Inc.
©2019 Particles Plus, Inc. All rights reserved. REV 20190517-2301-4



250I-I Remote Airborne Particle Counter

0.1 CFM (2.83 LPM)

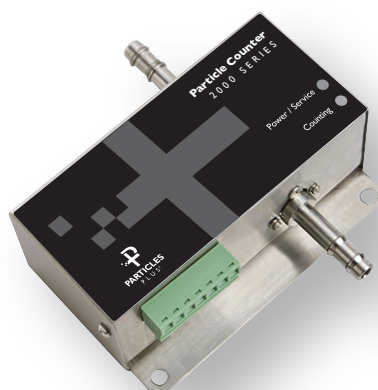

The Particles Plus 250I-I Remote Particle Counter measures 0.5 μm and 5.0 μm with a flow rate of 0.1 CFM (2.83 LPM). Integration is easy into a real-time monitoring or building management system via Modbus RTU or ASCII. The 250I-I models are the smallest remote particle counters in the market and have easy mounting options. The Particles Plus 250I-I units comply with ISO 21501-4 and include a 2 year limited warranty.

Features and Benefits

- 250I-I Measures 0.5 μm and 5 μm
- 0.1 CFM (2.83 LPM) flow rate with onboard pressure loss alarm
- Long life laser diode technology
- World's smallest 0.1 CFM remote particle counter
- Measures 2 channels of simultaneous data.
- MODBUS™ RTU or ASCII Outputs
- Connect using RS485
- Concentration limit of 500,000 per ft^3
- LED Status Indication
- Complies with ISO 21501-4 and JIS B9921 standards
- Seamless integration into a facility monitoring system
- Light weight stainless steel enclosure
- 2 year warranty. Extended warranties available

Specifications

Model	250I-I
Channel Sizes	0.5 μm and 5.0 μm
Counting Efficiency	50% at 0.5 μm ; 100% for particles > 0.75 μm (per JIS)
Concentration Limits	500,000 particles / ft^3 at 5% coincidence loss
Light Source	Long life laser diode
Zero Count Level	<1 count / 5 minutes (per JIS B9921)
Flow Rate	0.1 CFM (2.83 LPM)
Flow Control	Critical orifice
Vacuum Requirements	External vacuum >15" (38.1 cm) of Hg
Calibration	NIST Traceable
Sample Probe/Tubing	Isokinetic sampling probe
Communication Interface	Modbus™ RTU or ASCII outputs (specified upon order)
Power	9-30VDC
Dimensions (L x W x H)	1.8" x 3.7" x 1.5" (4.5 cm x 9.3 cm x 3.8 cm) does not include probe
Weight	0.62 lb (0.28 kg)
Standards	ISO 21501-4 and JIS B9921
Warranty	2 year limited warranty
Operating Conditions	5° to 35°C 20% to 95%RH non-condensing
Storage Conditions	-20° to 50°C Up to 98%RH non-condensing
Optional Accessories	Isokinetic sampling probe, purge filter, vacuum and sample tubing


Patents US 9,140,638, US 9,140,639, US 9,157,847, US 9,158,652, US 9,677,990. Additional Patents Pending.

Particles Plus, Inc. reserves the right to change specifications without notice.
Contact hello@particlesplus.com or your local distributor for more details.
Particles Plus and the Particles Plus logo are trademarks of Particles Plus, Inc.
©2019 Particles Plus, Inc. All rights reserved. REV 20190517-250I-I



250I-4 Remote Airborne Particle Counter

0.1 CFM (2.83 LPM)

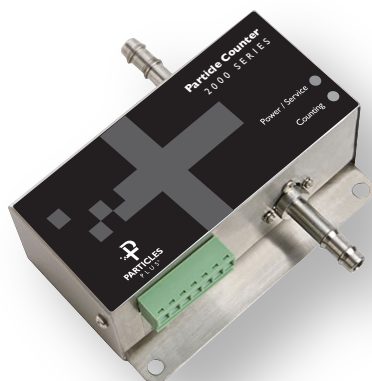

The Particles Plus 250I-4 Remote Particle Counter measures 0.5 μm , 0.7 μm , 1.0 μm & 5.0 μm with a flow rate of 0.1 CFM (2.83 LPM). Integration is easy into a real-time monitoring or building management system via Modbus RTU or ASCII. The 250I models are the smallest remote particle counters in the market and have easy mounting options. The Particles Plus 250I-4 units comply with ISO 21501-4 and include a 2 year limited warranty.

Features and Benefits

- 250I-4: Measures 0.5 μm , 0.7 μm , 1.0 μm & 5.0 μm
- 0.1 CFM (28.3 LPM) flow rate with onboard pressure loss alarm
- Long life laser diode technology
- World's smallest 0.1 CFM remote particle counter
- Measures 4 channels of simultaneous data.
- MODBUS™ RTU or ASCII Outputs
- Connect using RS485
- Concentration limit of 500,000 per ft^3
- LED Status Indication
- Complies with ISO 21501-4 and JIS B9921 standards
- Seamless integration into a facility monitoring system
- Light weight stainless steel enclosure
- 2 year warranty. Extended warranties available

Specifications

Model	250I-4
Channel Sizes	0.5 μm , 0.7 μm , 1.0 μm & 5.0 μm
Counting Efficiency	50% at 0.5 μm ; 100% for particles > 0.75 μm (per JIS)
Concentration Limits	500,000 particles / ft^3 at 5% coincidence loss
Light Source	Long life laser diode
Zero Count Level	<1 count / 5 minutes (per JIS B9921)
Flow Rate	0.1 CFM (2.83 LPM)
Flow Control	Critical orifice
Vacuum Requirements	External vacuum >15" (38.1 cm) of Hg
Calibration	NIST Traceable
Sample Probe/Tubing	Isokinetic sampling probe
Communication Interface	Modbus™ RTU or ASCII outputs (specified upon order)
Power	9-30VDC
Dimensions (L x W x H)	1.8" x 3.7" x 1.5" (4.5 cm x 9.3 cm x 3.8 cm) does not include probe
Weight	0.62 lb (0.28 kg)
Standards	ISO 21501-4 and JIS B9921
Warranty	2 year limited warranty
Operating Conditions	5° to 35°C 20% to 95%RH non-condensing
Storage Conditions	-20° to 50°C Up to 98%RH non-condensing
Optional Accessories	Isokinetic sampling probe, purge filter, vacuum and sample tubing


Patents US 9,140,638, US 9,140,639, US 9,157,847, US 9,158,652, US 9,677,990. Additional Patents Pending.

Particles Plus, Inc. reserves the right to change specifications without notice.
Contact hello@particlesplus.com or your local distributor for more details.
Particles Plus and the Particles Plus logo are trademarks of Particles Plus, Inc.
©2019 Particles Plus, Inc. All rights reserved. REV 20190518-250I-4



2510-I Remote Airborne Particle Counter

1.0 CFM (28.3 LPM)

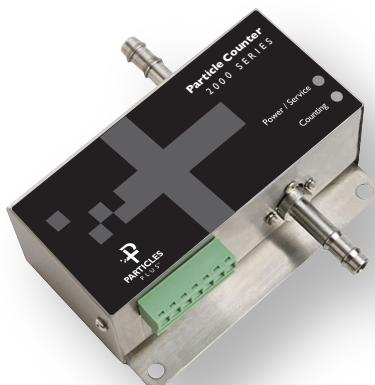

The Particles Plus 2510-I Remote Particle Counter measures 0.5 μm and 5.0 μm with a flow rate of 1.0 CFM (28.3 LPM). Integration is easy into a real-time monitoring or building management system via Modbus™ RTU or ASCII. The P231 is the smallest remote particle counter in the market and has easy mounting options. The Particles Plus 2510-I complies with ISO 21501-4 and includes a 2 year limited warranty

Features and Benefits

- 2510-I: Measures 0.5 μm & 5.0 μm
- 1.0 CFM (28.3 LPM) flow rate with onboard pressure loss alarm
- Long life laser diode technology
- World's smallest 1 CFM remote particle counter
- Measures 2 channels of simultaneous data.
- MODBUS™ RTU or ASCII Outputs
- Connect using RS485
- Concentration limit of 500,000 per ft^3
- LED Status Indication
- Complies with ISO 21501-4 and JIS B9921 standards
- Seamless integration into a facility monitoring system
- Light weight stainless steel enclosure
- 2 year warranty. Extended warranties available

Specifications

Model	2510-I
Channel Sizes	0.5 μm and 5.0 μm
Counting Efficiency	50% at 0.5 μm ; 100% for particles > 0.75 μm (per JIS)
Concentration Limits	500,000 particles / ft^3 at 5% coincidence loss
Light Source	Long life laser diode
Zero Count Level	<1 count / 5 minutes (per JIS B9921)
Flow Rate	1.0 CFM (28.3 LPM)
Flow Control	Critical orifice
Vacuum Requirements	External vacuum >15" (38.1 cm) of Hg
Calibration	NIST Traceable
Sample Probe/Tubing	Isokinetic sampling probe
Communication Interface	Modbus™ RTU or ASCII outputs (specified upon order)
Power	9-30VDC
Dimensions (L x W x H)	1.8" x 3.7" x 1.5" (4.5 cm x 9.3 cm x 3.8 cm) does not include probe
Weight	0.62 lb (0.28 kg)
Standards	ISO 21501-4 and JIS B9921
Warranty	2 year limited warranty
Operating Conditions	5° to 35°C 20% to 95%RH non-condensing
Storage Conditions	-20° to 50°C Up to 98%RH non-condensing
Optional Accessories	Isokinetic sampling probe, purge filter, vacuum and sample tubing


Patents US 9,140,638, US 9,140,639, US 9,157,847, US 9,158,652, US 9,677,990. Additional Patents Pending.

Particles Plus, Inc. reserves the right to change specifications without notice.
Contact hello@particlesplus.com or your local distributor for more details.
Particles Plus and the Particles Plus logo are trademarks of Particles Plus, Inc.
©2019 Particles Plus, Inc. All rights reserved. REV 20190520-2510-I



2510-4 Remote Airborne Particle Counter

1.0 CFM (28.3 LPM)

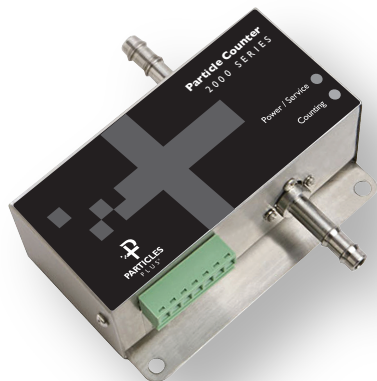

The Particles Plus 2510-4 Remote Particle Counter measures 0.5 μm , 0.7 μm , 1.0 μm & 5.0 μm with a flow rate of 1.0 CFM (28.3 LPM). Integration is easy into a real-time monitoring or building management system via Modbus™ RTU or ASCII. The P231 is the smallest remote particle counter in the market and has easy mounting options. The Particles Plus 2510-4 complies with ISO 21501-4 and includes a 2 year limited warranty

Features and Benefits

- 2510-4: Measures 0.5 μm , 0.7 μm , 1.0 μm & 5.0 μm
- 1.0 CFM (28.3 LPM) flow rate with onboard pressure loss alarm
- Long life laser diode technology
- World's smallest 1 CFM remote particle counter
- Measures 4 channels of simultaneous data.
- MODBUS™ RTU or ASCII Outputs
- Connect using RS485
- Concentration limit of 500,000 per ft^3
- LED Status Indication
- Complies with ISO 21501-4 and JIS B9921 standards
- Seamless integration into a facility monitoring system
- Light weight stainless steel enclosure
- 2 year warranty. Extended warranties available

Specifications

Model	2510-4
Channel Sizes	0.5 μm , 0.7 μm , 1.0 μm & 5.0 μm
Counting Efficiency	50% at 0.5 μm ; 100% for particles > 0.75 μm (per JIS)
Concentration Limits	500,000 particles / ft^3 at 5% coincidence loss
Light Source	Long life laser diode
Zero Count Level	<1 count / 5 minutes (per JIS B9921)
Flow Rate	1.0 CFM (28.3 LPM)
Flow Control	Critical orifice
Vacuum Requirements	External vacuum >15" (38.1 cm) of Hg
Calibration	NIST Traceable
Sample Probe/Tubing	Isokinetic sampling probe
Communication Interface	Modbus™ RTU or ASCII outputs (specified upon order)
Power	9-30VDC
Dimensions (L x W x H)	1.8" x 3.7" x 1.5" (4.5 cm x 9.3 cm x 3.8 cm) does not include probe
Weight	0.62 lb (0.28 kg)
Standards	ISO 21501-4 and JIS B9921
Warranty	2 year limited warranty
Operating Conditions	5° to 35°C 20% to 95%RH non-condensing
Storage Conditions	-20° to 50°C Up to 98%RH non-condensing
Optional Accessories	Isokinetic sampling probe, purge filter, vacuum and sample tubing

Patents US 9,140,638, US 9,140,639, US 9,157,847, US 9,158,652, US 9,677,990. Additional Patents Pending.

Particles Plus, Inc. reserves the right to change specifications without notice.
Contact hello@particlesplus.com or your local distributor for more details.
Particles Plus and the Particles Plus logo are trademarks of Particles Plus, Inc.
©2019 Particles Plus, Inc. All rights reserved. REV 20190517-2510-4

