



Best H Flow Control Ltd
www.topflowcontrol.com


2PC FLANGED BALL VALVE WITH DIRECT MOUNTING PAD(DIN)

Suite 140,700 Third Line, Oakville, ON L6L 4B1, Canada



FEATURES:

- PN16-PN40
- Full Port
- Investment Casting
- Blow-out Proof Stem
- ISO5211 Mounting Pad
- PED97/23/EC Approved
- Casting Approved AD2000-WO
- Design:EN12516
- Flange Standard:DIN2542-DIN2545
- Inspection Testing:DIN3230,EN12266

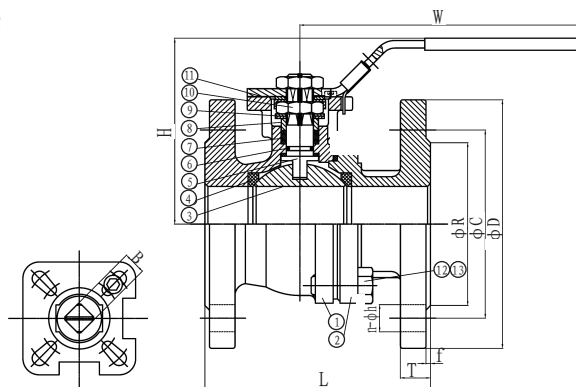

ITEM	DESIGNATION	MATERIAL
1	BODY	1.4408
2	CAP	1.4408
3	BALL	1.4408
4	SEAT	PTFE+15%GF
5	STEM	316
6	O-RING	VITON
7	STEM PACKING	PTFE
8	GLAND	316
9	BELLEVILLE WASHER	A240-301
10	NUT	304
11	HANDLE	304
12	BOLT	304
13	NUT	304

SIZE	L	H	W	f	B	P	PN16					PN40				
							D	T	R	C	n-Φh	D	T	R	C	n-Φh
1/2"	115	80	140	2	9	F03/F04	95	16	45	65	4-Φ14	95	16	45	65	4-Φ14
3/4"	120	85	140	2	9	F03/F04	105	18	58	75	4-Φ14	105	18	58	75	4-Φ14
1"	125	95	140	2	11	F04/F05	115	18	68	85	4-Φ14	115	18	68	85	4-Φ14
1 1/4"	130	108	140	2	11	F04/F05	140	18	78	100	4-Φ18	140	18	78	100	4-Φ18
1 1/2"	140	114	140	3	14	F05/F07	150	18	88	110	4-Φ18	150	18	88	110	4-Φ18
2"	150	124	140	3	14	F05/F07	165	20	102	125	4-Φ18	165	20	102	125	4-Φ18
2 1/2"	170	148	140	3	17	F07/F10	185	18	122	145	4-Φ18	185	22	122	145	8-Φ18
3"	180	158	140	3	17	F07/F10	200	20	138	160	8-Φ18	200	24	138	160	8-Φ18
4"	190	191	140	3	22	F10	220	20	158	180	8-Φ18	235	24	162	190	8-Φ22
5"	325	230	140	3	27	F12	250	22	188	210	8-Φ18	270	26	188	220	8-Φ26
6"	350	255	140	3	27	F12	285	22	212	240	8-Φ22	300	28	218	250	8-Φ26

+1-289-351-0977

TopFlowControl@gmail.com

BEST H FLOW
CONTROL LTD