



Best H Flow Control Ltd  
www.topflowcontrol.com


## 3PC SOCKET WELD BALL VALVE

Suite 140,700 Third Line, Oakville, ON L6L 4B1, Canada



### FEATURES:

- o 1000PSI/PN63
- o Full Port
- o Investment Casting
- o Blow-out Proof Stem
- o Locking Device Handle(Optional)
- o PED97/23/EC Approved
- o Casting Approved AD2000-W0
- o Socket Weld: ASME B16.11
- o Inspection Testing:API598,EN12266

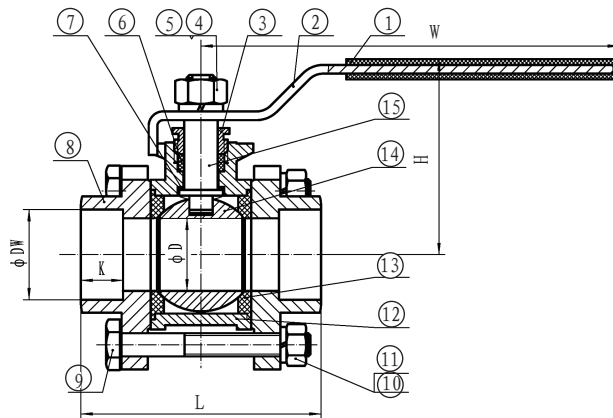

| ITEM | DESIGNATION   | MATERIAL |
|------|---------------|----------|
| 1    | PLASTIC COVER | PLASTIC  |
| 2    | HANDLE        | 304      |
| 3    | GLAND NUT     | 304      |
| 4    | STEM NUT      | 304      |
| 5    | THRUST WASHER | 304      |
| 6    | STEM PACKING  | PTFE     |
| 7    | SEAL          | PTFE     |
| 8    | CAP           | CF8/CF8M |
| 9    | BOLT          | 304      |
| 10   | NUT           | 304      |
| 11   | THRUST WASHER | 304      |
| 12   | BODY          | CF8/CF8M |
| 13   | SEAT          | RPTFE    |
| 14   | BALL          | CF8/CF8M |
| 15   | STEM          | 304/316  |

| SIZE | 1/4" | 3/8" | 1/2"  | 3/4" | 1"   | 1 1/4" | 1 1/2" | 2"   | 2 1/2" | 3"  | 4"    |
|------|------|------|-------|------|------|--------|--------|------|--------|-----|-------|
| D    | 11   | 12.5 | 15    | 20   | 25   | 32     | 38     | 50   | 65     | 76  | 94    |
| L    | 64   | 64   | 72    | 80   | 85   | 105    | 113    | 132  | 170    | 186 | 226   |
| H    | 48   | 48   | 50    | 56   | 67   | 72     | 93     | 101  | 118    | 128 | 168   |
| W    | 105  | 105  | 105   | 126  | 144  | 144    | 189    | 189  | 224    | 224 | 298   |
| DW   | 14.2 | 17.6 | 21.85 | 27.2 | 33.9 | 42.7   | 48.8   | 48.8 | 77.1   | 90  | 115.9 |
| K    | 9.6  | 9.6  | 9.6   | 12.7 | 12.7 | 12.7   | 12.7   | 12.7 | 16     | 16  | 17    |

+ 1-289-351-0977

TopFlowControl@gmail.com

BEST H FLOW  
CONTROL LTD