

## DS-2CE10DFT-F 2 MP Full Time Color Bullet Camera

ColorVu



### Key Feature

- 2 MP high performance CMOS
- 1920 × 1080 resolution
- Full time color
- 3.6 mm, 6 mm fixed lens
- Up to 20 m white light distance
- OSD menu, 3D DNR, true WDR
- 4 in 1 video output (switchable TVI/AHD/CVI/CVBS)
- IP67
- Up the coax (HIKVISION-C)




## Specification

| <b>Camera</b>                |                                                                                                                                                  |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Image Sensor                 | 2 MP CMOS image sensor                                                                                                                           |
| Resolution                   | 1920 (H) × 1080 (V)                                                                                                                              |
| Frame Rate                   | PAL: 1080p@25fps<br>NTSC: 1080p@30fps                                                                                                            |
| Min. illumination            | Color: 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with white light                                                                                       |
| Shutter Time                 | PAL: 1/25 s to 1/50, 000 s<br>NTSC: 1/30 s to 1/50, 000 s                                                                                        |
| Slow Shutter                 | Max. 16x                                                                                                                                         |
| Lens                         | 3.6 mm, 6 mm fixed lens                                                                                                                          |
| Field of View                | 3.6 mm, horizontal FOV: 83.0°, vertical FOV: 44.4°, diagonal FOV: 98.0°<br>6 mm, horizontal FOV: 51.0°, vertical FOV: 28.5°, diagonal FOV: 58.7° |
| Lens Mount                   | M16                                                                                                                                              |
| Day & Night                  | Color                                                                                                                                            |
| Angle Adjustment             | Pan: 0° to 360°; Tilt: 0° to 180°; Rotate: 0° to 360°                                                                                            |
| Synchronization              | Internal synchronization                                                                                                                         |
| WDR (Wide Dynamic Range)     | 130 dB                                                                                                                                           |
| <b>Menu</b>                  |                                                                                                                                                  |
| Image Mode                   | STD/HIGH SAT                                                                                                                                     |
| AGC                          | Yes                                                                                                                                              |
| White Balance                | Auto/Manual                                                                                                                                      |
| HLC                          | Yes                                                                                                                                              |
| BLC (Backlight Compensation) | Yes                                                                                                                                              |
| Privacy Mask                 | 4 programmable privacy masks                                                                                                                     |
| Motion Detection             | 4 programmable areas                                                                                                                             |
| WDR                          | Yes                                                                                                                                              |
| Functions                    | Brightness, Sharpness, 3D DNR, Mirror, Smart light                                                                                               |
| <b>Interface</b>             |                                                                                                                                                  |
| Video Output                 | 1 HD analog output                                                                                                                               |
| Switch Button                | TVI/AHD/CVI/CVBS                                                                                                                                 |
| <b>General</b>               |                                                                                                                                                  |
| Operating Conditions         | -40 °C to 60 °C (-40 °F to 140 °F), humidity: 90% or less (non-condensation)                                                                     |
| Power Supply                 | 12 VDC ±25%<br><i>*You are recommended to use one power adapter to supply the power for one camera.</i>                                          |
| Power Consumption            | Max. 3 W                                                                                                                                         |
| Protection Level             | IP67                                                                                                                                             |
| Material                     | Metal                                                                                                                                            |
| White Light                  | Up to 20 m                                                                                                                                       |
| Communication                | Up the coax, Protocol: HIKVISION-C (TVI output)                                                                                                  |
| Dimensions                   | 181.4 mm × 70 mm × 68 mm (7.14" × 2.75" × 2.68")                                                                                                 |
| Weight                       | Approx. 390 g (0.86 lb.)                                                                                                                         |


## Order Model

DS-2CE10DFT-F

## Dimension

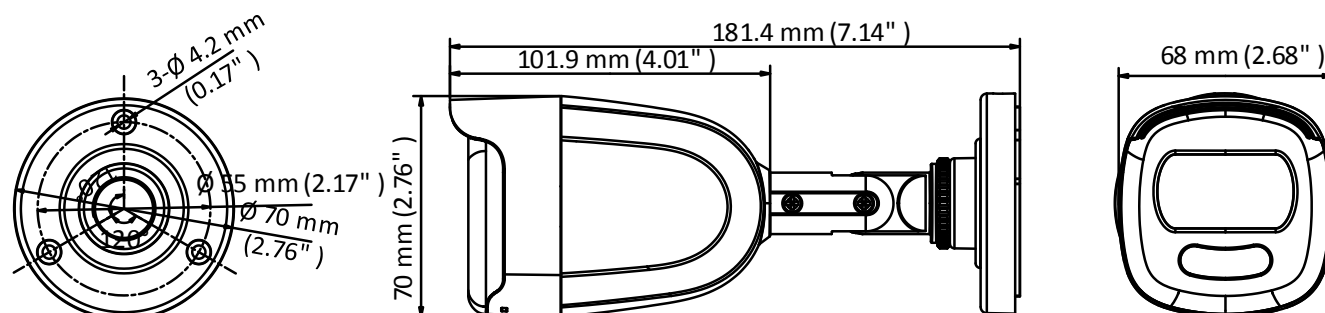

## Accessory

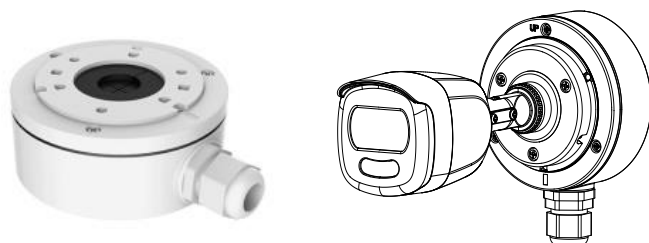

DS-1280ZJ-XS

Junction Box

Distributed by



### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
saleseuro@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-444  
info.fr@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision UK**  
T +44-1628-9021-4  
support.uk@hikvision.com