



# 172101

## ZP7 Series Addressable MCP, RED, Flush Mount with EN54 Marking

### Modern stylish design

The ZP785-3 is an addressable call point of stylish design, providing a manual means of initiating a fire alarm on ZP2 & ZP3 addressable systems. Complying with EN 54 Part 11, the ZP785-3 is suitable for installations meeting the recommendations of many local codes (e.g. BS 5839 Part 1).

The unit is operated either by pressing a resettable element (EN54 Part 11) or by breaking a frangible glass with finger pressure. Glass elements have clear vinyl coatings on the front surface to prevent operator injury and to inhibit the release of loose fragments as the glass is broken. Both operating elements are easily interchangeable.

### Plug in loop connection

Installed as part of the ZP3 addressable system, up to 127 devices (call points, sensors and interface units) can be connected to each of the control panel loops. All loop devices incorporate switch settings enabling them to be assigned a unique address, which is polled by the panel every two seconds.


ZP785-3 callpoints are designed for semi recessed fixing, using a standard single gang socket box, or can be surface mounted by means of a DMN787 matching plastic back box. Push in terminals enable the device to be plugged directly into the loop, making replacement simple and reducing internal cable ends to a minimum.

System testing, glass replacement and reset are carried out by using a special maintenance tool enabling part of the front moulding including the glass, to be lowered, allowing the device to operate.

### Polycarbonate front cover option

Rated at IP24 the ZP785-3 moulding is constructed of ABS plastic and intended for indoor applications. A red LED indicator is prominently positioned on the front of the unit, which illuminates when the device is operated.

For locations where malicious operation, or accidental impact from flying objects may occur (for example sports halls), operation can be restricted by the addition of a clear, polycarbonate, front cover (DMN800), which can be further protected by a cover seal (DMN798).

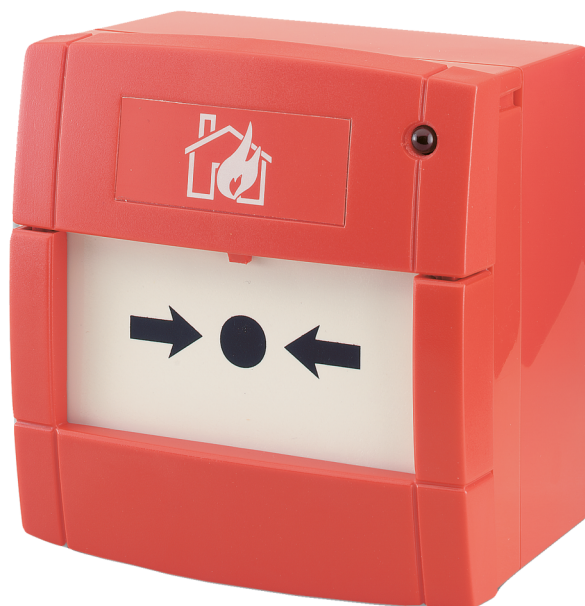

### Details

- Modern stylish design
- EN54:11 approved and CPR certified
- Resettable or frangible operating elements
- Single maintenance test tool
- Plug in loop connection

# 172101

## ZP7 Series Addressable MCP, RED, Flush Mount with EN54 Marking

### Technical specifications

#### General

Compatibility	All ZP7 addressable systems
---------------	-----------------------------

#### Electrical

Operating voltage	Loop 19.5 to 20.5 V
Current consumption	400µA (quiescent) 450µA (alarm)

#### Physical

Physical dimensions	93 x 89 x 28 mm (H X W X D)
Net weight	125 g
Colour	Red
Mounting type	Flush Mount
Material (body)	Moulded ABS
Dimensions (h x w x d)	93 x 89 x 27.5mm

#### Environmental

Operating temperature	-10 to +55°C
Storage temperature	-20 to +70°C
Relative humidity	20 to 95% noncondensing
Environment	Indoor
IP rating	IP24D
Application	Type A - Indoor installation

#### Standards & regulation

Certification	EN54-11
---------------	---------

#### Addressing method

7 way dipswitch
-----------------

#### Wiring

2 core loop
-------------

#### Monitoring

Open/short circuit, removal & device type
---

#### Operating principle


Micro switch
--------------

#### Indication

Alarm LED (red)
-----------------

#### EMC

CE marked (EEC89/336)
-----------------------

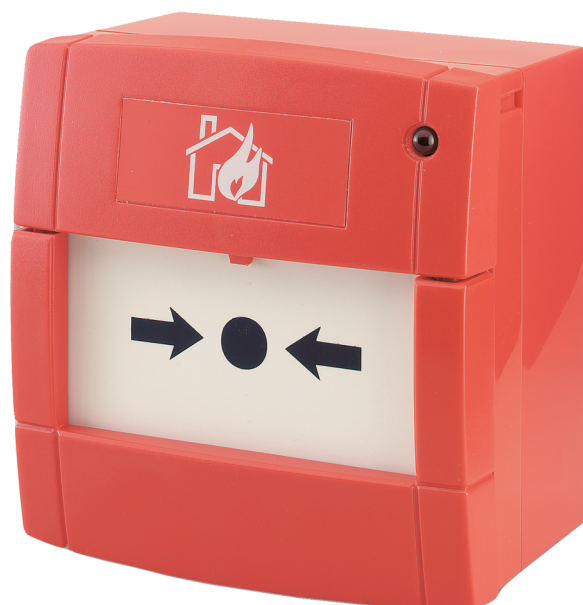

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.