

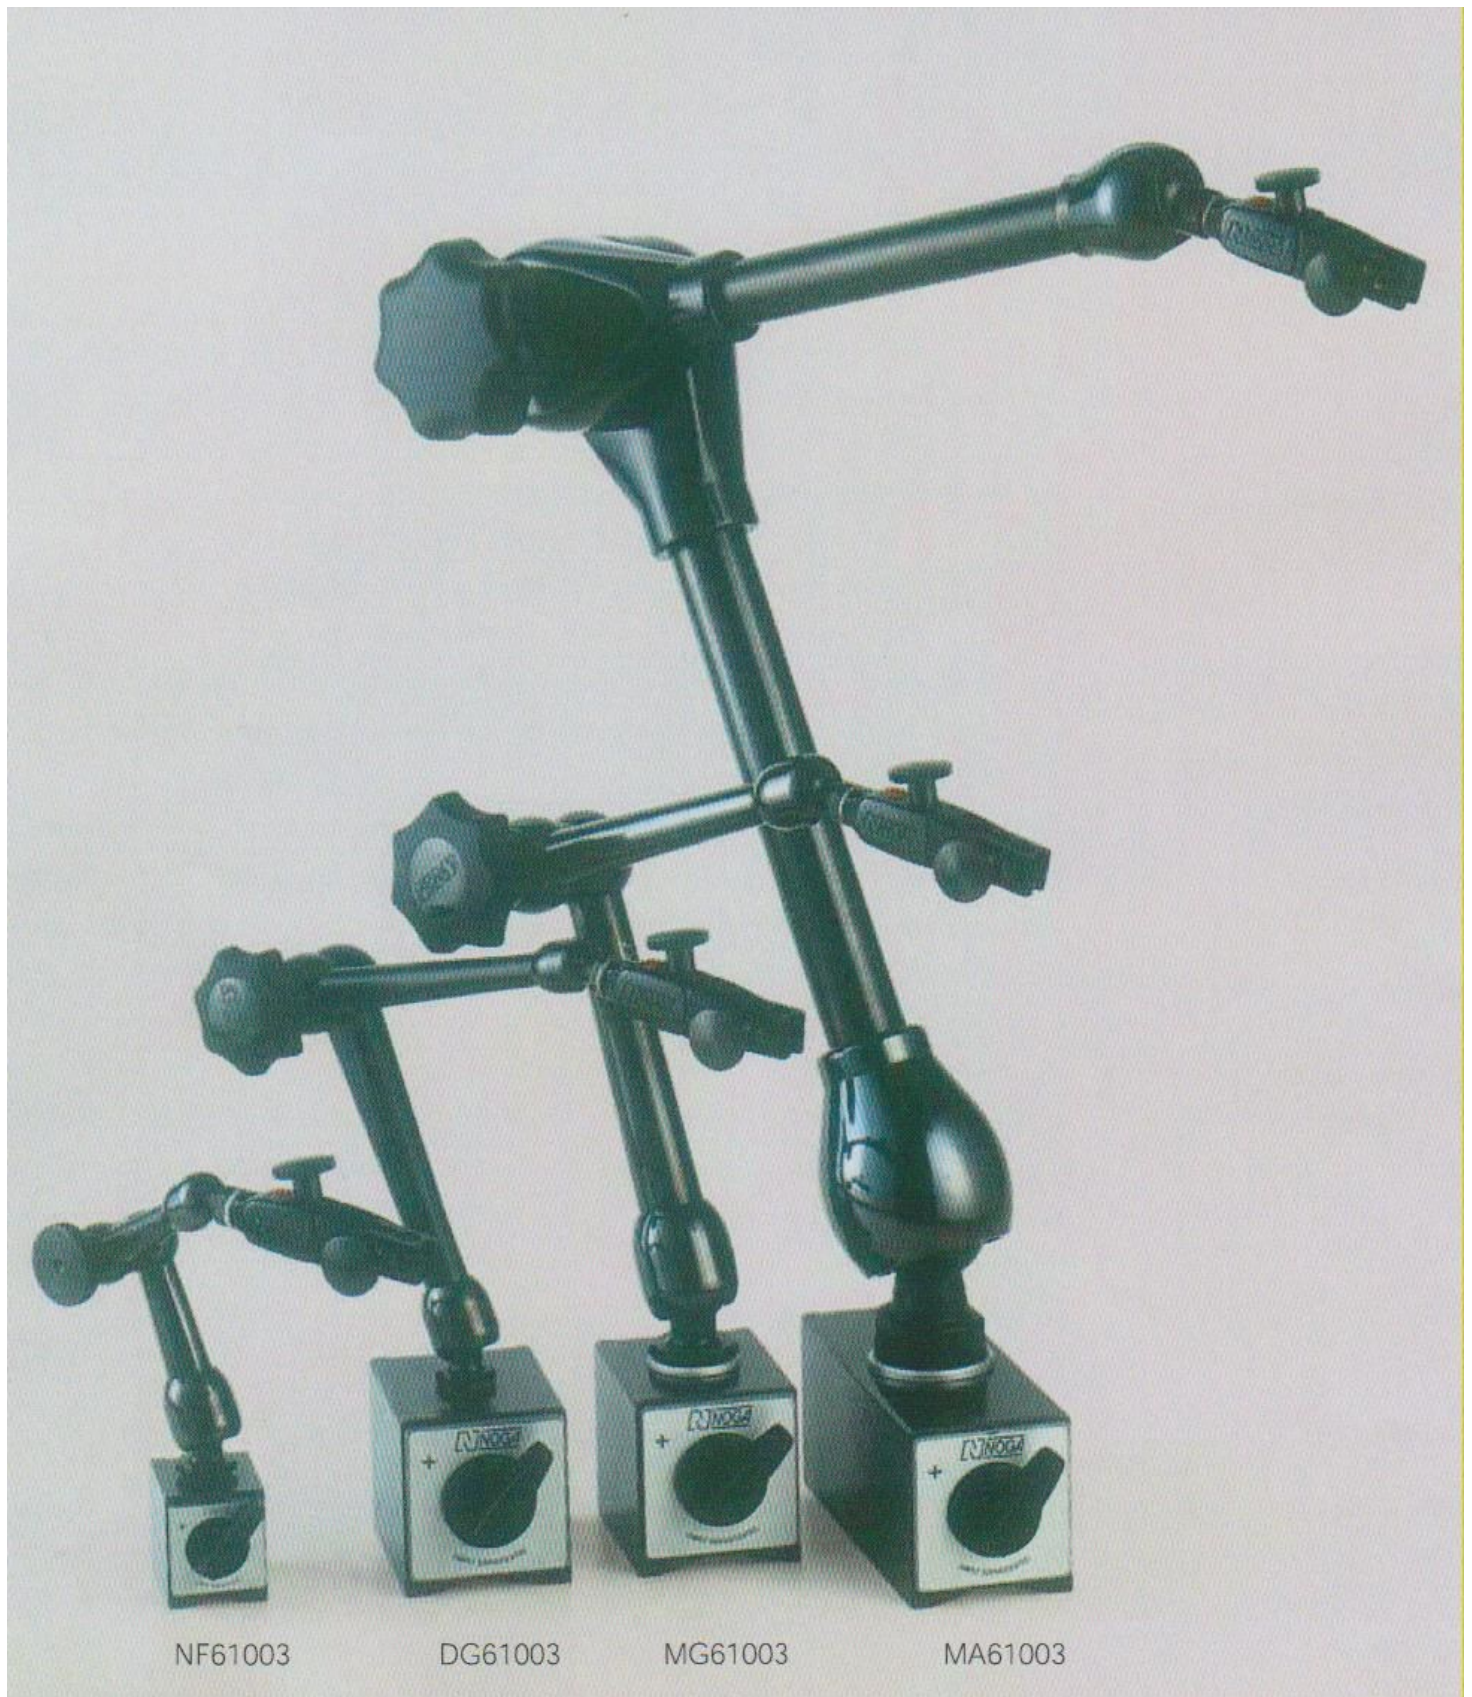


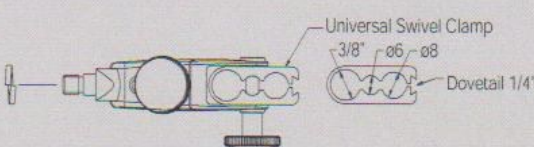

NOGA articulated holders with fine adjustment on top


Due to its stability and ease of use, NOGA articulated holder has become the industry most wanted.

- New fine adjustment on top with universal swivel clamp.
- Holds 6mm, 8mm, 3/8", dovetail and back lug.
- Central locking mechanism with NOGA designed spring loaded bearing.
- Five axis holder.
- Powerful on/off magnetic base.
- Instant fixation in any position.
- Fast and easy to set up gauges into required position.
- Black finished arms.

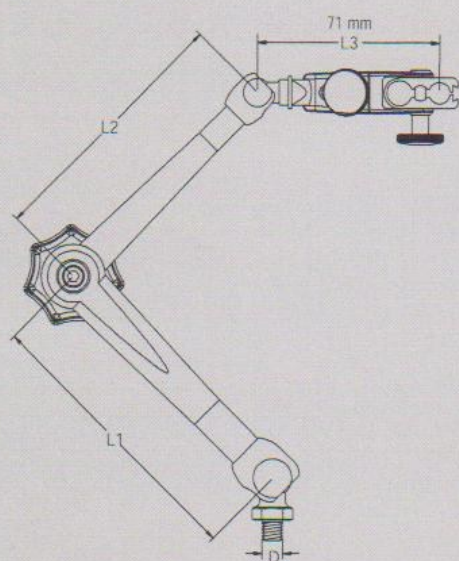

FA1500

FA1510





see page 18

All measurements are in mm unless otherwise mentioned.

Order no.	Holder		Arm length			Magnet			
	Bottom thread	Weight	Bottom arm	Top arm	Total	Force	Dimension		
	D	[Kg]	L1	L2	L1 + L2 + L3	[N]	W	L	H
NF61003	Ext. M5	0.520	56	51	178	320	30	40	35
NF60103	Ext. M5	0.320	56	51	178	-	-	-	-
DG61003	Ext. M8	1.350	110	101	282	800	50	60	55
DG60103	Ext. M8	0.340	110	101	282	-	-	-	-
MG61003	Ext. M8	1.900	133	113	317	800	50	60	55
MG60103	Ext. M8	0.900	133	113	317	-	-	-	-
MA61003	Ext. M10 x 1.25	5.100	326	242	637	1300	50	120	55
MA60103	Ext. M10 x 1.25	3.100	326	242	637	-	-	-	-

Packed Weight and Dimensions

Code	Weight g	W mm	H mm	L mm
NF 61003	527	50	40	155
DG 61003	1380	88	65	285
MG 61003	1903	90	70	280
MG 71003	1945	90	65	285
MA 61003	4100	140	68	365

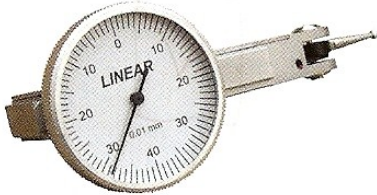 Horizontal Style	 Vertical Style	General Specifications: Fully jeweled movements Adjustable bezel Satin chrome body with dovetail on 3 sides Supplied with 6 & 8mm Spigots Replacement Spigot Codes 6mm = 55-100-060, 8mm = 55-100-080
--	---	--

Range Details Metric:

Code	Dial Dia	Grads.	Range	Single Rev.	Scale Reading	Grads. Per Rev	Indicator Style	Replacement Styli
	mm	mm	mm	mm	mm			
55-100-010	32	0.01	0.8	0.8	0-40-0	80	Horizontal	55-100-030
55-105-010	40	0.01	0.8	0.8	0-40-0	80	Horizontal	55-100-030
55-200-010	40	0.002	0.2	0.2	0-100-0	100	Horizontal	55-199-050
55-150-010	32	0-01	0.8	0.8	0-40-0	80	Vertical	55-100-030
55-100-200	40	0.01mm 0.0005in	0.06mm 0.03in	0.06mm 0.03in	0-30-0 0-15-0	60 60	Horizontal	55-100-020

Range Details Inch:

Code	Dial Dia	Grads.	Range	Single Rev.	Scale Reading	Grads. Per Rev	Indicator Style	Replacement Styli
		inch	inch	inch	inch			
55-100-005	32	0.0005	0.03	0.03	0-15-0	60	Horizontal	55-100-020
55-105-005	40	0.0005	0.03	0.03	0-15-0	60	Horizontal	55-100-020
55-200-005	40	0.0001	0.008	0.008	0-40-0	80	Horizontal	55-199-040
55-150-005	32	0.0005	0.03	0.03	0-15-0	60	Vertical	55-100-020

Accuracy Specifications:

Dial Graduations	Any One Division	Any Five Divisions	Any Half Revolution
Metric			
0.01	0.002	0.005	0.01
0.002	0.0005	0.001	0.002
Inch			
0.0005	0.0001	0.0002	0.0004
0.0001	0.00003	0.0005	0.0001



General Specifications:

Adjustable dial

Hardened & ground racks

Bezel lock

Lug back fitting

Tolerance pointers (not fitted to DG-100M)

Fitted with ball anvil


Anvil thread 2.5mm

Range Details Metric:

Code	Dial Dia./ mm	Travel / mm	Grads. / mm	Reading	Dial Colour
DG-1MM	40	1.0	0.001	0-100 c/w	White
DG-5M	40	5.0	0.01	0-100 c/w, 0-100 a/c	White
DG-M	60	10.0	0.01	0-100 c/w, 0-100 a/c	White
DG-MB	60	10.0	0.01	0-100 c/w, 0-100 a/c	Black
DG-MSP	60	10.0	0.01	0-100 c/w, 0-100 a/c	White
DG-25M	60	25.0	0.01	0-100 c/w, 0-100 a/c	White
DG-25MB	60	25.0	0.01	0-100 c/w, 0-100 a/c	Black
DG-50M	76	50.0	0.01	0-100 c/w, 0-100 a/c	White
DG-100M	80	100.0	0.01		White

Range Details Inch:

Code	Dial Dia inch	Travel. inch	Grads. inch	Reading	Dial Colour
DG-1/4	1.58	0.25	0.001	0-100 c/w	White
DG-1/2S	2.35	0.50	0.001	0-100 c/w, 0-100 a/c	White
DG-1/2SB	2.35	0.50	0.001	0-100 c/w, 0-100 a/c	Black
DG-1S	2.35	1.00	0.001	0-100 c/w, 0-100 a/c	White
DG-1SB	2.35	1.00	0.001	0-100 c/w, 0-100 a/c	Black
DG-2S	3.0	2.00	0.001	0-100 c/w, 0-100 a/c	White

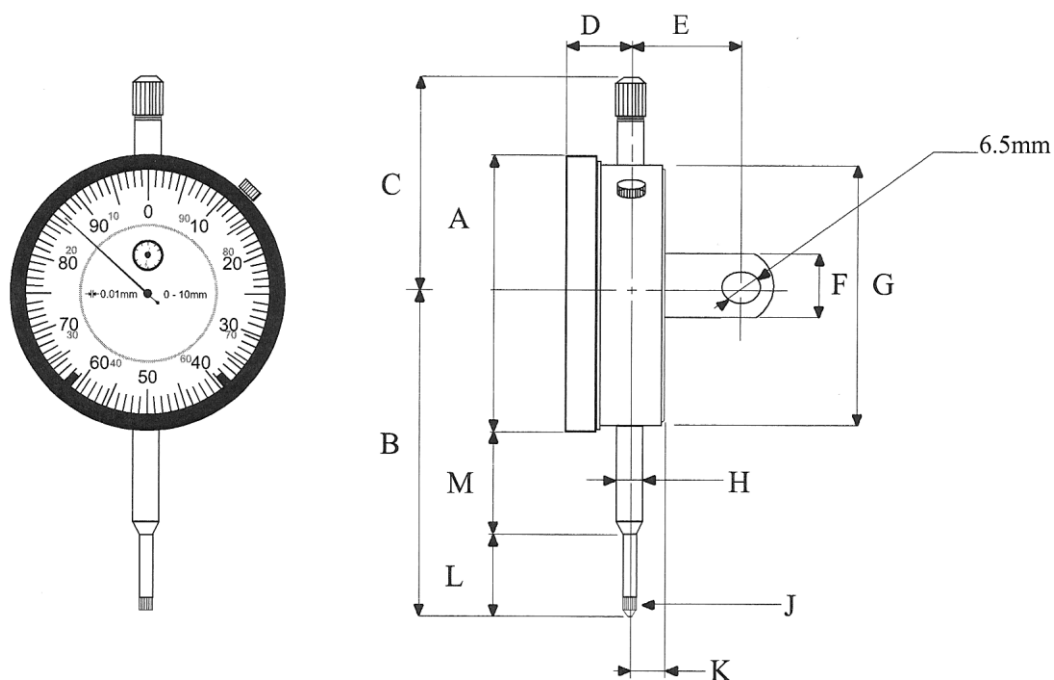

Dimensions: Metric Models

Code	A	B	C	D	E	F	G	H	J	K	L	M
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
DG-1MM	40							8.0	M2.5	6.3		
DG-5M	40	46.0	30.0	12.8	17.7	17.8	36.0	8.0	M2.5	6.3	12.5	13.5
DG-M	60	69.0	45.0	16.0	19.3	17.8	54.7	8.0	M2.5	8.0	20.0	18.0
DG-MB	60	69.0	45.0	16.0	19.3	17.8	54.7	8.0	M2.5	8.0	20.0	18.0
DG-MSP	60	84.0	45.0	16.0	19.3	17.8	54.7	8.0	M2.5	8.0	20.0	18.0
DG-25M	60	84.0	40.0	16.0	19.3	17.8	54.7	8.0	M2.5	8.0	36.3	18.0
DG-25MB	60	84.0	40.0	16.0	19.3	17.8	54.7	8.0	M2.5	8.0	36.3	18.0
DG-50M	76	130.0	48.0	16.4	23.2	17.8	71.0	8.0	M2.5	8.0	59.0	33.0
DG-100M								8.0	M2.5			

Dimensions: Inch Models

Code	A	B	C	D	E	F	G	H	J	K	L	M
	inch	inch	inch	inch	inch	inch	inch	mm	mm	inch	inch	inch
DG-1/4	1.58	1.92	1.19	0.53	0.69	0.7	1.41	8.0	M2.5	0.25	0.60	0.51
DG-1/2S	2.35	3.02	1.54	0.63	0.77	0.7	2.16	8.0	M2.5	0.32	1.08	0.73
DG-1/2SB	2.35	3.02	1.54	0.63	0.77	0.7	2.16	8.0	M2.5	0.32	1.08	0.73
DG-1S	2.35	3.36	1.52	0.63	0.77	0.7	2.16	8.0	M2.5	0.32	1.42	0.73
DG-1SB	2.35	3.36	1.52	0.63	0.77	0.7	2.16	8.0	M2.5	0.32	1.42	0.73
DG-2S	3.0	5.45	4.37	0.61		0.7		8.0	M2.5	0.32	2.28	1.68

Product: Plunger Dial Indicators for Articulated Holders FAT

Page 6 of 6

Accuracy Specifications: Metric

Range	Grads.	Total Revs.	Each 0.1mm	Each 0.5mm	Each 1.0mm	Each 2mm	Total Travel
mm	mm		mm	mm	mm	mm	mm
0-1	0.001	1					
0-5	0.01	5	0.005	0.008	0.01	0.015	0.016
0-10	0.01	10	0.005	0.008	0.01	0.015	0.020
0-25	0.01	25	0.005	0.008	0.01	0.015	0.030
0-50	0.01	50	0.01	0.015	0.02	0.025	0.045
0-100	0.01	100					

Accuracy Specifications: Inch

Range	Grads.	Total Revs.	Any 2 Revs.	First 10 Revs.	First 20 Revs.	Total Travel
inch	inch		inch	inch	inch	inch
1/4	0.001	2 1/2	0.001	N/A	N/A	0.0012
1/2	0.001	5	0.001	0.0015	N/A	0.0015
1	0.001	10	0.001	0.002	N/A	0.002
2	0.001	20	0.001	0.002	0.004	0.004