

Interchangeable Multi-Purpose Machine Centre Sets




Suitable for steadying a range of both male and female component centres

Sets supplied with 1 live Centre and a selection of 7 different interchangeable male and female cone centre configurations.

Supplied in a wooden case together with an extractor tool

Set	RC-20F	RC-30F
Morse Taper	MT-2	MT-3
Max. Rotating Speed	5000 rpm	4300 rpm

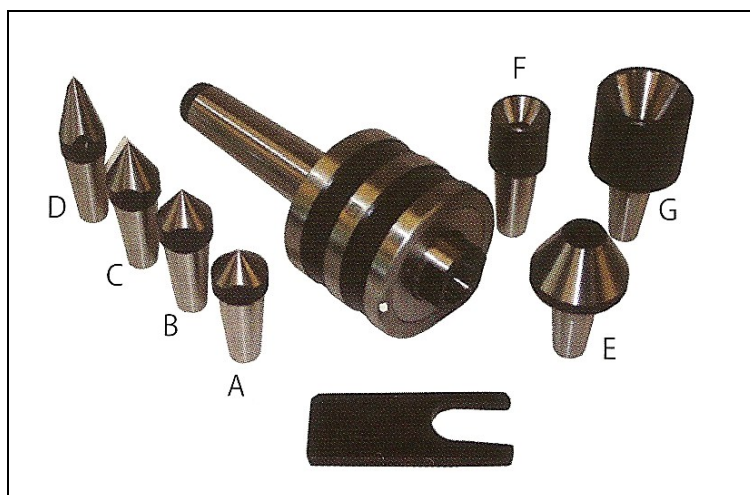

Hardness of Centres: HRC 58-62

Interchangeable Centre Details

Centre	Type	Angle	Max. Dia. mm RC-20F	Min. Dia. mm RC-20F	Max. Dia. mm RC-30F	Min Dia. mm RC-30F
A	Male	90	15.0	0	18.0	0
B	Male	75	15.0	0	18.0	0
C	Male	60	15.0	0	18.0	0
D	Male	60	15.0	0	18.0	0
E	Male	60	23.0	10.5	34.0	17.0
F	Female	60	9.0	5.0	17.0	10.5
G	Female	60	15.0	7.0	28.0	16.0

Packed Weight and Dimensions

Code	Shank	Weight g	W mm	H mm	L mm
RC-20F	MT-2	1104	105	65	185
RC-30F	MT-3	1916	140	76	220