

Packed Weight and Dimensions

Code	Description	Weight g	W mm	H mm	L mm
NG 3400	Heavy Duty Rotodrive	125	52	73	198


**Instructions**

Do not use heavy pressure when deburring as this will cause the blade to dig into the material and give an uneven finish  
 Use light and even pressure which will allow the blade and handle to work together to remove the burr and leave a smooth finish on the component

Blades should be handled carefully as they are sharp and can cut  
 Blades can break causing flying objects  
 Sharp edges and flying objects can cause injury  
 Users and bystanders should wear protective safety glasses  
 Do not pry or bend blades  
 Keep blades and sharp tools away from children  
 Do not regrind blades as this will weaken the blade and cause breakage and possible injury

All Noga products meet the strict requirements of ISO 9001 and ISO 14001

NG-3 Handle

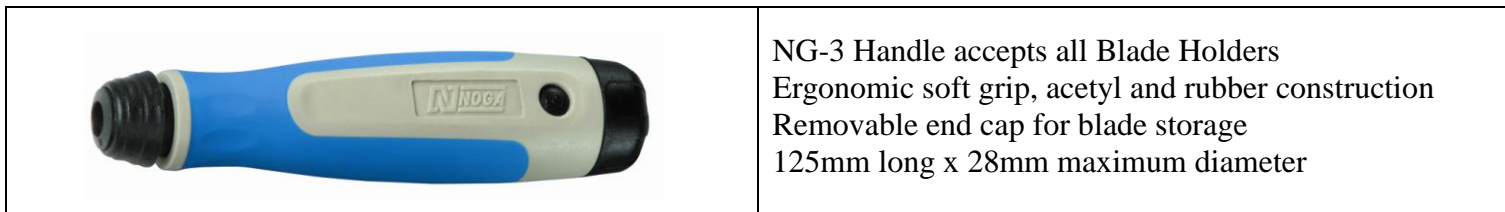


Packed Weight and Dimensions

Code	Description	Weight g	W mm	H mm	L mm
NG-3 Handle	NG3000	45	32	32	153

Heavy Duty Rotodrive

HD Rotodrive Holder

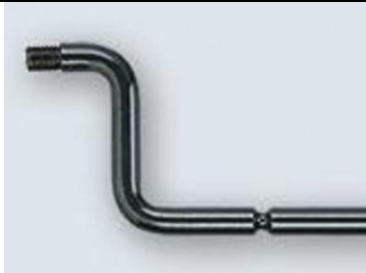	<p>Holds all "C" type Countersink Heads Used in NG-3 Handle M7 male thread for mounting Countersink Head</p>
---	--

Packed Weight and Dimensions

Code	Description	Weight g	W mm	H mm	L mm
EL 0802	HD Rotodrive Holder	45	65	35	95

C 20 Countersink Head

		<p>90° Countersink Head Range: 3-20mm diameter Blade material: HSS M2 Blade hardness: 62-64 HRC Attached to "C" Holder or HD Rotodrive Holder by M7 thread</p>
--	--	--

Packed Weight and Dimensions

Code	Description	Weight g	W mm	H mm	L mm
BC2011	C20 Countersink Head 3-20mm	28	61	25	130