



# iSCAN3 Features Overview

## iSCAN3 Hardware Features

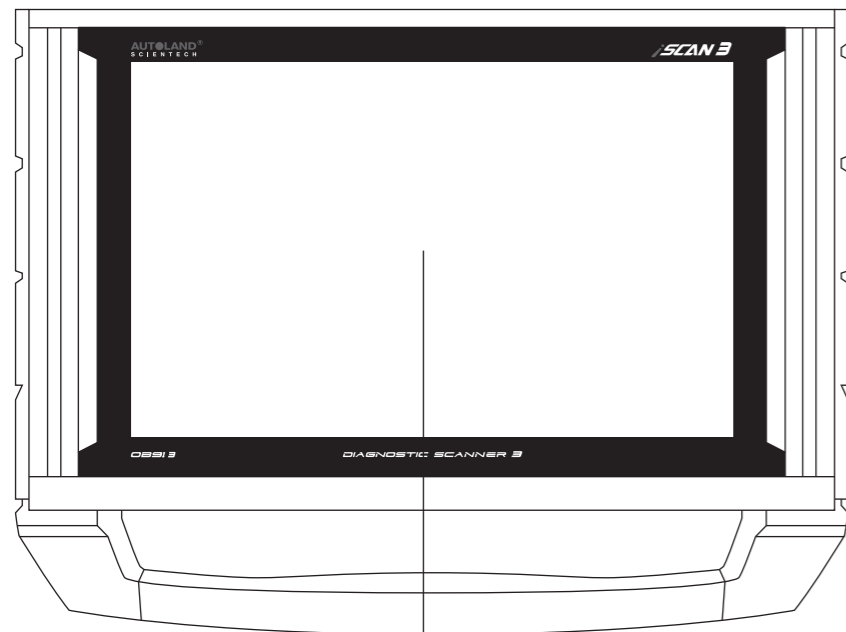


10.1 IPS Touch Screen

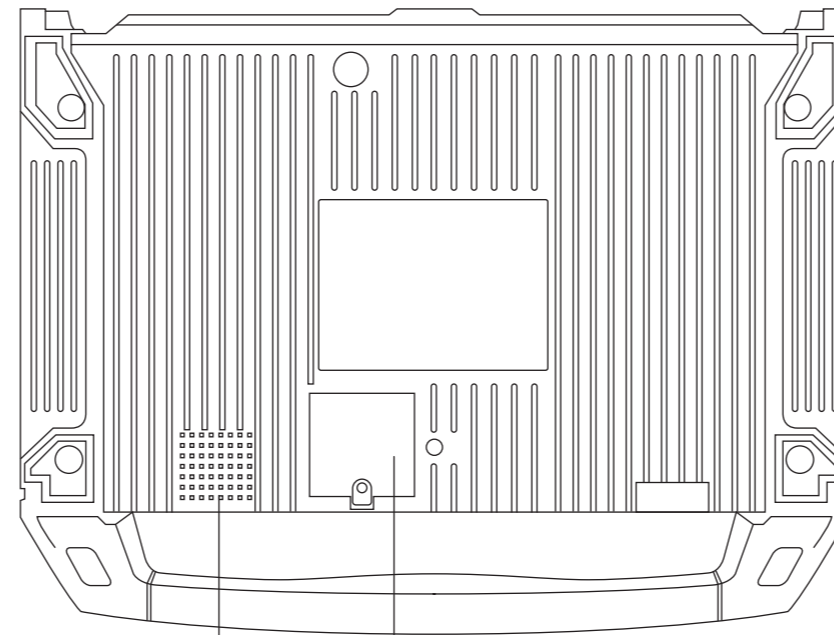


Speaker

CR2032 PCB Battery  
For Perpetual Calendar

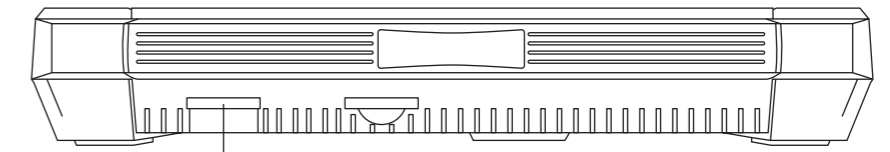

System File Storage

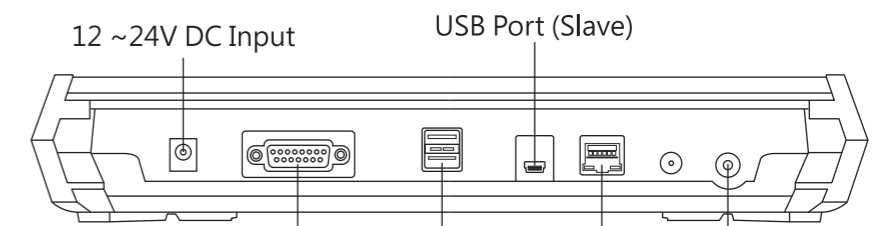

12 ~24V DC Input

USB Port (Slave)


15-PIN Diagnostic Adaptor

Reset Button

RJ45 Ethernet Cable (F)

USB Port x 2 (Master)

## iSCAN3 Basic Functions



### Vehicle Diagnostic

Package includes diagnostic, setting, programming and coding functions for Asian Cars, European Cars, US Cars, Supercars, and Trucks.



### J2534

Supports J2534 interface standards to work with vehicle OBDII systems.



### Support On Demand (SOD)

SOD offers capability for distributors or tech-support team to remotely utilizing licensed OEM software to perform diagnostic, programming, coding, or repair guide.



### Technical Hotline

Through remote control software, distributors or tech-support team can remotely operate iSCAN3 and perform necessary functions.



### Software Update

Connect iSCAN3 to Internet then select [Upgrade], system will detect if new software updates are available.



### Setting

For basic system setting and iSCAN3 system information.


**AUTOLAND**<sup>®</sup>  
S C I E N T E C H

# iSCAN3 Features Overview

## Software Download & Update

### Software Update

1. Select SET UP, then select WiFi connection.

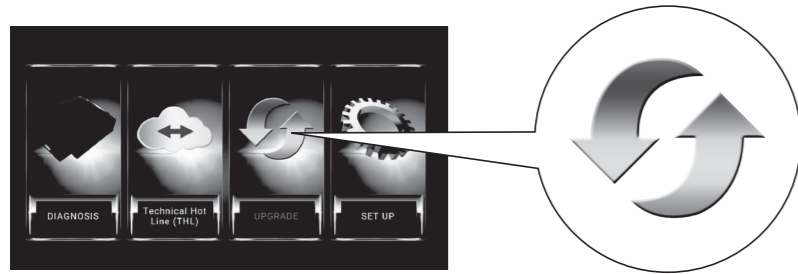


2. After Internet connection is complete, select UPGRADE at main page.



3. Entering Software Update, select [Update All] or select [Update] individually.

### Printing Function: Using Wifi Printer

1. Setup WiFi printer network connection. Please consult owner's manual for printer.
2. Connect iSCAN3 to the same network as the Wifi Printer.
  - ★ Please refer to iSCAN3 and printer owner's manual for detail.

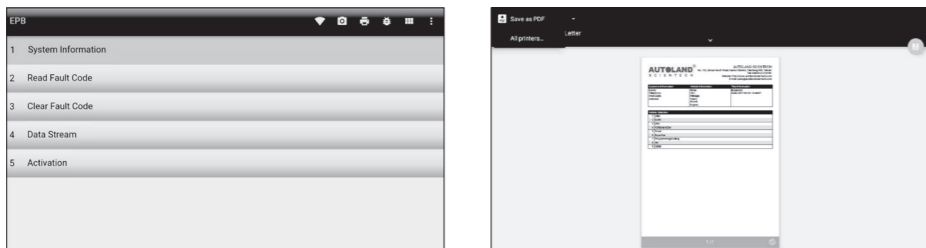


3. Click printer icon in tool bar on the top of screen.
4. Page preview on screen. Select designated printer from the top left selection area to perform printing.

## Fault Code Repair Guide

1. Click on the fault code, iSCAN3 will link the user to repair guide database. (Internet connection is required.)
2. Select [A Company] to review fault code related repair guide.
3. Repair guide.

## Quick Operational Guide

### Step 1 Locate Vehicle Diagnostic Connector

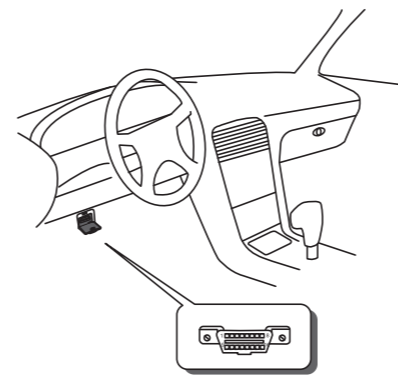


For most vehicles, OBDII connector is located by the driver's seat under the dashboard. Some models may have a lid covering the connector.

#### Attention:


1. Vehicles manufactured before year of 2000 may be equipped with different connector, or require different connector for different systems. Ex. Toyota before year of 2000 installed the non-OBDII connector under engine hood.
2. Please use correct diagnostic adaptor to connect with vehicle, otherwise connection may fail.

### Step 2 Select Diagnostic Adaptor

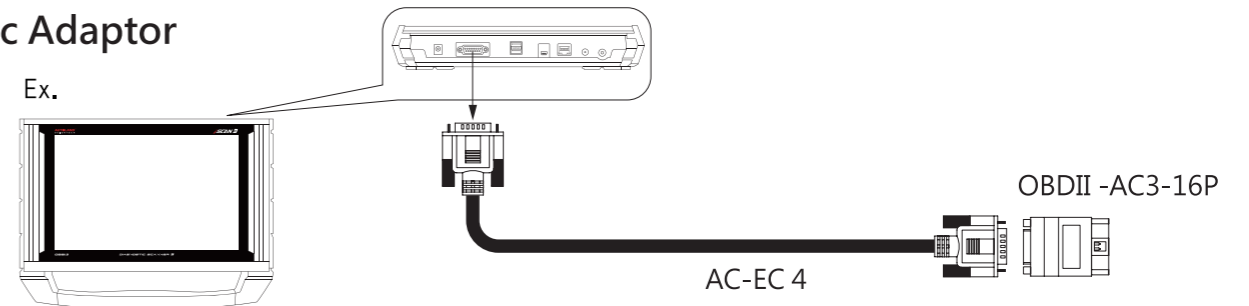

Please refer to Diagnostic Cable Connection Quick Manual for connection instructions by vehicle makes.

### Step 3 Diagnostic Connection

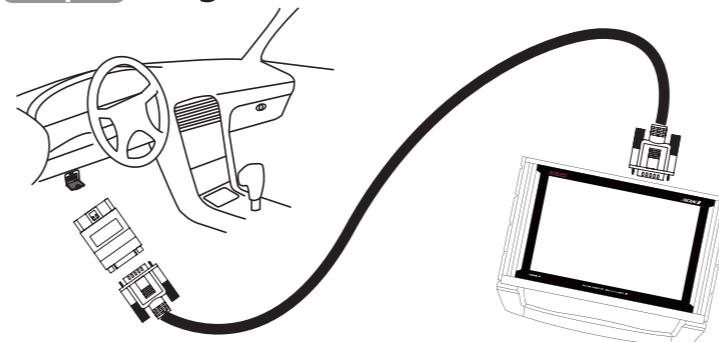

1. Connect iSCAN3 to vehicle connector via AC-EC4 and corresponding adaptor.
2. After iSCAN3 powered on and ready, select [Diagnosis], then select vehicle make



★ Image for illustration only. May differ from each user's iSCAN3 depending on the software package purchased.