



DEEP ROOF LIGHTING INC.

55 Sae Cliff Avenue, Glen Cove, NY 11542

Tel: 516-676-9100, -9101, -9103, -9105, -9106

Fax: 516-676-9101

Web Site: www.deeprooflighting.com

Email: deeproof@aol.com deeproofgg@gmail.com cs.deeproof@gmail.com

LED Ceiling Flush Mount Lights - UL, ES

◀ Twin Rings ▶



- Cold rolled steel plate and rings
- Blowing mode high quality PMMA material
- Efficient heat dissipating Aluminum pillars
- 10", 14" and 18" LED bulge ceiling Lights
- CRI 85 high performance LED chips
- Dimmable
- UL, ULc, Energy star

10" - $\Phi 250 \times 70$ mm

14" - $\Phi 360 \times 95$ mm

18" - $\Phi 460 \times 120$ mm

3CCT Adjustable



3000K



4000K



5000K



Item Codes

LCM1-R1014-D(30/40/50)SN(-B)

LCM1-R1015-D3CC-SN-WD

LCM1-R1422-D(30/40/50)-SN

LCM1-R1427-D(30/40/50)SN-B

LCM1-R1425-D3CC-SN-WD

LCM1-R1830-D(30/40/50)SN(-B)

10", 14 W, 1010 lumen, 120 VAC, Dimm, Single 3/4/5000K, Brush Nickel

10", 15 W, 1100 lumen, 120 VAC, Dimm, 3,4,5000K switchable, Bsh Nickl

14", 22 W, 1550 lumen, 120 VAC, Dimm, Single 3/4/5000 K, Brush Nickel

14", 27 W, 2100 lumen, 120 VAC, Dimm, Single 3/4/5000 K, Bsh Nickl

14", 25 W, 1900 lumen, 120 VAC, Dimm, 3,4,5000 K switchable, Bsh Nickl

18", 30 W, 2400 lumen, 120 VAC, Dimm, Single 3/4/5000 K, Brush Nickel

• Emergency pack cover



AA: Small Pin Cross
Machine Screws (2)
8#-32UNC-2A-L2.36



Item Codes

LCM1-R10-EMC

LCM1-R14-EMC

LCM1-R18-EMC

Cover for 10" twin ring

Cover for 14" twin ring

Cover for 18" twin ring

◀ Mushroom ▶



- Cold forging metal plate
- Blowing mode high quality PMMA material
- 12" and 16" LED bulge ceiling Lights
- CRI 85 high performance LED chips
- Dimmable
- UL, ULc, Energy star

12" - Φ300x80 mm

16" - Φ400x116 mm

Item Codes

LCM1-M1115-D(30/40/50)W-CN	11", 15 W, 1100 lumen, 120 VAC, Dimmable, Single 3/4/5000 K, White
LCM1-M1214-D(30/40/50)W	12", 14 W, 1010 lumen, 120 VAC, Dimmable, Single 3/4/5000 K, White
LCM1-M1520-D(30/40/50)W-CN	15", 20 W, 1500 lumen, 120 VAC, Dimmable, Single 3/4/5000 K, White
LCM1-M1622-D(30/40/50)W	16", 22 W, 1550 lumen, 120 VAC, Dimmable, Single 3/4/5000 K, White

*** HOLD ***

◀ Mushroom and Metal Form ▶

• Go Series •



- Cold forging metal plate
- Blowing mode high quality PMMA material
- 11" and 14" LED bulge ceiling Lights
- CRI 85 high performance LED chips
- Dimmable
- ETL, ETLc, Energy star, T24
- DOB Driver on board technology



11" - Φ11" X 3.7"

14" - Φ14" X 4.5"

Item Codes

LCM1-M1116-D30W-G	11", 16 W, 1000 lumen, 120 VAC, Dimmable, 3000 K
LCM1-M1116-D40W-G	11", 16 W, 1100 lumen, 120 VAC, Dimmable, 4000 K
LCM1-M1116-D50W-G	11", 16 W, 1100 lumen, 120 VAC, Dimmable, 5000 K
LCM1-M1425-D30W-G	14", 25 W, 1500 lumen, 120 VAC, Dimmable, 3000 K
LCM1-M1425-D40W-G	14", 25 W, 1600 lumen, 120 VAC, Dimmable, 4000 K
LCM1-M1425-D50W-G	14", 25 W, 1600 lumen, 120 VAC, Dimmable, 5000 K
LCM1-MM1324-D30W-G	Metal Form 13", 24 W, 1300 lumen, 120 VAC, Dimmable, 3000 K
LCM1-MM1324-D40W-G	Metal Form 13", 24 W, 1400 lumen, 120 VAC, Dimmable, 4000 K
LCM1-MM1324-D50W-G	Metal Form 13", 24 W, 1400 lumen, 120 VAC, Dimmable, 5000 K

◀ Drum ▶



- Cold forging metal plate
- Blowing mode high quality PMMA material
- 12" and 16" LED bulge ceiling Lights
- CRI 85 high performance LED chips
- Dimmable
- UL, ULc, Energy star

12" - Φ300x80 mm

16" - Φ400x90 mm

Item Codes

LCM1-D1115-D(30/40/50)W-CN	11", 15 W, 1100 lumen, 120 VAC, Dimmable, Single 3/4/5000 K, White
LCM1-D1214-D(30/40/50)W	12", 14 W, 1010 lumen, 120 VAC, Dimmable, Single 3/4/5000 K, White
LCM1-D1520-D(30/40/50)W-CN	15", 20 W, 1500 lumen, 120 VAC, Dimmable, Single 3/4/5000 K, White
LCM1-D1622-D(30/40/50)W	16", 22 W, 1550 lumen, 120 VAC, Dimmable, Single 3/4/5000 K, White

*** HOLD ***

◀ Square ▶



• Go Series •

- Cold forging metal plate
- Blowing mode high quality PMMA material
- 11" and 13" LED bulge ceiling Lights
- CRI 85 high performance LED chips
- Dimmable
- ETL, ETLc, Energy star, T24
- DOB Driver on board technology

11" - 11"X 11" X 3.4"

13" - 13" X 13" X 3.4"



Item Codes

LCM1-Q1116-D30W-G	11", 16 W, 1000 lumen, 120 VAC, Dimmable, 3000 K
LCM1-Q1116-D40W-G	11", 16 W, 1100 lumen, 120 VAC, Dimmable, 4000 K
LCM1-Q1116-D50W-G	11", 16 W, 1100 lumen, 120 VAC, Dimmable, 5000 K
LCM1-Q1325-D30W-G	13", 25 W, 1500 lumen, 120 VAC, Dimmable, 3000 K
LCM1-Q1325-D40W-G	13", 25 W, 1600 lumen, 120 VAC, Dimmable, 4000 K
LCM1-Q1325-D50W-G	13", 25 W, 1600 lumen, 120 VAC, Dimmable, 5000 K

◀ Trust ▶ Disk lights ceiling mount • Input voltage 120 VAC

7.5" Diam,. 15 watts, 1100 lumen

- Cold forging Aluminum plate
- Injection mode high quality PC material
- 7.5" LED Disk ceiling Lights
- CRI 85 high performance LED chips
- Color white and brush nickel selection
- Dimmable
- ETL, Energy star

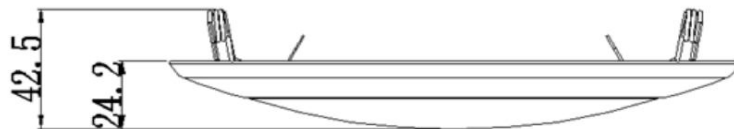


•Connect the house white wire to the mounting plate (Part A) white wire using the wire nut (BB).
NOTE: For proper connection, place the wire nuts (BB) over wires and twist clockwise until tight.(Figure 3)
OPTIONAL: Wrap connected wire nuts with electrical tape.

Mounting to 4" and 6" J-box



Figure 4



3. ATTACHING THE MOUNTING PLATE

- Attach the mounting plate to the junction box by aligning the holes on the mounting plate (Part A) with the screws on the junction box.
- Turn mounting plate clockwise to lock in place and tighten screws to ensure the fixture is secure and will not move.(Figure 4)




Figure 5

4. ATTACHING THE LAMP SHADE


Reattach lamp shade to mounting plate and twist to lock in place.(Figure 5)

Item Codes

LCM1-T0815-D30W-B
LCM1-T0815-D40W-B
LCM1-T0815-D50W-B
LCM1-T0815-D30SN-B
LCM1-T0815-D40SN-B
LCM1-T0815-D50SN-B

White 7.5" Disk, 15W, 1100 Lumen, 3000K, Triac Dimm
White 7.5" Disk, 15W, 1100 Lumen, 4000K, Triac Dimm
White 7.5" Disk, 15W, 1100 Lumen, 5000K, Triac Dimm
Satin Nickel 7.5" Disk, 15W, 1100 Lumen, 3000K, Triac Dimm
Satin Nickel 7.5" Disk, 15W, 1100 Lumen, 4000K, Triac Dimm
Satin Nickel 7.5" Disk, 15W, 1100 Lumen, 5000K, Triac Dimm

◀ Soldier ▶

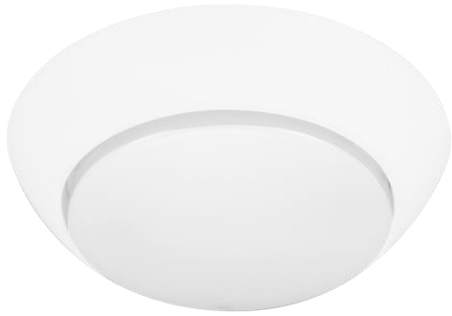

7" - Φ 185x100 mm

- Cold forging metal plate
- Injection mode high quality PC material
- 7" LED bulge ceiling Lights
- CRI 85 high performance LED chips
- Color white and brush nickel selection
- Dimmable
- UL, ULc, Energy star



Item Codes

LCM1-S0710-D30W
LCM1-S0710-D40W
LCM1-S0710-D30SN
LCM1-S0710-D40SN

7", 10 W,	700 lumen,	120 VAC,	Dimmable,	3000 K,	white
7", 10 W,	700 lumen,	120 VAC,	Dimmable,	4000 K,	white
7", 10 W,	700 lumen,	120 VAC,	Dimmable,	3000 K,	Brush Nickel
7", 10 W,	700 lumen,	120 VAC,	Dimmable,	4000 K,	Brush Nickel