

Down Light High Power

DL/HP

DESCRIPTION

The Down Light High Power luminaire has a fixed head to give a dramatic one way, wash-lighting effect on walls. It can be mounted with the lamp directed upwards or downwards and is suitable for mounting onto timber, masonry or stone. This luminaire is water resistant, complete with a mounting base and stainless steel screws. All Hunza High Power products have an extra powdercoat layer to ensure maximum corrosion protection.

| PURE LED | |
|------------------------|--|
| LED Chip | Cree CXA1512 Plug and Play, field replaceable PCB boards, 18Vf |
| Output | 1200 lumens @ 700mA max |
| Lumens Per Watt | 100lm/W |
| Power Consumption | 12.6 watts |
| Colour Temperature | 2700K, 3000K and 4000K |
| CRI Warm White (3000K) | 85+, 90+ (optional) |
| Beam Angle | 15, 25, 38, 60 degrees |

*Specification for pureled only, there are no other alternative lamp sources for this fixture.

PHYSICAL PROPERTIES

| | |
|--------------------|--|
| Materials | Powdercoated Aluminium |
| Ingress Protection | IP66 |
| Standards | AS/NZS 61046, UL 1598, CSA C22.2 No. 250.0 |


POWER SUPPLY OPTIONS

DRIVER REQ FOR SERIES WIRED (CC FORMAT) ** I DRIVER REQ FOR PARALLEL WIRED (CV FORMAT)***
NO DRIVER REQ FOR RETRO 'R' (INTEGRAL 230V IN)

** See pages 2,6-7,9 power supplies

*** See pages 10 power supplies

CATEGORY
WALL MOUNT

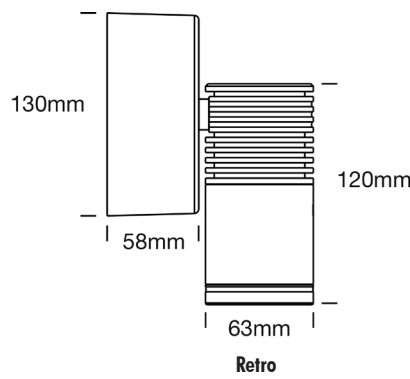

PRODUCT CONFIGURATION

LUMINAIRE

DL/HP

POWER

/L/S

700mA INPUT (CC) SERIES WIRED

/L/D10

6W, 12VAC INPUT (CV) PARALLEL WIRED

/L/R

RETRO, 110/240V DRIVER

BEAM

15

30

40

COLOUR

15°

30°

40°

ACCESSORIES

2

3

4

39

2700K

3000K

4000K

3000K,90+ CRI

HCL

SNT

GG

FL

CIK

HEX CELL LOUVRE

SNOOT

GLARE GUARD

FROSTED LENS

CABLE JOINT KIT

MATERIAL/ FINISH

BK

BZ

OGR

WH

WB

DG

STAR

CT

ALUMINIUM

BLACK

BRONZE

OLIVE GREEN

WHITE

WHITE BIRCH

DARK GREY

SILVER STAR

CORTEN

/L/S PURELED SERIES WIRED,
Remote constant current driver required.
Individual fixtures require:
18VDC@700mA, 700mA maximum

/L/D PURELED PARALLEL WIRED,
Remote 240VAC - 12VAC transformer required. Hunza integrated plug and play driver included.
Input: 9-15VAC.
Output: 18VDC @700mA,

/L/R PURELED 110/240VAC RETRO DRIVER
Input: 110-240VAC, 14 watt total (driver included)
Output: 18VDC, 700mA
0-10 volt dimming