

# Ceiling Mount ULTRA

CMU

## DESCRIPTION

The Ultra Ceiling Mount has been designed to be mounted on horizontal ceiling surfaces. It is a fixed light with no tilt, used for direct lighting. It features an extra clear, tempered, flush, low iron glass lens and high temperature silicon gaskets. All Hunza products have an extra layer of powdercoat to ensure maximum corrosion protection.




| PURE LED               |   |
|------------------------|---|
| LED Chip               | Cree CXA 2540 Plug and Play, field replaceable PCB boards, 37Vf |
| Output                 | 5000 lumens @ 1400mA max  |
| Lumens Per Watt        | 90 lm/W   |
| Power Consumption      | 52 watts  |
| Colour Temperature     | 2700K, 3000K and 4000K  |
| CRI Warm White (3000K) | 80 standard, 90+ optional                                       |
| Beam Angle             | 13, 22, 33, 51 Degrees  |


| PHYSICAL PROPERTIES |                             |
|---------------------|-----------------------------|
| Materials           | Powdercoated Aluminium      |
| Ingress Protection  | IP66+                       |
| Impact Resistance   | IK10                        |
| Standards           | BS/EN 60598.2.2, UL1598, CE |

| POWER SUPPLY OPTIONS  |  |
|---|--|
| NO DRIVER REQ FOR RETRO 'R' ( INTEGRAL 230V IN )   DRIVER REQ FOR SERIES WIRED ( CC FORMAT ) ** |  |

\*\* Contact sales office



CATEGORY  
ARCHITECTURAL ULTRA RANGE

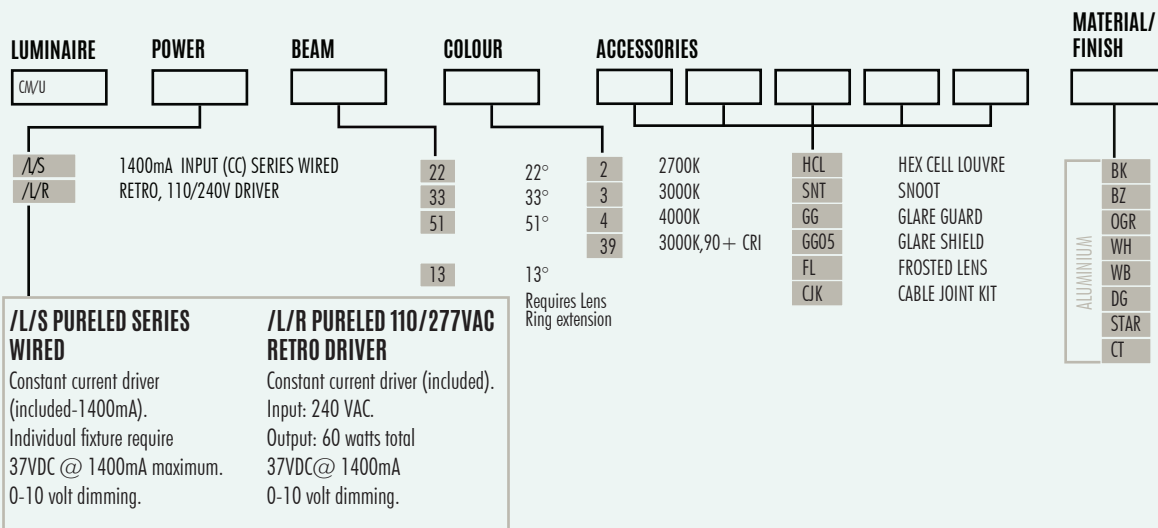

PRODUCT CONFIGURATION