

Pagoda Pagoda Light

PGL/PGL

DESCRIPTION

The Pagoda Pagoda Light fixture provides non-directional lighting, ideal for illumination of areas such as porches or entrance ways. The lens reflects light at two angles, horizontally and upwards, to illuminate surrounding landscape.



CATEGORY
WALL MOUNT

PURE LED

| | |
|------------------------|---|
| LED Chip | Cree XHP-50-2 Plug and Play, field replaceable LED board, 2x6Vf |
| Output | 2x510 lumens @ 1050mA max |
| Lumens Per Watt | 85lm/W |
| Power Consumption | 12 watts @1050mA |
| Colour Temperature | 2700K, 3000K and 4000K |
| CRI Warm White (3000K) | 90 standard |
| Beam Angle | 360 degrees |

*Specification for pureled only for retrofit lamp options please see alternative lamps page.

PHYSICAL PROPERTIES


| | |
|--------------------|--|
| Materials | Powdercoated Aluminium, Solid Copper or 316 Stainless Steel |
| Ingress Protection | IP66 |
| Standards | AS/NZS 61046, EN60598, UL 1838, 2108, 1598, CSA C22.2 No. 250.7, 250.0-08, 250.0, CE |

POWER SUPPLY OPTIONS

DRIVER REQ FOR SERIES WIRED (CC FORMAT) ** | TRANSFORMER REQ FOR PARALLEL WIRED (CV FORMAT)***
NO DRIVER REQ FOR RETRO 'R' (INTEGRAL 230V IN) | NO DRIVER REQ FOR GU10

** See pages 3-5,7,9 power supplies

*** See pages 11-12 power supplies

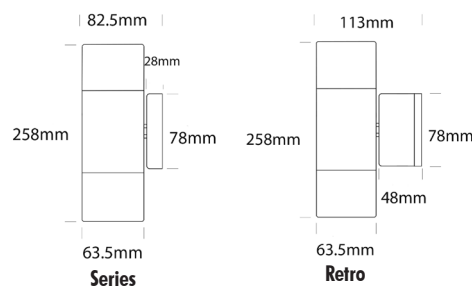

PRODUCT CONFIGURATION

| LUMINAIRE | POWER | BEAM | COLOUR | ACCESSORIES | MATERIAL/ FINISH |
|---|--|---|--------|--|---------------------|
| PGL/PGL | | | | | |
| /L/S | 1050mA INPUT (CC) SERIES WIRED | 360 | 360° | 2 | BOLOP |
| /L/D3 | 2x2W, 12VAC INPUT (CV) PARALLEL WIRED | | | 3 | CIK |
| /L/D7 | 2x4W, 12VAC INPUT (CV) PARALLEL WIRED | | | 4 | OPAQUE LENS |
| /L/D10 | 2x6W, 12VAC INPUT (CV) PARALLEL WIRED | | | | CABLE JOINT KIT |
| /L/R | 2x4W, RETRO, 110/240V DRIVER | | | | |
| MR16 | 2x12V 5W RETROFIT LAMP | | | | |
| MR16/R | 2x5W RETROFIT LAMP with integral 230V Driver | | | | |
| GU10 | 2x7W SORAA RETROFIT LAMP 230V | | | | |
| /L/S PURELED SERIES WIRED Remote constant current driver required. Individual fixtures require: 2x 6VDC@1050mA, 1050mA maximum | | /L/D PURELED PARALLEL WIRED Remote 240VAC - 12VAC transformer required. Hunza integrated plug and play driver included. Input:9-15VAC. Output: 6VDC @ D3=350mA, D7=700mA, D10=1050mA | | /L/R PURELED 110/240VAC RETRO DRIVER Input: 110/240VAC, 12 Watt max (included) Output: 1-18VDC, 700mA | |
| ALUMINIUM BK BLACK BZ BRONZE OGR OLIVE GREEN WH WHITE WB WHITE BIRCH DG DARK GREY STAR SILVER STAR CT CORTEN COP SOLID COPPER SS STAINLESS STEEL | | | | | |