

Step Light Solid Eyelid Square

SLSSQ

DESCRIPTION

The Step Light Solid Eyelid Square is designed with Clean fixing free 88mm Square flange and recessed body for flush mounting into masonry, stone or wood, providing illumination of steps and low level features such as exterior paved areas. The Eyelid feature eliminates all upward light, providing an excellent glare-free illuminating effect. The Step light Canister for installation is included with the fitting.

Alternatively, screw holes in the flange are available when requested. This alternative mounting can be used when direct fix mounting into wooden decking

PURE LED

LED Chip	Cree XHP-50-2 Plug and Play, field replaceable LED board, 6Vf
Output	600 lumens @ 1050mA Max
Lumens Per Watt	100lm/W
Power Consumption	6 Watts @1050mA
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	90 standard
Beam Angle	15, 25, 38, 60 degrees

*Specification for pureled only for retrofit lamp options please see alternative lamps page.

PHYSICAL PROPERTIES

Materials	Powdercoated Aluminium, Solid Copper or 316 Stainless Steel
Ingress Protection	IP66
Standards	AS/NZS 61046, UL1838, CSA C22.2 No. 250.7


POWER SUPPLY OPTIONS

DRIVER REQ FOR SERIES WIRED (CC FORMAT) ** | TRANSFORMER REQ FOR PARALLEL WIRED (CV FORMAT) ***
NO DRIVER REQ FOR GU10

** See pages 3-5,7,9 power supplies

*** See pages 11-12 power supplies

CATEGORY
STEP

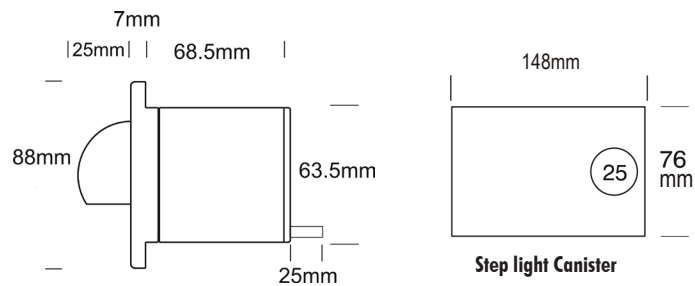

PRODUCT CONFIGURATION

LUMINAIRE	POWER	BEAM	COLOUR	ACCESSORIES	MATERIAL/ FINISH	
SLSSQ						
/L/S	1050mA INPUT (CC) SERIES WIRED	15	15°	2	HCL	BK
/L/D3	2W, 12VAC INPUT (CV) PARALLEL WIRED	25	25°	3	FL	BZ
/L/D7	4W, 12VAC INPUT (CV) PARALLEL WIRED	38	38°	4	CJK	OGR
/L/D10	6W, 12VAC INPUT (CV) PARALLEL WIRED	60	60°		TLTM	WH
MR16	12V 5W RETROFIT LAMP				DKCAN	WB
GU10	7W SORAA RETROFIT LAMP 230V				SLCAN	DG
					CANSS	STAR
						CT
						COP
						SS

/L/S PURELED SERIES WIRED
Remote constant current driver required.
Individual fixtures require:
6VDC@1050mA,
1050mA maximum

/L/D PURELED PARALLEL WIRED
Remote 240VAC - 12V AC transformer required.
Hunza integrated plug and play driver included.
Input: 9-15VAC.
Output: 6VDC @ D3=350mA,
D7=700mA, D10=1050mA

MATERIAL/ FINISH
 BK BLACK
 BZ BRONZE
 OGR OLIVE GREEN
 WH WHITE
 WB WHITE BIRCH
 DG DARK GREY
 STAR SILVER STAR
 CT CORTEN
 COP SOLID COPPER
 SS STAINLESS STEEL