

Twin Wall Spot

TWS

DESCRIPTION

The Twin Wall Spot has been designed to be mounted on walls and provide directional light for pathways and structural elements of a building. The luminaire has two individual, fully adjustable spotlights which can be aimed in two entirely different directions, allowing 360 degree rotation and 0-90 degree elevation.



PURE LED

LED Chip	Cree XHP-50-2 Plug and Play, field replaceable LED board, 2x6Vf
Output	2x600 lumens @ 1050mA max
Lumens Per Watt	100lm/W
Power Consumption	12 watts @1050mA
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	90 standard
Beam Angle	15, 25, 38, 60 degrees

*Specification for pureled only for retrofit lamp options please see alternative lamps page.

PHYSICAL PROPERTIES

Materials	Powdercoated Aluminium, Solid Copper or 316 Stainless Steel
Ingress Protection	IP66
Standards	CE, EN60598, AS/NZS 61046, UL 1838, CSA C22.2 No. 250.7


POWER SUPPLY OPTIONS

DRIVER REQ FOR SERIES WIRED (CC FORMAT) ** | TRANSFORMER REQ FOR PARALLEL WIRED (CV FORMAT)***
NO DRIVER REQ FOR RETRO 'R' (INTEGRAL 230V IN) | NO DRIVER REQ FOR GU10

** See pages 3-5,7,9 power supplies

*** See pages 11-12 power supplies

CATEGORY
WALL MOUNT

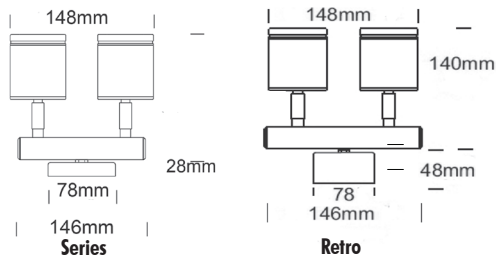

PRODUCT CONFIGURATION

LUMINAIRE	POWER	BEAM	COLOUR	ACCESSORIES	MATERIAL/ FINISH
TWS					
/L/S	1050mA INPUT (CC) SERIES WIRED	15	15°	2	2700K
/L/D3	2x2W, 12VAC INPUT (CV) PARALLEL WIRED	25	25°	3	3000K
/L/D7	2x4W, 12VAC INPUT (CV) PARALLEL WIRED	38	38°	4	4000K
/L/D10	2x6W, 12VAC INPUT (CV) PARALLEL WIRED	60	60°		
/L/R	2x4W, RETRO, 110-240V DRIVER				
MR16	2x12V 5W RETROFIT LAMP				
MR16/R	2x5W RETROFIT LAMP with integral 230V Driver				
GU10	2x7W SORAA RETROFIT LAMP 230V				
/L/S PURELED SERIES WIRED Remote constant current driver required. Individual fixtures require: 12VDC@1050mA, 1050mA maximum		/L/D PURELED PARALLEL WIRED Remote 240VAC-12VAC transformer required. Hunza integrated plug and play (included) driver included. Input: 9-15VAC. Output: 6VDC @ D3=350mA, D7=700mA, D10=1050mA		/L/R PURELED 110/240VAC RETRO DRIVER Input: 110/240VAC, 12 Watt max required. Hunza integrated plug and play (included) Output: 1-18VDC, 700mA	
				HCL HEX CELL LOUVRE SNT SNOOT GG GLARE GUARD FL FROSTED LENS LKN LOCKING KNUCKLE CJK CABLE JOINT KIT	BK BLACK BZ BRONZE OGR OLIVE GREEN WH WHITE WB WHITE BIRCH DG DARK GREY STAR SILVER STAR CT CORTEN COP SOLID COPPER SS STAINLESS STEEL