


Tier Light

TL

DESCRIPTION

The Tier Light is designed for illuminating medium level foliage. It provides 360 degree illumination on a horizontal plane and does not project any vertical light. The luminaire is mounted onto a 700mm pole to provide a soft pool of light suitable for a wide variety of landscape situations.

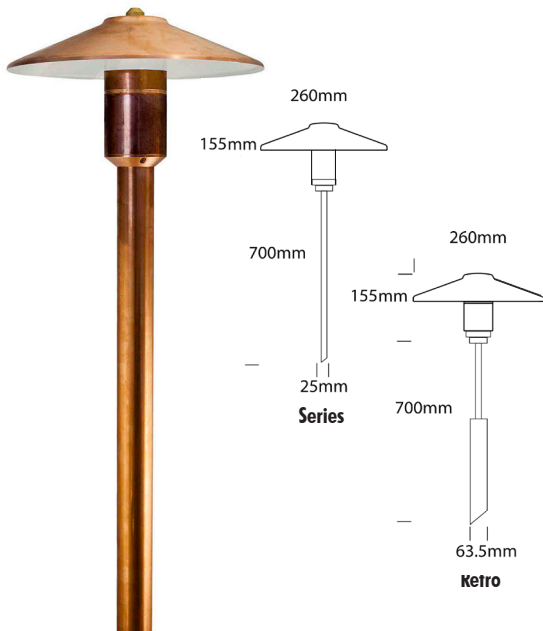

PURE LED

LED Chip	Cree XHP-50-2 Plug and Play, field replaceable LED board, 6Vf
Output	510 lumens @ 1050mA max
Lumens Per Watt	85lm/W
Power Consumption	6 watts @1050mA
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	90 standard
Beam Angle	15, 25, 38, 60 degrees

*Specification for pureled only, for retrofit lamp options please see alternative lamps page.

PHYSICAL PROPERTIES

Materials	Powdercoated Aluminium, Solid Copper or 316 Stainless Steel
Ingress Protection	IP56/IP66
Standards	As/NZS 61046, UL1838, CSA C22.2 No. 250.7


POWER SUPPLY OPTIONS

DRIVER REQ FOR SERIES WIRED (CC FORMAT) ** | TRANSFORMER REQ FOR PARALLEL WIRED (CV FORMAT)***
 NO DRIVER REQ FOR RETRO 'R' (INTEGRAL 230V IN) | NO DRIVER REQ FOR GU10

** See pages 3-5,7,9 power supplies

*** See pages 11-12 power supplies

CATEGORY
POLE MOUNTED

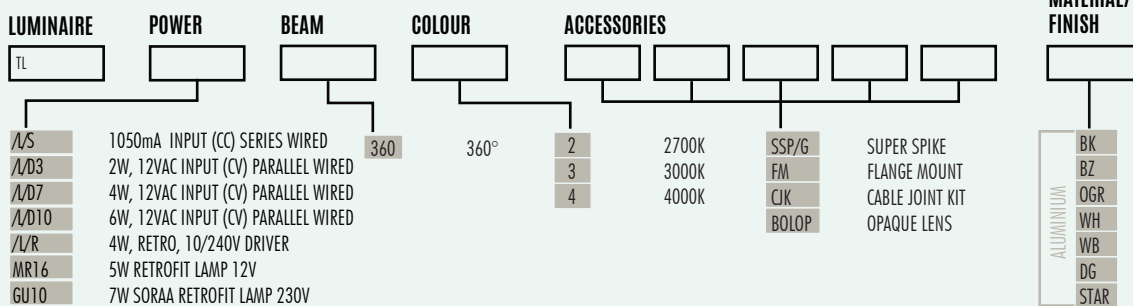

/L/S PURELED SERIES WIRED

Remote constant current driver required.
 Individual fixtures require:
 6VDC@1050mA,
 1050mA maximum

/L/D PURELED PARALLEL WIRED

Remote 240VAC - 12V AC transformer required. Hunza integrated plug and play driver included.
 Input: 9-15VAC.
 Output: 6VDC @ D3=350mA,
 D7=700mA, D10=1050mA

/L/R PURELED 110/240VAC RETRO DRIVER

Input: 110/240VAC, 12 Watt max (included)
 Output: 1-18VDC, 700mA

MATERIAL/ FINISH

ALUMINIUM	BK	BLACK
	BZ	BRONZE
	OGR	OLIVE GREEN
	WH	WHITE
	WB	WHITE BIRCH
	DG	DARK GREY
	STAR	SILVER STAR
	COP	SOLID COPPER
	SS	STAINLESS STEEL

PRODUCT CONFIGURATION