


PROJECT:
TYPE:
SOURCE:
NOTES:

### SPECIFICATIONS

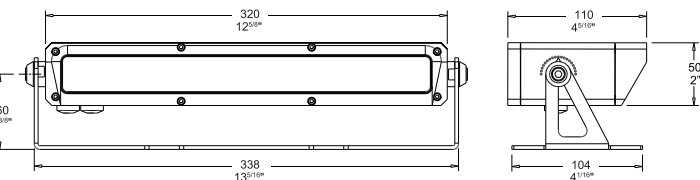

LED Chip	Cree XPG-3 X 12 replaceable linear board
Luminaire Output	2300 Lumens @ 700mA (26 watts), Delivered from Luminaire with 3000K unobstructed beam.
Lumens Per Watt	85 Lumens minimum @ 26 watts, Delivered from Luminaire with 3000K unobstructed beam
CRI (3000K)	90+ Standard
Colour Temperatures	2700K, 3000K, 4000K, Blue, Amber
Beam Angles	15, 30, 60, 35x15
Ingress Protection	IP68 <i>*not for use in pool or ponds</i>
Warranty	Electronics = 5 years Body Aluminium = 5 years
Standards	BS/EN 60598.2.2 cUL 1598, 2108 PENDING CE

### PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Cat. No. BLD/L

Luminaire	Power	Material/ Finish	Beam	Colour	Accessories
BLD/L					
SR SERIES REMOTE		EBK BLACK	15 15°	2 2700K	FL FROSTED LENS
D24 24vdc INPUT		EBZ BRONZE	30 30°	3 3000K	CJK CABLE JOINT KIT
		EOGR OLIVE GREEN	60 60°	4 4000K	
		EWB WHITE	OVAL 35x15°	A AMBER	
		EDG DARK GREY		B BLUE	
		ESTAR SILVER STAR			
		ECT CORTEN			

#### SERIES REMOTE:

Constant current driver  
(included)  
Fixture requires 37vdc @  
700mA maximum

#### 24vdc DRIVER:

Constant current driver  
(included)  
Fixture requires 24vdc constant  
voltage

ADDITIONAL COMMENTS:

# LUMINAIRE CONSTRUCTION

## CNC machined from one of the following metals:

Body - solid high corrosion resistant 50 x 75mm (2 x 3") aluminium bar.

Finished with chromate substrate, Epoxy layer and a UV resistant polyester powder coat colour.

Fixings and Brackets - made from 316 Stainless Steel

## Step Lens:

10mm (3/8") Extra clear, low iron, shatter resistant glass.

Lifetime warranty

## Gaskets:

Silicone, iron impregnated 220°C (428°F)

## Cable:

Water resistant rubber

## Mounting:

The mounting bracket is fixed to the surface using stainless screws.

## Luminaire Weight:

4kg (9 lbs)

## Colours:


Black, Bronze, Silver Star, White, Birch, Olive Green, Dark Grey, Corten.

## ACCESSORIES


## BEAM ANGLES

High efficiency Optics. Field replaceable


IES files available for download: [www.hunzalighting.com/download.php](http://www.hunzalighting.com/download.php)

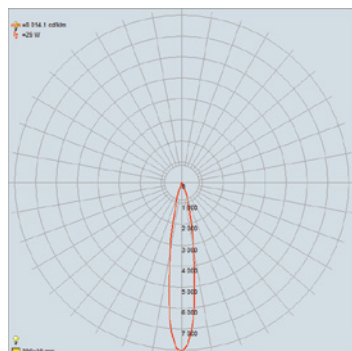


15° FWHM  
OPTIC

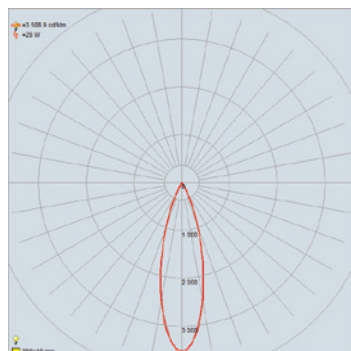

30° FWHM  
OPTIC

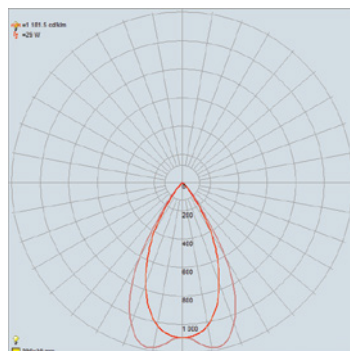


60° FWHM BATWING  
OPTIC

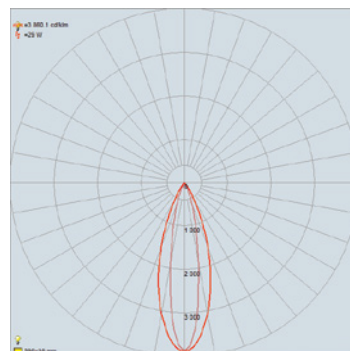

35 x 15° OVAL FWHM  
OPTIC

## WIRING GUIDE

available for download: [www.hunzalighting.com/download.php](http://www.hunzalighting.com/download.php)

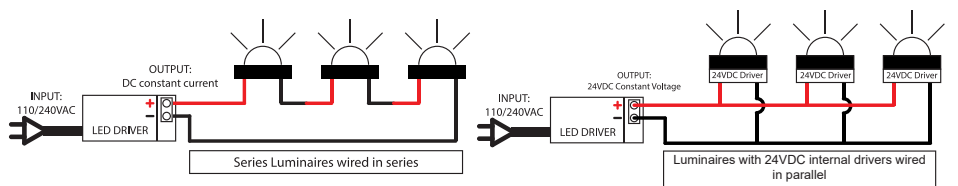

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country

Specifications may change without notification

MAY 2019