


# Cube Bollard Quartz

CBOLQZ

## DESCRIPTION

The Cube Bollard is ideal for illuminating walkways and pathways. With its sleek, simple yet bold appearance, these bollards will greatly enhance your outdoor space with a distinctive modern flair.

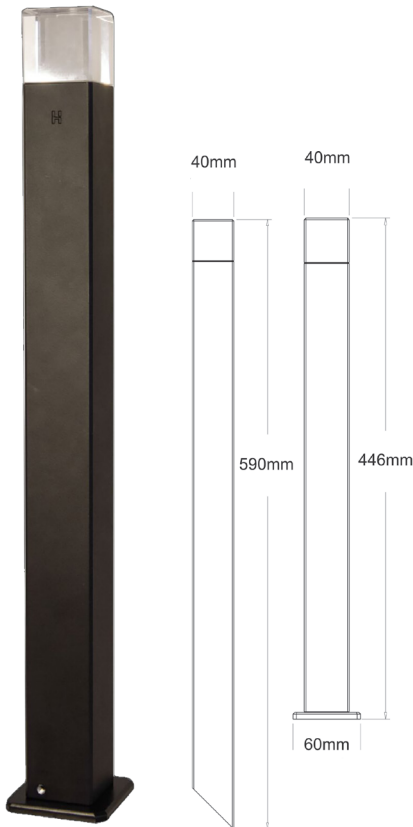

## PURE LED

LED Chip	Cree XPG-3 Plug and Play, field replaceable PCB board, 3Vf
Output	120 Lumens @ 700mA max
Lumens Per Watt	70lm/1W, 60lm/2W
Power Consumption	2.1 watts @700mA
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	90 standard
Beam Angle	Asymmetric & 360 Degrees

\*Specification for pureled only, there are no other alternative lamp sources for this fixture.

## PHYSICAL PROPERTIES

Materials	Powdercoated Aluminium
Ingress Protection	IP66
Standards	AS/NZS 61046, UL 1838, 2108, CSA C22.2 No. 250.7, 250.0-08, CE

## POWER SUPPLY OPTIONS

DRIVER REQ FOR SERIES WIRED ( CC FORMAT ) \*\* | TRANSFORMER REQ FOR PARALLEL WIRED ( CV FORMAT )\*\*\*

\*\* See pages 2,6-9 power supplies

\*\*\* See pages 11-12 power supplies

CATEGORY  
POLE MOUNTED

### LUMINAIRE

CBOLQZ

### POWER

- /L/S 700mA INPUT (CC) SERIES WIRED
- /L/B3 1W, 12VAC INPUT (CV) PARALLEL WIRED
- /L/B7 2W, 12VAC INPUT (CV) PARALLEL WIRED

#### /L/S PURELED SERIES WIRED

Remote constant current driver required.  
Individual fixtures require:  
3VDC@700mA,  
700mA maximum

### COLOUR

- 2 2700K
- 3 3000K
- 4 4000K
- A AMBER
- B BLUE
- R RED

#### /L/B PURELED PARALLEL WIRED

Remote 240V to 8-24VAC transformer required.  
Buck Bullet Driver on Flex.  
Input: 8-24VAC.  
Output: 3VDC @ B3=350mA, B7=700mA

### ACCESSORIES

- CJK
- FM

CABLE JOINT KIT  
FLANGE MOUNT

### MATERIAL/ FINISH

ALUMINIUM

- BK BLACK
- BZ BRONZE
- OGR OLIVE GREEN
- WH WHITE
- WB WHITE BIRCH
- DG DARK GREY
- STAR SILVER STAR
- CT CORTEN

PRODUCT CONFIGURATION