

Wall Spot ULTRA

WS/U

DESCRIPTION

The Ultra Wall Spot has been designed to be mounted on vertical surfaces. It can be used for wall washing, to provide directional light, and to highlight architectural features and structural elements. It has a fully adjustable head allowing 360 degrees rotation and 0-80 degrees elevation and can then be fixed in place using the inbuilt locking mechanism.

All Hunza products have an extra layer of powdercoat to ensure maximum corrosion protection.




PURE LED	
LED Chip	Cree CXA 2540 Plug and Play, field replaceable PCB boards, 37Vf
Output	5000 lumens @ 1400mA max
Lumens Per Watt	90 lm/W
Power Consumption	52 watts
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	80 standard, 90+ optional
Beam Angle	13, 22, 33, 51 Degrees

*Specification for pureled only, there is no alternative lamp options for this fixture.

PHYSICAL PROPERTIES	
Materials	Powdercoated Aluminium with 316 Stainless fixings
Ingress Protection	IP66 +
Impact Restistance	IK10
Standards	AS/NZS 61046, UL 1598

POWER SUPPLY OPTIONS	
DRIVER REQ FOR SERIES WIRED (CC FORMAT) ** I NO DRIVER REQ FOR RETRO 'R' (INTEGRAL 230V IN)	

** Contact sales office

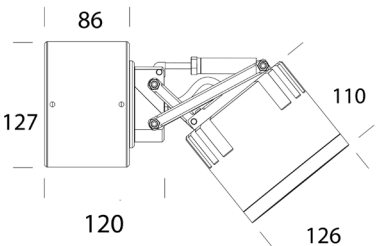

CATEGORY
ARCHITECTURAL ULTRA RANGE

LUMINAIRE	POWER	BEAM	COLOUR	ACCESSORIES					MATERIAL/ FINISH
WS/U									
/L/S	1400mA INPUT (CC) SERIES WIRED	22	22°	2	2700K	HCL	HEX CELL LOUVRE	ALUMINIUM BK BZ OGR WH WB DG STAR CT	
/L/R	RETRO, 110/240V DRIVER	33	33°	3	3000K	SNT	SMOOT		
		51	51°	4	4000K	GG	GLARE GUARD		
		13	13°	39	3000K, 90+ CRI	FL	FROSTED LENS		
			Requires lens ring extension						
/L/S PURELED SERIES WIRED Constant current driver (included-1400mA). Individual fixture require 37VDC @ 1400mA maximum. 0-10 volt dimming.		/L/R PURELED 110/277VAC RETRO DRIVER Constant current driver (included). Input: 240 VAC. Output: 60 watts total 37VDC @ 1400mA 0-10 volt dimming.							

PRODUCT CONFIGURATION