

Tilting Eave square 6 Watt

ESQ/T6/L

DESCRIPTION

The Tilting Eave Square 6 Watt is a recessed downlight, ideal for installation in eaves, soffits, entrance ways, verandahs, carports or covered decks. It can also be used in bathrooms, kitchens or where moisture transfer or decibel rating is a minimum requirement. The "Eyeball" allows 360 degree rotation and 25 degree tilt from centre. The square shape works well in modern installations and is available in Solid Copper, 316 Stainless and powdercoated Aluminium.

PURE LED

LED Chip	Cree XHP-50-2 Plug and Play, field replaceable LED board, 6Vf
Output	600 lumens @ 1050mA max
Lumens Per Watt	100lm/W
Power Consumption	6 watts @1050mA
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	90 standard
Beam Angle	15, 25, 38, 60 degrees

*Specification for pureled only, there are no other alternative lamp sources for this fixture.

PHYSICAL PROPERTIES

Materials	Powdercoated Aluminium, Solid Copper or 316 Stainless Steel
Ingress Protection	IP66
Standards	AS/NZS 61046, UL2108


POWER SUPPLY OPTIONS

DRIVER REQ FOR SERIES WIRED (CC FORMAT) ** | TRANSFORMER REQ FOR PARALLEL WIRED (CV FORMAT)**

** See pages 3-5,7,9 power supplies

*** See pages 11-12 power supplies

CATEGORY
CEILING MOUNT

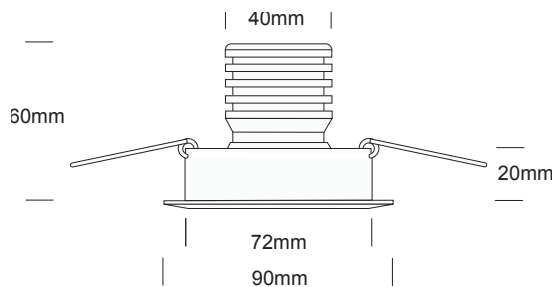

PRODUCT CONFIGURATION

LUMINAIRE

ESQ/T6

POWER

/L/S	1050mA INPUT (CC) SERIES WIRED
/L/D3	2W, 12VAC INPUT (CV) PARALLEL WIRED
/L/D7	4W, 12VAC INPUT (CV) PARALLEL WIRED
/L/D10	6W, 12VAC INPUT (CV) PARALLEL WIRED
/L/DC7	9-36VDC, 700mA

/L/S PURELED SERIES WIRED

Remote constant current driver required.
Individual fixtures require:
6VDC@1050mA,
1050mA maximum

BEAM

15	15°	2
25	25°	3
38	38°	4
60	60°	

/L/D PURELED PARALLEL WIRED

Remote 240V - 12VAC transformer required. Hunza integrated plug and play driver included.
Input: 9-15VAC.
Output: 6VDC @ D3=350mA,
D7=700mA, D10=1050mA

COLOUR

ACCESSORIES

2700K	FL
3000K	CK
4000K	

FROSTED LENS
CABLE JOINT KIT

MATERIAL/ FINISH

BK	BLACK
BZ	BRONZE
OGR	OLIVE GREEN
WH	WHITE
WB	WHITE BIRCH
DG	DARK GREY
STAR	SILVER STAR
CT	CORTEN
COP	SOLID COPPER
SS	STAINLESS STEEL