

Floor Light Dark Lighter
Floor Light Dark Lighter Square

FLDK
FLDKSQ

DESCRIPTION

The Floor Light Dark Lighter is a compact up-lighter with minimal glare. The glare control has been further enhanced by the inclusion of a matte black interior.



PURE LED

LED Chip	Cree XHP-50-2 Plug and Play, field replaceable LED board, 6Vf
Output	600 lumens @ 1050mA max
Lumens Per Watt	100lm/W
Power Consumption	6 Watts @1050mA
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	90 standard
Beam Angle	15, 25, 38, 60 degrees

*Specification for pureled only, for retrofit lamp options please see alternative lamps page.

PHYSICAL PROPERTIES


Materials	316 Stainless Steel, Solid Copper
Ingress Protection	IP67
Standards	AS/NZS 61046, UL 1838, 2108, CSA C22.2 No. 250.7, 250.0-08, CE

POWER SUPPLY OPTIONS


DRIVER REQ FOR SERIES WIRED (CC FORMAT) ** I TRANSFORMER REQ FOR PARALLEL WIRED (CV FORMAT)***
NO DRIVER REQ FOR GU10

** See pages 3-5,7,9 power supplies

*** See pages 11-12 power supplies

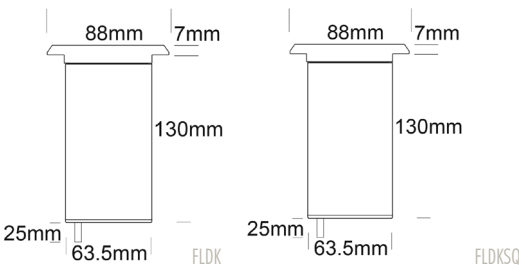

CATEGORY
RECESSED & INGROUND

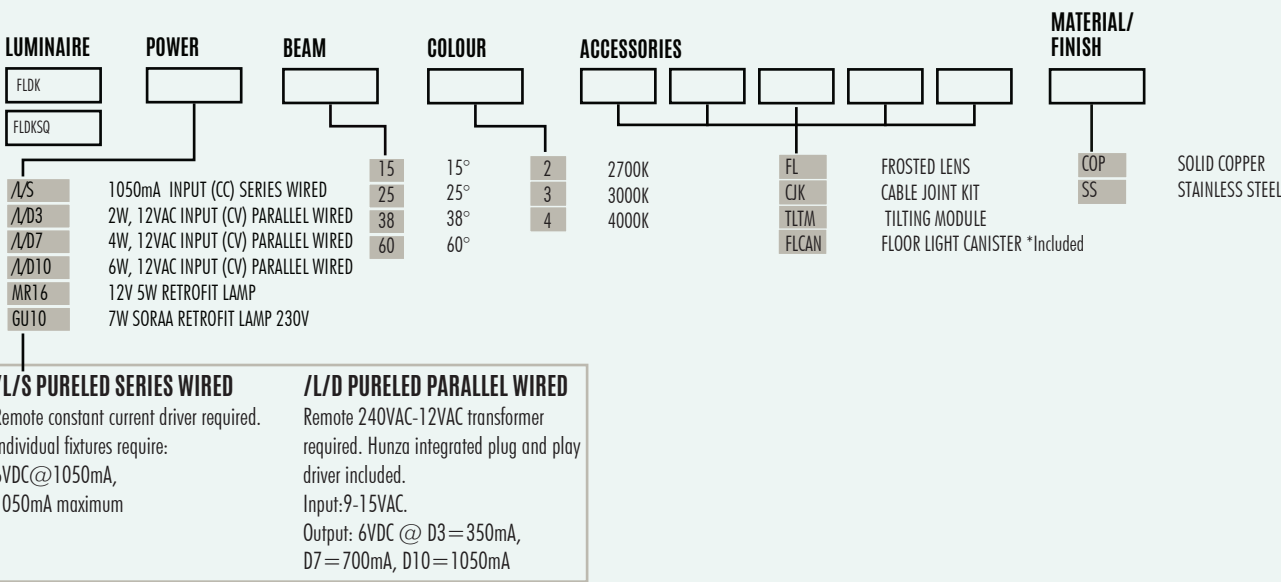

PRODUCT CONFIGURATION