

Cube Wall Light

CWL/L

DESCRIPTION

The Cube Wall Light is designed to be wall mounted for multiple lighting applications. The cube wall light can be used as a spot light or it can be locked into place for use as an uplight or downlight. Features a round back plate so the fixture can be rotated to suit your application.


PURE LED	
LED Chip	Cree XHP-3 Plug and Play, field replaceable LED board, 3Vf
Output	120 lumens @ 700mA max
Lumens Per Watt	60lm/W
Power Consumption	3.15 watts @1050mA (Ali only), 2.1 watts @700mA
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	90 standard
Beam Angle	15, 25, 45 degrees

*Specification for pureled only, there are no other alternative lamp sources for this fixture.

PHYSICAL PROPERTIES	
Materials	Powdercoated Aluminium or 316 Stainless Steel
Ingress Protection	IP66
Standards	AS/NZS 61046, UL 1838, 2108, 1598, CSA 22.2 No. 250.7, 250.0-08, 250.0, CE

POWER SUPPLY OPTIONS	
DRIVER REQ FOR SERIES WIRED (CC FORMAT) **	

** See pages 2,6-9 power supplies

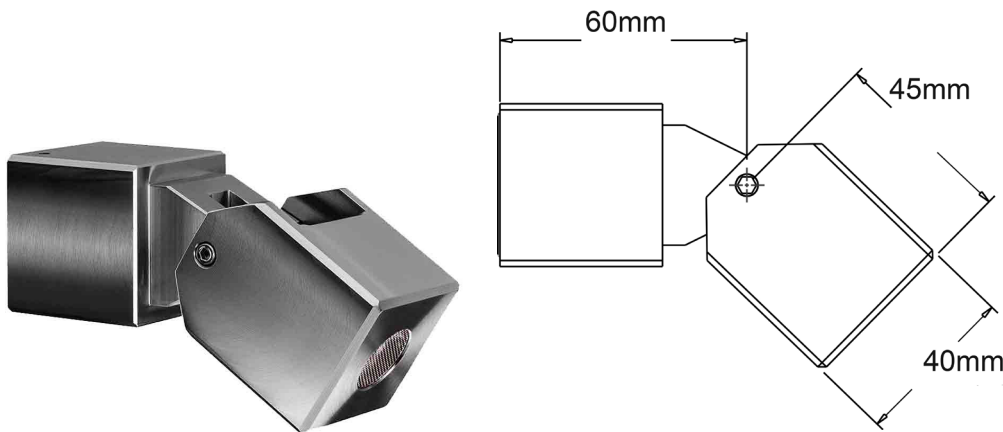

CATEGORY
WALL MOUNT

LUMINAIRE

CWL/L

POWER

700mA INPUT (CC) SERIES WIRED

BEAM

15
25
45

COLOUR

15°
25°
45°

ACCESSORIES

2
3
4
A
B
G
R

2700K
3000K
4000K
AMBER
BLUE
GREEN
RED

CJK

CABLE JOINT KIT

MATERIAL/
FINISH

BK
BZ
OGR
WH
WB
DG
STAR
CT
SS

BLACK
BRONZE
OLIVE GREEN
WHITE
WHITE BIRCH
DARK GREY
SILVER STAR
CORTEN
STAINLESS STEEL

/L/S PURELED SERIES WIRED,
Remote constant current driver required.
Individual fixtures require: 3VDC@
700mA

PRODUCT CONFIGURATION